



City_{of}
Louisville

COLORADO ▪ SINCE 1878

2025 STREET RESURFACING PROJECT

PREPARED BY:
CITY OF LOUISVILLE

JANUARY 2025

Table of Contents

Invitation to Bid.....	1
Instructions to Bidders	3
1. Defined Terms.....	3
2. Copies of Bidding Documents	3
3. Qualification of Bidders	3
4. Examination of Contract Documents and Site	4
5. Availability of Lands for Work, Etc.	6
6. Interpretations and Addenda	6
7. Bid Security	6
8. Contract Time.....	7
9. Liquidated Damages.....	7
10. Substitute and “Or Equal” Items.....	7
11. Subcontractors, Suppliers, and Others	7
12. Bid Form	8
13. Submission of Bids	9
14. Modification and Withdrawal of Bids	9
15. Opening of Bids.....	10
16. Bids to Remain Open Subject to Acceptance.....	10
17. Award of Contract.....	10
18. Contract Security.....	12
19. Signing of Agreement.....	12
20. Special Legal Requirements	12
21. Sales and Use Taxes	13
22. Retainage	13
23. Mistakes in Bidding Instructions	13
Bid Form.....	14
Schedule of Unit Prices	16
Bid Bond	21
Schedule of Subcontractors	23
Anti-Collusion Affidavit	24
Certification of EEO Compliance	25
Agreement	26
Article 1. Work.....	26
Article 2. Contract Times	26
Article 3. Contract Price.....	27
Article 4. Payment Procedures	27
Article 5. Contractor’s Representations	28
Article 6. Contract Documents	29
Article 7. Miscellaneous.....	30
Article 8. Other Provisions.....	31
Performance Bond	32
Labor and Material Payment Bond	34
Notice of Award	36
Notice to Proceed	37
Change Order Form.....	38
Field Order Form	39
Work Change Directive Instructions	40
Work Change Directive Form.....	41
Application for Payment Form.....	42

Contractor's Proposal Request Form	43
Contractor's Overtime Request Form.....	44
Certificate of Substantial Completion Form	45
Final Inspection Report Form.....	47
Certificate of Final Completion Form.....	48
Guarantee Period Inspection Report Form.....	49
Final Claim Release & Acceptance Form.....	50
Claim Release – Subcontractor/Supplier	52
General Conditions	53
Article 1. Definitions	53
1.0 Abnormal Weather.....	53
1.1 Addenda	53
1.2 Agreement.....	53
1.3 Application for Payment	53
1.4 Asbestos	53
1.5 Bid.....	53
1.6 Bidding Documents	53
1.7 Bidding Requirements.....	53
1.8 Bonds.....	53
1.9 Change Order	53
1.10 Contract Day.....	53
1.11 Contract Documents	53
1.12 Contract Price.....	54
1.13 Contract Times	54
1.14 CONTRACTOR.....	54
1.15 Defective	54
1.16 Drawings.....	54
1.17 Effective Date of the Agreement	54
1.18 ENGINEER	54
1.19 OWNER'S Consultant.....	54
1.20 Field Order.....	54
1.21 General Requirements	54
1.22 Hazardous Waste	54
1.23 Laws and Regulation: Laws or Regulations	55
1.24 Liens	55
1.25 Milestone	55
1.26 Notice of Award	55
1.27 Notice to Proceed.....	55
1.28 OWNER.....	55
1.29 Partial Utilization	55
1.30 PCBs.....	55
1.31 Petroleum.....	55
1.32 Plans	55
1.33 Product.....	55
1.34 Project	55
1.35 Provide	55
1.36 Radioactive Material	55
1.37 Resident Project Representative.....	55
1.38 Samples	56
1.39 Shop Drawings.....	56
1.40 Specifications	56

1.41	Subcontractor.....	56
1.42	Substantial Completion.....	56
1.43	Supplementary Conditions.....	56
1.44	Supplier	56
1.45	Underground Facilities	56
1.46	Unit Price Work	56
1.47	Work.....	56
1.48	Work Change Directive.....	56
1.49	Written Amendment.....	57
Article 2. Preliminary Matters		57
	Delivery of Bonds	57
	Copies of Documents	57
	Commencement of Contract Times; Notice to Proceed	57
	Proposed Project Schedule	57
	Starting the Work	58
	Before Starting Construction.....	58
	Preconstruction Conference	58
	Initially Acceptable Schedules	58
Article 3. Contract Documents: Intent, Amending, Reuse		59
	Intent.....	59
	Reference to Standards & Specifications of Technical Societies; Reporting and Resolving Discrepancies.....	59
	Amending and Supplementing Contract Documents.....	60
	Reuse of Documents	61
Article 4. Availability of Lands; Subsurface and Physical Conditions; Reference Points		61
	Availability of Lands.....	61
	Subsurface and Physical Conditions.....	61
	Reports and Drawings	62
	Subsurface Conditions.....	62
	Physical Conditions.....	62
	Limited Reliance by CONTRACTOR authorized; Technical Data.....	62
	Physical Conditions - Underground Facilities.....	63
	Shown or Indicated	63
	Not Shown or Indicated	64
	Reference Points	64
	Asbestos, PCBs Petroleum, Hazardous Waste, or Radioactive Material	64
Article 5. Bonds and Insurance		66
	Performance, Payment, and Other Bonds	66
	Licensed Sureties and Insurers; Certificates of Insurance.....	66
	CONTRACTOR's Liability Insurance.....	67
	OWNER's Liability Insurance	68
	Property Insurance	68
Article 6. CONTRACTOR's Responsibilities		69
	Supervision and Superintendence	69
	Labor, Materials, and Equipment.....	69
	Progress Schedule	70
	Substitutes and "Or-Equal" Items	70
	"Or-Equal"	71
	Substitute Items	71
	CONTRACTOR's Expense	72
	Substitute Construction Methods or Procedures	72

ENGINEER's Evaluation.....	72
Concerning Subcontractors, Suppliers, and Others	72
Patent Fees and Royalties	74
Permits	74
Laws and Regulations.....	75
Taxes.....	75
Use of Premises.....	75
Record Documents.....	76
Safety and Protection.....	76
Safety Representative	77
Hazard Communication Programs	77
Emergencies	77
Shop Drawings and Samples	77
Submittal Procedures.....	78
Continuing the Work.....	79
CONTRACTOR's General Warranty and Guarantee.....	79
Indemnification	81
Survival of Obligations.....	81
Article 7. Other Work	81
Related Work at Site	81
Coordination.....	82
Article 8. Owner's Responsibilities	83
Article 9. Engineer's Status During Construction	83
OWNER's Representative	83
Visits to Site	84
Project Representative.....	84
Duties and Responsibilities	84
Schedules.....	84
Conferences and Meetings	85
Liaison.....	85
Shop Drawings and Samples	85
Review of Work, Rejection of Defective Work, Inspections, and Tests	85
Interpretation of Contract Documents	86
Modifications	86
Records.....	86
Reports	86
Payment Requests.....	86
Certificates, Maintenance, and Operations Manuals	87
Completion.....	87
Limitation of Authority.....	87
Clarifications and Interpretations	88
Authorized Variations in Work.....	88
Rejecting Defective Work.....	88
Shop Drawings, Change Orders, and Payments.....	88
Determinations for Unit Prices.....	88
Decisions on Disputes	88
Limitations on ENGINEER's Authority and Responsibilities	89
Article 10. Changes in the Work.....	90
Article 11. Change of Contract Price.....	91
Cost of the Work	91
Cash Allowances.....	96

Unit Price Work	96
Article 12. Change of Contract Times	97
Article 13. Tests and Inspections; Correction, Removal, or Acceptance of Defective Work.....	98
Notice of Defects	98
Access to Work.....	98
Tests and Inspections	99
Uncovering Work	99
OWNER May Stop the Work.....	100
Correction or Removal of Defective Work	100
Correction Period	100
Acceptance of Defective Work.....	101
OWNER May Correct Defective Work.....	101
Article 14. Payments to Contractor and Completion	102
Schedule of Values	102
Application for Progress Payment.....	102
CONTRACTOR's Warranty of Title	102
Review of Applications for Progress Payment	102
Substantial Completion	105
Partial Utilization	105
Final Inspection	106
Final Application for Payment.....	106
Final Payment and Acceptance	107
Waiver of Claims	107
Article 15. Suspension of Work and Termination.....	108
OWNER May Suspend Work	108
OWNER May Terminate	108
CONTRACTOR May Stop Work or Terminate	109
Article 16. Miscellaneous.....	109
Giving Notice	109
Computation of Times.....	110
Notice of Claim	110
Cumulative Remedies.....	110
Professional Fees and Court Costs Included	110
Interest.....	110
Third Parties	110
Severability	111
Equal Opportunity Employer.....	111
Supplementary Conditions	112
SECTION 01010 - SUMMARY OF WORK	1
SECTION 01025 - MEASUREMENT AND PAYMENT	1
SECTION 01091 - REFERENCE STANDARDS	1
SECTION 01300 - SUBMITTALS.....	1
SECTION 01410 - TESTING AND INSPECTIONS	1
SECTION 01500 - TEMPORARY FACILITIES, CONTROLS, AND SERVICES	1
SECTION 01700 - CONTRACT CLOSEOUT	1
SECTION 02070 - DEMOLITION	1
SECTION 02450-C - CEMENT	1
SECTION 02450-S – SLURRY SEAL.....	1
3.0 MATERIALS.....	2
5.0 SPECIAL CONDITIONS.....	6
6.0 METHOD OF MEASUREMENT AND PAYMENT	7

SECTION 02500 - ASPHALT.....	1
SECTION 02580 - PAVEMENT MARKING	1
SECTION 02600 - CONSTRUCTION ZONE TRAFFIC CONTROL.....	1
SECTION 07900 – CRACK SEALANT	1

Invitation to Bid

Sealed Bids will be received by the

CITY OF LOUISVILLE, STATE OF COLORADO

Hereinafter referred to as OWNER, at 749 Main Street, Louisville, Colorado 80027, until **11:00 a.m.**, MST, **February 12, 2025** for the

2025 STREET RESURFACING PROJECT

At said place and time, all Bids that have been duly received will be publicly opened and read aloud. Bids received after said closing time of 11:00 a.m. MST will not be accepted and be returned unopened. Bids shall be in a sealed envelope plainly marked with the Project Name and Date and addressed to:

City of Louisville
Office of City Engineer
749 Main Street
Louisville, Colorado 80027

The Work for which the Bid is requested consists of asphalt patching, crack sealing, asphalt milling, asphalt leveling, asphalt paving, pavement marking, traffic control, including all work appurtenant thereto, on various streets within the City of Louisville, Colorado.

Digital copies of the Bidding Documents will be available after January 24, 2025, on-line through Rocky Mountain Bid System located at

Bids will only be accepted from BIDDERS who are prequalified as a General Contractor by the City of Louisville City Engineer, and who are recorded by Rocky Mountain Bid System and by the City Engineer as having received the Bidding Documents. City Engineer will verify with Rocky Mountain Bid System for Plan Holder list. City of Louisville Pre-qualification forms must be received at the office of the City Engineer by close of business (5:00 p.m.) Tuesday, February 5, 2025. Pre-qualification forms received after this date and time are not guaranteed to be approved by the required date.

Bids will be received on a unit and lump sum price basis as described in the Bidding Documents.

When a BIDDER submits a Bid, that Bid shall include the Schedule of Subcontractors, which shall identify each element of the Work to be subcontracted. Traffic control subcontractors shall be prequalified by the City of Louisville. Other subcontractors whose subcontract exceeds five percent of the Total Bid Price shall be prequalified by the City of Louisville, City Engineer for their specific portion of the Work.

Each Bid shall contain evidence of BIDDER's qualification to do business in the state of Colorado or covenant to obtain such qualification.

Each Bid must be accompanied by a Bid security consisting of a properly Certified Check, Cashier's Check, or Bid Bond, in the amount of five (5) percent of BIDDER's Total Bid Price, without conditions, payable to the City of Louisville. Bid security will be retained by the City until the seventh day after the Effective Date of the Agreement whereupon Bid security furnished by such Bidders will be returned. Bid

security with Bids, which are not competitive, will be returned within fourteen days after the Bid opening. No Bid will be considered unless accompanied by such Bid security.

The SUCCESSFUL BIDDER will be required to furnish a performance bond and a labor and material payment bond to the City of Louisville guaranteeing faithful performance and the payment of all bills and obligations arising from the performance of the Contract.

No Bid may be withdrawn within a period of sixty (60) days after the date fixed for opening Bids.

The City of Louisville reserves the right to award the contract by sections, to reject any or all Bids, and to waive any informalities and irregularities therein.

The City of Louisville assumes no responsibility for payment of any expenses incurred by any respondent to this Invitation to Bid.

Preference is hereby given to materials, supplies, and provisions produced, manufactured, or grown in Colorado, quality and price being equal to articles offered by competitors outside of the State.

A mandatory pre-bid conference with representatives of prospective BIDDERS will be held at **10:00 a.m.**, MST, on **February 4, 2025**. This meeting will be held virtually. Representatives of the City will be present to discuss the Project. Prospective BIDDERS are invited to attend and present their questions relative to this Bid at this conference. **Attendance at this pre-bid conference will be required to submit a Bid.** Failure to attend will result in the rejection of the bid.

Microsoft Teams [Need help?](#)

[Join the meeting now](#)

Meeting ID: 251 035 867 471

Passcode: Nu27WL6T

Dial in by phone

[+1 321-430-0794,,168770472#](#) United States, Orlando

[Find a local number](#)

Phone conference ID: 168 770 472#

https://teams.microsoft.com/l/meetup-join/19%3ameeting_NjU4OTRhMzYtZjY4NS00NGE2LWJlYWYtYTU5NmQwMzUzZGFk%40thread.v2/0?context=%7b%22Tid%22%3a%22bdc34c2-e919-4b54-b6ba-01080ac35832%22%2c%22Oid%22%3a%228e6cc62f-e7b4-473f-98dc-149b3dd13f61%22%7d

The City of Louisville is an Equal Opportunity Employer.

City of Louisville, Colorado

City Engineer

1st Publication: January 24, 2025

2nd Publication: January 31, 2025

Instructions to Bidders

1. Defined Terms

Terms used in these Instructions to Bidders, which are defined in the General Conditions of this Manual have the meanings assigned to them in the General Conditions.

Certain additional terms used in these Instructions to Bidders have the meanings indicated below which are applicable to both the singular and plural thereof.

- 1.1 The term "BIDDER" means one who submits a Bid directly to OWNER, as distinct from a sub-bidder, who submits a bid to a BIDDER.
- 1.2 The term "ISSUING OFFICE" means the office from which the Bidding Documents are to be issued and where the bidding procedures are to be administered.
- 1.3 The term "SUCCESSFUL BIDDER" means the lowest, qualified, responsible, and responsive BIDDER to whom OWNER (on the basis of OWNER's evaluation as hereinafter provided) makes an award.
- 1.4 The term "Bidding Documents" includes the Invitation to Bid, Instructions to Bidders, the Bid Form, and the Contract Documents (including all Addenda issued prior to receipt of Bids).

2. Copies of Bidding Documents

- 2.1 Complete sets of Bidding Documents stated in the Invitation to Bid may be obtained from the Issuing Office. No partial sets will be issued. The Bidding Documents may be examined at the locations identified in the Invitation to Bid.
- 2.2 Complete sets of Bidding Documents shall be used in preparing Bids; neither OWNER nor ENGINEER assumes any responsibility for errors or misinterpretations resulting from the use of incomplete sets of Bidding Documents.
- 2.3 OWNER and ENGINEER in making copies of Bidding Documents available on the above terms do so only for the purpose of obtaining Bids for the Work and do not confer a license or grant for any other use.

3. Qualification of Bidders

- 3.1 **Bids will only be accepted from qualified BIDDERS who are prequalified as a General Contractor by the City of Louisville, City Engineer, and who are recorded by the City Engineer as having received the Bidding Documents. City of Louisville Prequalification forms must be received at the office of the City Engineer by close of business (5:00 p.m.) on Tuesday, February 5, 2025. Prequalification forms received after this date and time are not guaranteed to be approved by the required date.**
- 3.2 Each Bid shall contain evidence of BIDDER's qualification to do business in the state of Colorado or covenant to obtain such qualification.

- 3.3 The apparent low BIDDER shall be required to show that he has handled former work of similar type and that no just claims are pending against such work. No Bid will be awarded to a BIDDER who is engaged on any other work, which would impair his ability to perform or finance this Work.

4. Examination of Contract Documents and Site

- 4.1 It is the responsibility of each BIDDER before submitting a Bid:

- 4.1.1 To examine thoroughly the Contract Documents and related data identified in the Bidding Documents;
- 4.1.2 To visit the site to become familiar with and satisfy BIDDER as to the general, local and site conditions that may affect cost, progress, performance or furnishing of the Work;
- 4.1.3 To consider federal, state and local Laws and Regulations that may affect cost, progress, performance or furnishing of the Work;
- 4.1.4 To study and carefully correlate BIDDER's knowledge and observations with the Contract Documents and other related data; and
- 4.1.5 **To promptly notify ENGINEER of all conflicts, errors, ambiguities or discrepancies, which BIDDER has discovered in or between the Contract Documents and such other related documents.**

- 4.2 BIDDERS are responsible for examining and determining for themselves the location and nature of the proposed Work, the amount and character of the labor and materials required therefor, and the difficulties, which may be encountered. BIDDERS may not rely on oral or written representations made by OWNER, including any reports and drawings identified pursuant to paragraph 4.2.1 and subparagraphs thereof of the General Conditions, unless OWNER has guaranteed in writing that such representation is factually accurate, and by submitting a Bid, each BIDDER waives all liability for any error in any representation made by OWNER to BIDDER. BIDDERS shall, at BIDDER's own expense, inspect the site and its surroundings and conduct such supplementary examinations, investigations, and tests concerning conditions at or contiguous to the site (including surface, and subsurface) which may affect cost, progress, performance, or furnishing of the Work or which relate to any aspect of the means, methods, techniques, sequences, or procedures of construction to be employed by BIDDER and safety precautions and programs incident thereto for performing the Work in accordance with the Contract Documents. By failing to make such an inspection, BIDDER waives all rights to claim extra payment or time extensions due to unexpected conditions, which could have been determined had the site been reasonably inspected. If concealed or unknown conditions differ materially from those ordinarily encountered and generally recognized as inherent in the Work or differ materially from the conditions indicated in the Contract Documents, then an equitable adjustment in the Contract Price or in the Contract Time will be allowed by change order as provided in Article 11 or Article 12 respectively of the General Conditions. By submitting a Bid, BIDDER represents that BIDDER's observations at the site are not inconsistent with the requirements of the proposed Contract Documents, unless otherwise noted by BIDDER.

- 4.2.1 Refer to General Conditions for identification of those reports of explorations and tests of subsurface conditions at or contiguous to the site, which have been utilized by ENGINEER in preparation of the Contract Documents. BIDDER may not rely upon the general accuracy of the "technical data" contained in such reports or upon non-technical data, interpretations, opinions or information contained in such reports or otherwise relating to the subsurface conditions at the site, nor upon the completeness thereof for the purposes of bidding or construction unless OWNER has guaranteed in writing that such data or representations are accurate.
- 4.2.2 Refer to General Conditions for identification of those drawings of physical conditions in or relating to existing surface and subsurface conditions (except Underground Facilities) which are at or contiguous to the site that have been utilized by ENGINEER in preparation of the Contract Documents. BIDDER may not rely upon the general accuracy of the "technical data" contained in such drawings or upon other data, interpretations, opinions or information shown or indicated in such drawings or otherwise relating to such structures, nor upon the completeness thereof for the purposes of bidding or construction unless OWNER has guaranteed in writing that such data or representations are accurate.

Copies of such reports and drawings will be made available by OWNER to any BIDDER on request. Those reports and drawings are not part of the Contract Documents, but the technical data contained therein, upon which BIDDER is entitled to rely upon as factually accurate as provided in Paragraphs 4.2.1 of the General Conditions. BIDDER is responsible for any interpretation or conclusion drawn from any "technical data" or any such data, interpretations, opinions, or information.

- 4.3 Information and data shown or indicated in the Contract Documents with respect to existing Underground Facilities at or contiguous to the site is based upon information and data furnished to OWNER by OWNERS of such Underground Facilities or others, and OWNER and ENGINEER do not assume responsibility for the accuracy or completeness thereof.
- 4.4 On request in advance, OWNER will provide each BIDDER access to the site to conduct such examinations, investigations, explorations, tests, and studies as each BIDDER deems necessary for submission of a Bid. BIDDER shall fill all holes, clean up and restore the site to its former conditions upon completion of such explorations, investigations, tests, and studies.
- 4.5 Reference is made to the General Conditions for the identification of the general nature of work that is to be performed at the site by OWNER or others (such as utilities and other prime contractors) that relates to work for which a Bid is to be submitted. On request, OWNER will provide to each BIDDER for examination access to or copies of Contract Documents (other than portions thereof related to price) for such work.
- 4.6 The submission of a Bid will constitute an incontrovertible representation by BIDDER that BIDDER has complied with every requirement of this Article 4, that BIDDER warrants that it is familiar with all provisions of the Contract Documents, that without exception the Bid is premised upon performing and furnishing the Work required by the Contract Documents and applying the specific means, methods, techniques, sequences or procedures of construction that may be shown or indicated in or expressly required by the Contract Documents, **that BIDDER has given ENGINEER written notice of all conflicts, errors, ambiguities and discrepancies that BIDDER has discovered in the Contract Documents and the written**

resolutions thereof by ENGINEER is acceptable to BIDDER, and that the Contract Documents are generally sufficient to indicate and convey understanding of all terms and conditions for performing and furnishing of the Work.

- 4.7 The provisions of 4.1 through 4.7 of this section, inclusive, do not apply to Asbestos, Polychlorinated biphenyls (PCBs), Petroleum, Hazardous Waste, or Radioactive Material covered by paragraph 4.5 of the General Conditions.

5. Availability of Lands for Work, Etc.

- 5.1 The lands upon which the Work is to be performed will be in the confines of street rights-of-way and public property. All additional lands and access thereto required for temporary construction facilities or storage of materials and equipment are to be obtained and paid for by CONTRACTOR. Easements for permanent structures or permanent changes in existing facilities are to be obtained and paid for by OWNER unless otherwise provided in the Contract Documents.

6. Interpretations and Addenda

- 6.1 All questions about the meaning or intent of the Bidding Documents are to be submitted in writing to ENGINEER. Interpretation or clarifications considered necessary by ENGINEER in response to such questions will be issued only by Addenda mailed or delivered to all parties recorded by ENGINEER as having received Bidding Documents. Questions received less than ten days prior to the date for opening of Bids may not be answered. Only questions answered by formal written Addenda will be binding. **Oral and other interpretations or clarifications will be without legal effect.**
- 6.2 Addenda may also be issued to modify the Bidding Documents as deemed advisable by ENGINEER.

7. Bid Security

- 7.1 Each Bid must be accompanied by a Bid Security consisting of a properly Certified Check, Cashier's Check, or Bid Bond on the form enclosed herewith, in the amount of five (5) percent of BIDDER's Total Bid Price, without conditions, payable to the City of Louisville, Colorado. The Bid Bond must be executed by a surety meeting the requirements of Paragraph 5.3 of the General Conditions. The cost of the Bid Security shall be included in the bid. The submission of the Bid and Bid Security is a pledge by BIDDER that he will enter into an Agreement with OWNER on the terms stated in his Bid and will, if required, furnish required insurance certificates and bonds, covering the faithful performance of the Agreement and the payment of all obligations arising thereunder.
- 7.2 The Bid Security of the SUCCESSFUL BIDDER will be retained until such BIDDER has executed the Agreement, furnished the required contract security and met the other conditions of the Notice of Award, whereupon the Bid Security will be returned. If the SUCCESSFUL BIDDER fails to execute, enter into or deliver an Agreement in accordance with an accepted bid proposal, or fails to furnish the required bonds or certificates, within ten (10) days from the mailing of the Notice of Award, or if BIDDER has been guilty of collusion with other BIDDERS in submitting the Bid, OWNER may annul the Notice of Award and the Bid Security shall be forfeited to and retained by OWNER as liquidated damages and not as a penalty. By

submitting the Bid security with the bid proposal, BIDDER agrees to liquidated damages in the event BIDDER fails to enter into the Agreement with OWNER. OWNER shall not have to prove actual damages suffered in order to retain the Bid Security as liquidated damages. OWNER and BIDDER agree that liquidated damages are appropriate because the anticipated actual damages are uncertain in amount and difficult to forecast accurately. OWNER and BIDDER agree that the amount of the Bid Security is a reasonable estimate of damages and not disproportionate to the anticipated loss or injury. The Bid Security of other bidders whom OWNER believes to have a reasonable chance of receiving the award may be retained by OWNER until the seventh day after the Effective Date of the Agreement whereupon Bid Security furnished by such bidders will be returned. Bid Security with Bids that are not competitive will be returned within fourteen days after the Bid opening.

8. Contract Time

- 8.1 The number of days within which, or the dates by which, the Work is to be completed (the Contract Time) is set forth in the Agreement.

9. Liquidated Damages

- 9.1 Provisions for liquidated damages, if any, are set forth in the Agreement and General Conditions.

10. Substitute and "Or Equal" Items

- 10.1 The Contract, if awarded, will be on the basis of materials and equipment described on the Drawings or specified in the Specifications without consideration of possible substitute or "or equal" items. Whenever it is indicated on the Drawings or specified in the Specifications that a substitute or "or - equal" item of material or equipment may be furnished or used by CONTRACTOR if acceptable to ENGINEER, application for such acceptance will not be considered by ENGINEER until after the Effective Date of the Agreement. The procedure for submission of any such application by CONTRACTOR and consideration by ENGINEER is set forth in paragraphs 6.7.1, 6.7.2, and 6.7.3 of the General Conditions and may be supplemented in the General Requirements.

11. Subcontractors, Suppliers, and Others

- 11.1 **When a BIDDER submits a Bid, that Bid shall include the Schedule of Subcontractors, which shall identify each element of the Work to be subcontracted. Traffic control subcontractors shall be prequalified and other Subcontractors whose subcontract exceeds five percent of the Total Bid Price shall be prequalified by the City of Louisville, City Engineer for their specific portion of the Work.**
- 11.2 If OWNER, who after due investigation has reasonable objection to any proposed Subcontractor, other person or organization, may before the Notice of Award is given, request the apparent SUCCESSFUL BIDDER to submit a substitute Subcontractor acceptable to the City without an increase in Bid price. If the apparent SUCCESSFUL BIDDER declines to make any such substitution, OWNER may award the contract to the next lowest BIDDER that proposes to use acceptable Subcontractors and other persons and organizations. The declining to make requested substitutions will not constitute grounds for sacrificing the Bid security of any BIDDER. Any Subcontractor or other person or organization listed and to

whom OWNER does not make written objection prior to the giving of the Notice of Award will be deemed acceptable to OWNER subject to revocation of such acceptance after the Effective Date of the Agreement as provided in Paragraph 6.8.2. of the General Conditions.

11.3 CONTRACTOR shall not be required to employ any Subcontractor, Supplier, other person, or organization against whom CONTRACTOR has reasonable objection.

11.4 The Contract Documents will take precedence over any nonconforming data submitted. Any Bid specifically conditioned upon furnishing equipment or materials, which are not responsive to the Contract Documents, will not be considered.

12. Bid Form

12.1 The Bid Form is included in the Contract Documents.

12.2 All blanks on the Bid Form must be completed by printing in ink or by typewriter. All unit prices including lump sums in the unit price schedule are to be expressed in numerals only.

12.3 Bids by corporations must be executed in the corporate name by the president or a vice-president (or other corporate officer accompanied by evidence of authority to sign) and the corporate seal shall be affixed and attested by the secretary or an assistant secretary. The state of incorporation shall be shown below the corporate name.

12.4 Bids by partnerships must be executed in the partnership name and signed by a duly authorized general partner, whose title must appear under the signature and the official address of the partnership must be shown below the signature. A partnership shall give the full names and addresses of all partners and their interest and role in the partnership business.

12.5 All names must be typed or printed in ink below the signature.

12.6 The Bid shall contain an acknowledgment of receipt of all Addenda (the numbers of which must be filled in on the Bid Form).

12.7 BIDDER's business address and telephone number for communications regarding the Bid must be shown.

12.8 Each Bid shall contain evidence of BIDDER's qualification to do business in the state of Colorado or covenant to obtain such qualification.

12.9 No alterations in Bids, or in the printed forms therefor, by erasures, interpolations, or otherwise will be accepted unless each such alteration is signed or initialed by BIDDER; if initialed, OWNER may require BIDDER to identify any alteration so initialed.

12.10 Bids will be based on a combination of unit price and lump sum schedules including alternatives. Unit price schedules shall be bid as provided in Paragraph 12.10.1 below. Lump sum schedules shall be bid as provided in paragraph 12.10.2 below.

12.10.1 Bids for unit price schedules shall be based on a unit price basis. The Total Bid Price will be determined as the sum of the products of the estimated quantity of each

item and the unit price set forth in the Schedule of Unit Prices. The final Contract Price will be subject to adjustment according to final measured, used, or delivered quantities as provided in the Specifications and the unit prices in the Bid Form will apply to such final quantities except that unit prices may be subject to change by Change Order if quantities vary more than 25 percent.

- 12.10.2 Bids for lump sum schedules shall be based on a lump sum basis for each lump sum item.

13. Submission of Bids

- 13.1 Bids shall be submitted at the time and place indicated in the Advertisement of Invitation to Bid and shall be enclosed in an opaque sealed envelope, marked with the Project Title (and, if applicable, the designated portion of the Project for which the Bid is submitted) and name and address of BIDDER, and addressed to the City of Louisville as indicated in the Advertisement of Invitation to Bid accompanied by the Bid Security and other required documents. If the Bid is sent through the mail or other delivery system the sealed Bid shall be enclosed in a separate envelope with the notation "BID ENCLOSED" on the face of the separate sealed envelope.
- 13.2 Bids shall be deposited at the designated location prior to the time and date for receipt of Bids indicated in the Invitation to Bid, or any extension thereof made by Addendum. Bids received after the time and date for receipt of Bids will be returned unopened. BIDDER shall assume full responsibility for timely delivery at the location designated for receipt of Bids.
- 13.3 Oral, telephonic, or telegraphic Bids are invalid and will not receive consideration.
- 13.4 No BIDDER may submit more than one Bid. Multiple Bids under different names will not be accepted from one firm or association.

14. Modification and Withdrawal of Bids

- 14.1 Bids may be modified or withdrawn by an appropriate document duly executed (in a manner that a Bid must be executed) and delivered to the place where Bids are to be submitted at any time prior to the opening of Bids.
- 14.2 Bids may also be modified or withdrawn in person by BIDDER or an authorized representative provided he can prove his identity and authority.
- 14.3 Withdrawn Bids may be resubmitted up to the time designated for the receipt of Bids provided that they are then fully in conformance with these Instructions to Bidders.
- 14.4 If, within twenty-four hours after Bids are opened, any BIDDER files a duly signed, written notice with OWNER and promptly thereafter demonstrates to the reasonable satisfaction of OWNER that there was a material and substantial mistake in the preparation of its Bid, that BIDDER may withdraw its Bid and the Bid security will be returned. Thereafter, that BIDDER will be disqualified from further bidding on the Work to be provided under the Contract Documents.

15. Opening of Bids

- 15.1 Bids will be opened and (unless obviously non-responsive) read aloud publicly as indicated in the Invitation to Bid. An abstract of the amounts of the base Bids and major alternates (if any) will be made available to BIDDERS.

16. Bids to Remain Open Subject to Acceptance

- 16.1 All Bids shall remain open for sixty (60) days after the day of the Bid opening, but OWNER may, in its sole discretion, release any Bid and return the Bid Security prior to that date.

17. Award of Contract

- 17.1 OWNER reserves the right to reject any or all Bids, including without limitation the rights to reject any or all irregular, nonconforming, nonresponsive, unbalanced or conditional Bids and to reject the Bid of any BIDDER if OWNER believes that it would not be in the best interest of the Project to make an award to that BIDDER, whether because the Bid is not responsive or BIDDER is unqualified or of doubtful financial ability or fails to meet any other pertinent standard or criteria established by OWNER. Discrepancies between the multiplication of units of Work and unit prices will be resolved in favor of the unit prices. Discrepancies between the indicated sum of any column of figures and the correct sum thereof will be resolved in favor of the correct sum.
- 17.2 In evaluating Bids, OWNER will consider the qualifications of BIDDERS, whether or not the Bids comply with the prescribed requirements, and such alternates, unit prices and other data, as may be requested in the Bid Form or prior to the Notice of Award.
- 17.3 OWNER will consider the qualifications and experience of Subcontractors and other persons and organizations proposed for those portions of the Work as to which the identity of Subcontractors and other persons and organizations must be submitted. OWNER also will consider the operating costs, maintenance requirements, performance data and guarantees of major items of materials and equipment proposed for incorporation in the Work when such data is required to be submitted prior to the Notice of Award.
- 17.4 OWNER may conduct such investigations as OWNER deems necessary to assist in the evaluation of any Bid and to establish the responsibility, qualifications and financial ability of BIDDER, proposed Subcontractors and other persons and organizations to perform and furnish the Work in accordance with the Contract Documents to OWNER's satisfaction within the prescribed time.
- 17.5 If the contract is to be awarded, it will be awarded to the lowest responsible BIDDER based on the combination of Bid Schedules as determined by OWNER and whose evaluation by OWNER indicates to OWNER that the award will be in the best interest of the Project.
- 17.6 If the contract is to be awarded, OWNER will accept the Bid within sixty days after the Bid opening and will give the SUCCESSFUL BIDDER a Notice of Award within sixty-five days after the day of the Bid opening. OWNER's acceptance of the Bid proposal shall bind the SUCCESSFUL BIDDER to sign the Contract Documents within ten (10) days after the date of the receipt by BIDDER of the Notice of Award. The rights and obligations set forth in the Contract Documents shall become effective only with the signature of the **MAYOR** on behalf

of the City.

- 17.7 It is OWNER'S intention to award the entire contract as bid. OWNER reserves the right to award a contract that is in the best interest of OWNER and within the amount budgeted. OWNER has or will have prior to award appropriated monies at least equal to the contract amount. The Total Bid Price, subject to the other considerations herein, shall be the basis of award. Quantities may be reduced in order to reach budget amount, in that case the unit prices shall govern to determine the lowest Total Bid Price, which shall then determine the basis of award. If quantity reductions are required, quantities may be reduced from any item. Bid may be awarded by adding (or subtracting) the base bid plus any add alternatives, at OWNER's sole discretion.

BIDDER acknowledges that OWNER has the right to delete any item of the Schedule of Unit Prices or change quantities and locations in any item at OWNER's sole discretion without affecting the contract prices of any item of the Contract so long as the deletion or change does not exceed twenty-five percent (25%) of the Total Bid Price. Notwithstanding the foregoing, if a reduction is made in Unit Price items or quantities, the lump sum cost for traffic control shall be reduced by the same percentage as the percentage change made from the original unit price cost/quantity to the reduced original unit price cost/quantity.

Quantities listed in the Schedule of Unit Prices are approximate and are for the purpose of comparing bids. These quantities have been estimated and are for the general information of BIDDER. Quantities are not guaranteed.

- 17.8 In addition to Paragraph 17.1 of the Instructions to Bidders, in evaluating Bids, OWNER will consider Bids irregular, and intends to reject Bids, for any of the following substantial reasons:

- 17.8.1 Unsigned Bid Form;
- 17.8.2 Bid Forms which have items omitted by BIDDER;
- 17.8.3 Altering a Bid as to specified time of commencement of completion of Work;
- 17.8.4 Bid Forms not accompanied by a Bid Security of character indicated or of an amount less than indicated;
- 17.8.5 If the Bid Form is on a form other than that provided in Contract Documents, or if the Bid Form is altered;
- 17.8.6 If there are unauthorized additions, conditional or alternate Bids, or discrepancies of any nature that make the Bid Form incomplete, indefinite, or ambiguous as to its meaning;
- 17.8.7 If BIDDER adds any provisions reserving the right to accept or reject an award, or to enter into a Contract pursuant to an award;
- 17.8.8 If the Schedule of Unit Prices in the Bid Form does not contain a unit price for each item number listed; or

- 17.8.9 Submitting more than one Bid, where there is evidence that any BIDDER has an interest in more than one Bid for the same work, or where there is evidence of collusion or other illegal activities between BIDDERS. In addition to any other remedies OWNER may have, OWNER may retain as liquidated damages for the disruption of the bidding process the Bid Security of all bidders involved in collusion or other illegal activities. BIDDER and OWNER agree that the amount of the Bid Security is a reasonable estimate of damages for collusion and other illegal activities on the part of BIDDER and not disproportionate to the anticipated loss or injury. A person or entity, which has quoted prices to a BIDDER, is not hereby disqualified from quoting prices to other BIDDERS or from submitting a direct bid on its own behalf.
- 17.8.10 In evaluating Bids, OWNER may consider Bids informal, and may, in its sole discretion, elect to waive informalities for the following minor reasons:
- 17.8.11 Omission of dates when signed, or title of person signing;
- 17.8.12 Failure to acknowledge an addendum, which does not affect quantity, quality, time, or price;
- 17.8.13 Submission of a Bid in an unsealed envelope;
- 17.8.14 Unit price Bids which include reconcilable arithmetic errors may be corrected if it does not change the unit price; or
- 17.8.15 Unit price Bids which include reconcilable arithmetic errors may be corrected, if it does not change the amount on which the award will be based.

18. Contract Security

- 18.1 Paragraph 5.1 of the General Conditions set forth OWNER's requirements as to performance and payment Bonds. When the SUCCESSFUL BIDDER delivers the executed Agreement to OWNER it shall be accompanied by the required performance and payment Bonds.

19. Signing of Agreement

- 19.1 When OWNER gives a Notice of Award to the SUCCESSFUL BIDDER, it will be accompanied by the required number of unsigned counterparts of the Agreement with all other written Contract Documents attached. Within ten (10) days after CONTRACTOR's receipt of the Notice of Award, CONTRACTOR shall sign and have notarized the required number of counterparts of the Agreement and attached documents and return them to OWNER along with the required Bonds, insurance certificates and power of attorney authorizations.

20. Special Legal Requirements

- 20.1 OWNER's Finances. OWNER has made adequate financial arrangements for the completion of all Work required by the Contract Documents and welcomes inquiries from prospective BIDDERS on the prime contract.

21. Sales and Use Taxes

21.1 OWNER is exempt from Colorado State Sales and Use Taxes on materials and equipment to be incorporated in the Work. Said taxes shall not be included in the Contract Price. Refer to General Conditions 6.15 for additional information.

22. Retainage

22.1 Provisions concerning retainage and CONTRACTOR's rights to deposit securities in lieu of retainage are set forth in the Agreement.

23. Mistakes in Bidding Instructions

23.1 If OWNER makes a mistake in drafting the Instructions to Bidders or any other Contract Documents, OWNER reserves the right to reject any or all Bids, or to require that BIDDERS submit an alternate bid proposal with adjustments made to correct the error(s). Such errors will be set forth in an addendum. If CONTRACTOR has already been selected and has started performing work under the contract, and OWNER then discovers a mistake in the Contract Documents for which OWNER is responsible, OWNER may opt to reform the contract. If the mistake causes CONTRACTOR to receive compensation for materials not used in the Work or for labor, which would not be required for the Work, the Contract Price shall be decreased proportionally. If the mistake causes CONTRACTOR to fail to bid on work, which must be performed in order to properly complete the contract, OWNER may increase the Contract Price to equal the proportionate increase in the cost of required materials and labor caused to CONTRACTOR. In the alternative, OWNER may solicit bids for such additional work, or OWNER may reassign such additional work to another CONTRACTOR, as OWNER deems appropriate. Nothing in this provision shall apply to mistakes made by CONTRACTOR in completing the Bid Form or in performing the contract.

Bid Form

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012
OWNER: CITY OF LOUISVILLE, COLORADO

THIS BID IS SUBMITTED TO: CITY OF LOUISVILLE, COLORADO

1. The undersigned BIDDER proposes and agrees, if this Bid is accepted, to enter into an Agreement with OWNER in the form included in the Contract Documents to perform and furnish all Work as specified or indicated in the Contract Documents for the Contract Price and within the Contract Time indicated in this Bid and in accordance with the other terms and conditions of the Contract Documents.
2. BIDDER accepts all of the terms and conditions of the Invitation to Bid and Instructions to Bidders, including without limitation those dealing with the disposition of Bid Security. This Bid will remain subject to acceptance for sixty days after the day of Bid opening. BIDDER will sign and submit the Agreement with the Bonds and other documents required by the Bidding Requirements within ten days after the date of OWNER's Notice of Award.
3. In submitting this Bid, BIDDER represents, as more fully set forth in the Agreement, that:

- (a) BIDDER has examined copies of all the Bidding Documents and of the following Addenda receipt of all which is hereby acknowledged: (List Addenda by Addendum Number and Date):

Date	Number
_____	_____
_____	_____

- (b) BIDDER has familiarized itself with the nature and extent of the Contract Documents, Work, site, locality, and all local conditions and Laws and Regulations that in any manner may affect cost, progress, performance or furnishing of the Work.
 - (c) BIDDER has studied carefully all reports and drawings of subsurface conditions and drawings of physical conditions which are identified in the General Conditions as provided in paragraph 4.2, and accepts the determination set forth in paragraph 4.2 of the General Conditions. BIDDER has inspected the site and has obtained conducted and carefully studied (or assumes responsibility for obtaining and carefully studying) all examinations, investigations, explorations, tests and studies which pertain to the subsurface or physical conditions at the site or otherwise may affect the cost, progress, performance or furnishing of the Work as BIDDER considers necessary for the performance or furnishing of the Work at the Contract Price, within the Contract Time and in accordance with the other terms and conditions of the Contract Documents, including specifically the provisions of paragraph 4.2 of the General Conditions; and no additional examinations, investigations, explorations, tests, reports, or similar information or data are or will be required by BIDDER for such purpose.
 - (d) BIDDER has reviewed and checked all information and data shown or indicated on the Contract Documents with respect to existing Underground Facilities at or contiguous to the site and assumes responsibility for the accurate location of said Underground Facilities. No additional examinations, investigations, explorations, tests, reports or similar information or data in respect of said Underground Facilities are or will be required by BIDDER in order to perform and furnish the Work at the Contract Price, within the Contract Time and in

accordance with the other terms and conditions of Contract Documents, including specifically the provisions of paragraph 4.3 of the General Conditions.

- (e) BIDDER has correlated the results of all such observations, examinations, investigations, explorations, tests, reports and studies with the terms and conditions of the Contract Documents.
- (f) BIDDER has given ENGINEER written notice of all conflicts, errors, ambiguities, or discrepancies that BIDDER has discovered in the Contract Documents and the written resolution thereof by ENGINEER is acceptable to BIDDER, and the Contract Documents are generally sufficient to indicate and convey understanding of all terms and conditions for performing and furnishing the Work for which this Bid is submitted.
- (g) This Bid is genuine and not made in the interest of or on behalf of any undisclosed person, firm or corporation and is not submitted in conformity with any agreement or rules of any group, association, organization or corporation; BIDDER has not directly or indirectly induced or solicited any other Bidder to submit a false or sham Bid; BIDDER has not solicited or induced any person, firm or corporation to refrain from bidding; and BIDDER has not sought by collusion to obtain for himself any advantage over any other Bidder or over OWNER.

4. BIDDER will complete the Work in accordance with Contract Documents for the following price(s):

SCHEDULE OF UNIT PRICES

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

BASE BID

ITEM #	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	TOTAL
1	Mobilization	LS	1		
2	Construction Zone Traffic Control	LS	1		
3	Erosion Control	LS	1		
4	Unclassified Excavation (Trail Ridge Dr.)	SY	2,857		
5	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	0		
6	Unclassified Excavation (Alley)	SY	1,309		
7	Structural Excavation and Backfill (Street Resurfacing)	CY	50		
8	Structural Excavation and Backfill (Alley)	CY	72		
9	Imported Borrow	TON	0		
10	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	0		
11	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	1		
12	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	24,314		
13	Cold Milling Asphalt Pavement (1.5")	SY	1,078		
14	Cold Milling Asphalt Pavement (2")	SY	1,096		
15	Cold Mill Patch Grade SX (1.5")	SY	194		
16	Cold Mill Patch Grade SX (2")	SY	379		
17	Crack Sealant	LBS	0		
18	Slurry Seal	SY	0		
19	Hot Asphalt Patch Grade SX (4")	SY	712		
20	Hot Asphalt Patch Grade SX (6")	SY	314		
21	18" W x 3' D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	412		
22	18" W x 4' D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	6		
23	Subgrade Cement Treatment	SY	2,857		
24	Hot Asphalt Pavement Grade SX Leveler Course	TON	2,798		
25	Hot Asphalt Pavement Grade S (2.5")	SY	0		
26	Hot Asphalt Pavement Grade S (4.5")	SY	2,857		
27	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	50,882		
28	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	2,857		
29	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	1,309		
30	Skin (Surface) Patching - Grade SX	TON	14		
31	Speed Cushion	EA	1		
32	Raised Crosswalk (Speed Table)	EA	2		
33	Epoxy Pavement Markings	SF	122		
34	Thermoplastic Pavement Markings (Words and Symbols)	SF	188		
35	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	454		
36	Remove Sign and Post	EA	0		
37	Remove and Replace Sign Post	EA	1		
38	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	2		
39	Remove and Replace Sign (D3-1)	EA	0		
40	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	2		
41	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	1		
42	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	4		
43	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	0		
100	Force Account - Minor Contract Revisions	AL	1	\$ 50,000.00	\$ 50,000.00

BASE TOTAL:

THE BASIS OF AWARD SHALL BE THE TOTAL BASE BID PRICE OR THE TOTAL BASE BID PRICE PLUS ANY ALTERNATE. **ALTERNATE UNIT PRICING SHALL BE THE SAME AS THE CORRESPONDING ITEM IN THE BASE BID.** ALL ITEMS IN THE BASE BID, INCLUDING THOSE WITH ZERO (0) QUANTITY SHALL HAVE A UNIT PRICE.

SCHEDULE OF UNIT PRICES

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

ALTERNATE #1

ITEM #	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	TOTAL
1	Mobilization	LS	1		
2	Construction Zone Traffic Control	LS	1		
3	Erosion Control	LS	1		
4	Unclassified Excavation (Trail Ridge Dr.)	SY	0		
5	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	12,104		
6	Unclassified Excavation (Alley)	SY	0		
7	Structural Excavation and Backfill (Street Resurfacing)	CY	183		
8	Structural Excavation and Backfill (Alley)	CY	0		
9	Imported Borrow	TON	270		
10	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	0		
11	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	0		
12	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	0		
13	Cold Milling Asphalt Pavement (1.5")	SY	0		
14	Cold Milling Asphalt Pavement (2")	SY	0		
15	Cold Mill Patch Grade SX (1.5")	SY	0		
16	Cold Mill Patch Grade SX (2")	SY	0		
17	Crack Sealant	LBS	0		
18	Slurry Seal	SY	0		
19	Hot Asphalt Patch Grade SX (4")	SY	0		
20	Hot Asphalt Patch Grade SX (6")	SY	0		
21	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	0		
22	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	0		
23	Subgrade Cement Treatment	SY	0		
24	Hot Asphalt Pavement Grade SX Leveler Course	TON	0		
25	Hot Asphalt Pavement Grade S (2.5")	SY	12,104		
26	Hot Asphalt Pavement Grade S (4.5")	SY	0		
27	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	0		
28	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	12,104		
29	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	0		
30	Skin (Surface) Patching - Grade SX	TON	0		
31	Speed Cushion	EA	0		
32	Raised Crosswalk (Speed Table)	EA	0		
33	Epoxy Pavement Markings	SF	0		
34	Thermoplastic Pavement Markings (Words and Symbols)	SF	0		
35	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	128		
36	Remove Sign and Post	EA	0		
37	Remove and Replace Sign Post	EA	1		
38	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	0		
39	Remove and Replace Sign (D3-1)	EA	2		
40	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	0		
41	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	1		
42	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	0		
43	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	0		

BASE TOTAL:

ALTERNATE UNIT PRICING SHALL BE THE SAME AS THE CORRESPONDING ITEM IN THE BASE BID. ALL ITEMS IN THE BASE BID, INCLUDING THOSE WITH ZERO (0) QUANTITY SHALL HAVE A UNIT PRICE.

SCHEDULE OF UNIT PRICES

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

ALTERNATE #2

ITEM #	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	TOTAL
1	Mobilization	LS	1		
2	Construction Zone Traffic Control	LS	1		
3	Erosion Control	LS	1		
4	Unclassified Excavation (Trail Ridge Dr.)	SY	0		
5	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	0		
6	Unclassified Excavation (Alley)	SY	0		
7	Structural Excavation and Backfill (Street Resurfacing)	CY	0		
8	Structural Excavation and Backfill (Alley)	CY	0		
9	Imported Borrow	TON	0		
10	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	2		
11	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	0		
12	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	13,195		
13	Cold Milling Asphalt Pavement (1.5")	SY	0		
14	Cold Milling Asphalt Pavement (2")	SY	0		
15	Cold Mill Patch Grade SX (1.5")	SY	0		
16	Cold Mill Patch Grade SX (2")	SY	0		
17	Crack Sealant	LBS	0		
18	Slurry Seal	SY	0		
19	Hot Asphalt Patch Grade SX (4")	SY	0		
20	Hot Asphalt Patch Grade SX (6")	SY	0		
21	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	0		
22	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	0		
23	Subgrade Cement Treatment	SY	0		
24	Hot Asphalt Pavement Grade SX Leveler Course	TON	1,140		
25	Hot Asphalt Pavement Grade S (2.5")	SY	296		
26	Hot Asphalt Pavement Grade S (4.5")	SY	0		
27	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	26,092		
28	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	0		
29	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	0		
30	Skin (Surface) Patching - Grade SX	TON	0		
31	Speed Cushion	EA	0		
32	Raised Crosswalk (Speed Table)	EA	2		
33	Epoxy Pavement Markings	SF	130		
34	Thermoplastic Pavement Markings (Words and Symbols)	SF	0		
35	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	468		
36	Remove Sign and Post	EA	7		
37	Remove and Replace Sign Post	EA	1		
38	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	3		
39	Remove and Replace Sign (D3-1)	EA	0		
40	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	0		
41	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	0		
42	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	4		
43	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	4		

BASE TOTAL:

ALTERNATE UNIT PRICING SHALL BE THE SAME AS THE CORRESPONDING ITEM IN THE BASE BID. ALL ITEMS IN THE BASE BID, INCLUDING THOSE WITH ZERO (0) QUANTITY SHALL HAVE A UNIT PRICE.

SCHEDULE OF UNIT PRICES

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

ALTERNATE #3

ITEM #	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	TOTAL
1	Mobilization	LS	1		
2	Construction Zone Traffic Control	LS	1		
3	Erosion Control	LS	1		
4	Unclassified Excavation (Trail Ridge Dr.)	SY	0		
5	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	0		
6	Unclassified Excavation (Alley)	SY	0		
7	Structural Excavation and Backfill (Street Resurfacing)	CY	0		
8	Structural Excavation and Backfill (Alley)	CY	0		
9	Imported Borrow	TON	0		
10	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	0		
11	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	0		
12	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	12,712		
13	Cold Milling Asphalt Pavement (1.5")	SY	0		
14	Cold Milling Asphalt Pavement (2")	SY	0		
15	Cold Mill Patch Grade SX (1.5")	SY	509		
16	Cold Mill Patch Grade SX (2")	SY	34		
17	Crack Sealant	LBS	1,880		
18	Slurry Seal	SY	10,441		
19	Hot Asphalt Patch Grade SX (4")	SY	0		
20	Hot Asphalt Patch Grade SX (6")	SY	0		
21	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	0		
22	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	354		
23	Subgrade Cement Treatment	SY	0		
24	Hot Asphalt Pavement Grade SX Leveler Course	TON	1,485		
25	Hot Asphalt Pavement Grade S (2.5")	SY	0		
26	Hot Asphalt Pavement Grade S (4.5")	SY	0		
27	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	26,984		
28	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	0		
29	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	0		
30	Skin (Surface) Patching - Grade SX	TON	0		
31	Speed Cushion	EA	0		
32	Raised Crosswalk (Speed Table)	EA	0		
33	Epoxy Pavement Markings	SF	116		
34	Thermoplastic Pavement Markings (Words and Symbols)	SF	16		
35	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	316		
36	Remove Sign and Post	EA	0		
37	Remove and Replace Sign Post	EA	0		
38	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	3		
39	Remove and Replace Sign (D3-1)	EA	0		
40	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	0		
41	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	0		
42	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	0		
43	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	0		

BASE TOTAL:

ALTERNATE UNIT PRICING SHALL BE THE SAME AS THE CORRESPONDING ITEM IN THE BASE BID. ALL ITEMS IN THE BASE BID, INCLUDING THOSE WITH ZERO (0) QUANTITY SHALL HAVE A UNIT PRICE.

Prices have been computed in accordance with paragraph 11.9.2 of the General Conditions.

BIDDER acknowledges that quantities are not guaranteed, and final payment will be based on actual quantities determined as provided in the Contract Documents.

5. BIDDER agrees that the Work;

Will be substantially complete and completed and ready for final payment in accordance with paragraph 14.13 of the General Conditions on or before the dates or within the number of Contract Days indicated in the Agreement.

BIDDER accepts the provisions of the Agreement as to liquidated damages in the event of failure to complete the Work within the times specified in the Agreement.

6. The following documents are attached to and made a condition of this Bid:

- (a) Required Bid Security;
- (b) A list of Subcontractors and other persons and organizations proposed to perform the Work are required to be identified on the Schedule of Subcontractors and submitted in this Bid;
- (c) Anti-Collusion Affidavit; and
- (d) If BIDDER is a partnership, a list of all partners, their addresses, and their interest and role in the partnership business.

7. Communications concerning this Bid shall be addressed to:
The address of BIDDER indicated below.

8. Terms used in this Bid, which are defined in the General Conditions of the Construction Contract included as part of the Contract Documents, have the meanings assigned to them in the General Conditions.

SUBMITTED on _____, 2025.

If BIDDER is:

An Individual

By _____
(Individual's Name)

(SEAL)

doing business as _____

Business address: _____

Phone No.: _____

A Partnership

By _____
(Firm Name)

(SEAL)

(General Partner)

Business address: _____

Phone No.: _____

A Corporation

By _____
(Corporation Name)

(State of incorporation)

By _____
(Name of person authorized to sign)

(Title)

(CORPORATE SEAL)

Attest _____
(Secretary)

Business address: _____

Phone No.: _____

Date of Qualification to do business: _____

A Joint Venture

By _____
(Name)

(Address)

By _____
(Name)

(Address)

Phone Number and Address for receipt of official communications

(Each joint venturer must sign. The manner of signing for each individual, partnership, and corporation that is a party to the joint venture should be in the manner indicated above.)

Bid Bond

BIDDER (Name and Address):

SURETY (Name and Address of Principal Place of Business):

OWNER (Name and Address):

BID:

BID DUE DATE: _____

PROJECT (Brief Description Including Location):

BOND:

BOND NUMBER: _____

DATE: (Not later than Bid Due Date): _____

PENAL SUM: _____

IN WITNESS WHEREOF, Surety and Bidder, intending to be legally bound hereby, subject to the terms printed on the reverse side hereof, do each cause this Bid Bond to be duly executed on its behalf by its authorized officer, agent, or representative.

BIDDER

_____(Seal)
Bidder's Name and Corporate Seal

By: _____
Signature and Title

Attest: _____
Signature and Title

SURETY

_____(Seal)
Surety's Name and Corporate Seal

By: _____
Signature and Title
(Attach Power of Attorney)

Attest: _____
Signature and Title

Note: (1) Above addresses are to be used for giving requiring notice.
(2) Any singular reference to Bidder, Surety, Owner or other party shall be considered plural where applicable.

1. Bidder and Surety, jointly and severally, bind themselves, their heirs, executors, administrators, successors and assigns to pay to Owner upon default of Bidder the penal sum set forth on the face of this Bond. Default of Bidder shall occur upon the failure of Bidder to deliver within the time required by the Bidding Documents the properly executed Agreement required by the Bidding Documents and any performance and payment bonds required by the Bidding Documents and Contract Documents.
3. This obligation shall be null and void if:
 - 3.1. Owner accepts Bidder's Bid and Bidder delivers within the time required by the Bidding Documents (or any extension thereof agreed to in writing by Owner) the executed Agreement required by the Bidding Documents and any performance and payment bonds required by the Bidding Documents and Contract Documents, or
 - 3.2. All bids are rejected by Owner, or
 - 3.3. Owner fails to issue a notice of award to Bidder within the time specified in the Bidding Documents (or any extension thereof agreed to in writing by Bidder and, if applicable, consented to by Surety when required by paragraph 5 hereof).
4. Payment under this Bond will be due and payable upon default of Bidder and within thirty (30) calendar days after receipt by Bidder and Surety of written notice of default from Owner, which notice will be given with reasonable promptness, identifying this Bond and the Project and including a statement of the amount due.
5. Surety waives notice of and any and all defenses based on or arising out of any time extension to issue notice of award agreed to in writing by Owner and Bidder, provided that the time for issuing notice of award including extensions shall not in the aggregate exceed 120 days from Bid Due Date without Surety's written consent.
6. No suit or action shall be commenced under this Bond prior to thirty (30) calendar days after the notice of default required in paragraph 4 above is received by Bidder and Surety, and in no case later than one year after Bid Due Date.
7. Any suit or action under this Bond shall be commenced only in a court of competent jurisdiction located in the state in which the Project is located.
8. Notice required hereunder shall be in writing and sent to Bidder and Surety at their respective addresses shown on the face of this Bond. Such notices may be sent by personal delivery, commercial courier or by United States Registered or Certified Mail, return receipt requested, postage pre-paid, and shall be deemed to be effective upon receipt by the party concerned.
9. Surety shall cause to be attached to this Bond a current and effective Power of Attorney evidencing the authority of the officer, agent or representative who executed this Bond on behalf of Surety to execute, seal and deliver such Bond and bind the Surety thereby.
10. This Bond is intended to conform to all applicable statutory requirements. Any applicable requirements of any applicable statute that has been omitted from this Bond shall be deemed to be included herein as if set forth at length. If any provision of the Bond conflicts with any applicable provision of any applicable statute, then the provision of said statute shall govern and the remainder of this Bond that is not in conflict therewith shall continue in full force and effect.
11. The term "bid" as used herein includes a bid, offer or proposal as applicable.

Schedule of Subcontractors

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012
OWNER: CITY OF LOUISVILLE, COLORADO

This Bid is based on subcontracting certain portions of the work to subcontractors as listed below.

Name: _____ Telephone No. _____
Address: _____
City: _____ State: _____ Zip Code: _____
Services/equipment to be provided: _____

Name: _____ Telephone No. _____
Address: _____
City: _____ State: _____ Zip Code: _____
Services/equipment to be provided: _____

Name: _____ Telephone No. _____
Address: _____
City: _____ State: _____ Zip Code: _____
Services/equipment to be provided: _____

Name: _____ Telephone No. _____
Address: _____
City: _____ State: _____ Zip Code: _____
Services/equipment to be provided: _____

Name: _____ Telephone No. _____
Address: _____
City: _____ State: _____ Zip Code: _____
Services/equipment to be provided: _____

Name: _____ Telephone No. _____
Address: _____
City: _____ State: _____ Zip Code: _____
Services/equipment to be provided: _____

Anti-Collusion Affidavit

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012
OWNER: CITY OF LOUISVILLE, COLORADO

I hereby attest that I am the person responsible within my firm for the final decision as to the price(s) and amount of this Bid or, if not, that I have written authorization, enclosed herewith, from that person to make the statements set out below on his or her behalf of my firm.

I further attest that:

1. The price(s) and amount of this bid have been arrived at independently, without consultation, communication, or agreement for the purpose or with the effect of restricting competition with any other firm or person who is a BIDDER or potential prime BIDDER.
- 2A. Neither the price(s) nor the amount of this Bid have been disclosed to any other firm or person who is a BIDDER or potential prime BIDDER on this project and will not be so disclosed prior to bid opening.
- 2B. Neither the prices nor the amount of the Bid of any other firm or person who is a BIDDER or potential prime BIDDER on this project have been disclosed to me or my firm.
- 3A. No attempt has been made to solicit, cause, or induce any firm or person who is BIDDER or potential prime BIDDER to refrain from bidding on this project, or to submit a Bid higher than the Bid of this firm, or any intentionally high or noncompetitive Bid or other form of complementary Bid.
- 3B. No agreement has been promised or solicited for any other firm or person who is a BIDDER or potential prime BIDDER on this project to submit an intentionally high, noncompetitive, or other form of complementary bid on this project.
4. The Bid of my firm is made in good faith and not pursuant to any consultation, communication, agreement, or discussion with, or inducement or solicitation by or from any firm or person to submit any intentionally high, noncompetitive, or other form of complementary bid.
5. My firm has not offered or entered into a subcontract or agreement regarding the purchase or sale of materials or services from any firm or person, or offered, promised, or paid cash or anything of value to any firm or person, whether in connection with this or any other project, in consideration for an agreement or promise by any firm or person to refrain from bidding or to submit any intentionally high, noncompetitive, or other form of complementary bid or agreeing or promising to do so on this project.
6. My firm has not accepted or been promised any subcontract or agreement regarding the sale of materials or services to any firm or person, and has not been promised or paid cash or anything of value by any firm or person, whether in connection with this or any other project, in consideration for my firm's submitting any intentionally high, noncompetitive or other form of complementary bid, or agreeing or promising to do so, on this project.
7. I have made a diligent inquiry of all members, officers, employees, and agents of my firm with responsibilities relating to the preparation, approval or submission of my firm's bid on this project and have been advised by each of them that he or she has not participated in any communication, consultation, discussion, agreement, collusion, or other conduct inconsistent with any of the statements and representations made in this affidavit.
8. I understand and my firm understands that any misstatement in this affidavit is and shall be treated as a fraudulent concealment from the OWNER of the true facts relating to submission of bids for this contract.

I DECLARE UNDER PENALTY OF PERJURY IN THE SECOND DEGREE, AND ANY OTHER APPLICABLE STATE OR FEDERAL LAWS THAT THE STATEMENTS MADE ON THIS DOCUMENT ARE TRUE AND COMPLETE TO THE BEST OF MY KNOWLEDGE.

CONTRACTOR'S FIRM OR COMPANY NAME		SECOND CONTRACTOR'S FIRM OR COMPANY NAME (IF JOINT VENTURE)	
BY:	_____	BY:	_____
TITLE:	_____	TITLE:	_____
DATE:	_____	DATE:	_____

SWORN BEFORE ME THIS _____ DAY OF, _____, 2025

NOTARY PUBLIC: _____ MY COMMISSION EXPIRES: _____

Certification of EEO Compliance

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012
OWNER: CITY OF LOUISVILLE, COLORADO

Instructions: BIDDERS and Subcontractors must complete and submit this form with the Bid Form. This is required by the Equal Employment Opportunity Regulations 41 CFR 1.7 (b) (1).

1. ___ Yes ___ No I have developed and have on file at each establishment an affirmative action program as required by 41 CFR Chapter 60, Part 60-2.
2. ___ Yes ___ No I have participated in a previous contract/subcontract subject to the equal opportunity clause.
3. ___ Yes ___ No I have filed with the Joint Reporting Committee, the Director, or the Equal Employment Opportunity Commission all reports due under the applicable filing requirements.

I declare under penalty of perjury in the second degree and any other applicable state or federal laws that the statements made in this document are true and complete to the best of my knowledge.

CONTRACTOR

___ BIDDER ___ PROPOSED SUBCONTRACTOR

BY: _____

TITLE: _____

DATE: _____

Agreement

THIS AGREEMENT is made and entered into this ___ day of _____ in the year 2025 by and between:

CITY OF LOUISVILLE, COLORADO
(hereinafter called OWNER)

and

(hereinafter called CONTRACTOR)

OWNER and CONTRACTOR, in consideration of the mutual covenants hereinafter set forth, agree as follows.

Article 1. Work

CONTRACTOR shall complete all Work as specified or indicated in the Contract Documents. The Work is generally described as follows:

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012

Article 2. Contract Times

- 2.1. The CONTRACTOR shall substantially complete all work within ___ **Contract Days** from the date when the Contract Time commences to run as identified in the Notice to Proceed. The Work shall be completed and ready for final payment in accordance with paragraph 14.13 of the General Conditions.
- 2.2. **LIQUIDATED DAMAGES.** OWNER and CONTRACTOR agree and recognize that time is of the essence in this contract and that OWNER will suffer financial loss if the Work is not substantially complete by the date specified in paragraph 2.1 above, plus any extensions thereof allowed in accordance with the Article 12 of the General Conditions. OWNER and CONTRACTOR also agree that such damages are uncertain in amount and difficult to measure accurately. Accordingly, OWNER and CONTRACTOR agree that as liquidated damages, and not as a penalty, for delay in performance CONTRACTOR shall pay OWNER **ONE THOUSAND DOLLARS (\$1,000)** for each and every **Contract Day** and portion thereof that expires after the time specified above for substantial completion of the Work until the same is finally complete and ready for final payment. The liquidated damages herein specified shall only apply to CONTRACTOR's delay in performance, and shall not include litigation or attorneys' fees incurred by OWNER, or other incidental or consequential damages suffered by OWNER due to CONTRACTOR's performance. If OWNER charges liquidated damages to CONTRACTOR, this shall not preclude OWNER from commencing an action against CONTRACTOR for other actual harm resulting from CONTRACTOR's performance, which is not due to CONTRACTOR's delay in performance.

Article 3. Contract Price

- 3.1. OWNER shall pay in current funds, and the CONTRACTOR agrees to accept in full payment for performance of the Work, subject to additions and deductions from extra and/or omitted work and determinations of actual quantities as provided in the Contract Documents, the Contract Price of _____ dollars \$ _____ set forth in the Bid Form of the CONTRACTOR dated _____.

As provided in paragraph 11.9 of the General Conditions estimated quantities are not guaranteed, and determinations of actual quantities and classification are to be made by ENGINEER as provided in paragraph 9.10 of the General Conditions. Unit prices have been computed as provided in paragraph 11.9 of the General Conditions.

Article 4. Payment Procedures

CONTRACTOR shall submit Applications for Payment in accordance with Article 14 of the General Conditions. Applications for Payment will be processed by OWNER as provided in the General Conditions.

- 4.1 PROGRESS PAYMENTS. OWNER shall make progress payments on the basis of CONTRACTOR's Applications for Payment as recommended by ENGINEER, on or about the third Wednesday of each month during construction as provided below. All progress payments will be on the basis of the progress of the Unit Price Work based on the number of units completed as provided in the General Conditions.

- 4.1.1.1 Prior to final completion and acceptance, progress payments will be made in the amount equal to 95 percent of the calculated value of completed Work, and/or 95 percent of materials and equipment not incorporated in the Work (but delivered, suitably stored and accompanied by documentation satisfactory to OWNER as provided in 14.2 of the General Conditions), but in each case, less the aggregate of payments previously made and such less amounts as ENGINEER shall determine, or OWNER may withhold, in accordance with paragraph 14.7 of the General Conditions.

If OWNER finds that satisfactory progress is being made in any phase of the Work, it may, in its discretion and upon written request by CONTRACTOR, authorize final payment from the withheld percentage to CONTRACTOR or subcontractors who have completed their work in a manner finally acceptable to OWNER. Before any such payment may be made, OWNER must, in an exercise of its discretion, determine that satisfactory and substantial reasons exist for the payment and there must be provided to OWNER written approval from any surety furnishing bonds for the Work.

Nothing contained in this provision shall preclude OWNER and CONTRACTOR from making other arrangements consistent with C.R.S. 24-91-105 prior to contract award.

- 4.2 FINAL PAYMENT. Upon final completion and acceptance of the Work in accordance with paragraph 14.13 of the General Conditions, OWNER shall pay the remainder of the Contract Price as provided in said paragraph 14.13 of the General Conditions.

Article 5. Contractor's Representations

In order to induce OWNER to enter into this Agreement CONTRACTOR makes the following representations:

- 5.1. CONTRACTOR has examined and carefully studied the Contract Documents, (including the Addenda listed in paragraph 6.10) and the other related data identified in the Bidding Documents including "technical".
- 5.2. CONTRACTOR has inspected the site and become familiar with and is satisfied as to the general, local and site conditions that may affect cost, progress, performance or furnishing of the Work.
- 5.3. CONTRACTOR is familiar with and is satisfied as to all federal, state and local Laws and Regulations that may affect cost, progress and furnishing of the Work.
- 5.4. CONTRACTOR has carefully studied all reports of exploration and tests of subsurface conditions at or contiguous to the site and all drawings of physical conditions relating to surface or subsurface structures at or contiguous to the site (Except Underground facilities) which have been identified in the General Conditions as provided in paragraph 4.2.1 of the General Conditions. CONTRACTOR accepts the determination set forth in paragraph 4.2 of the General Conditions. CONTRACTOR acknowledges that such reports and drawings are not Contract Documents and may not be complete for CONTRACTOR's purposes. CONTRACTOR acknowledges that OWNER and ENGINEER do not assume responsibility for the accuracy or completeness of information and data shown or indicated in the Contract Documents with respect to such reports, drawings or to Underground Facilities at or contiguous to the site. CONTRACTOR has conducted, obtained and carefully studied (or assume responsibility for having done so) all necessary examinations, investigations, explorations, tests, studies, and data concerning conditions (surface, subsurface and Underground Facilities) at or contiguous to the site or otherwise which may affect cost, progress, performance or furnishing of the Work or which relate to any aspect of the means, methods, techniques, sequences and procedures of construction to be employed by CONTRACTOR and safety precautions and programs incident thereto. CONTRACTOR does not consider that any additional examinations, investigations, explorations, tests, studies or data are necessary for the performance and furnishing of the Work at the Contract Price, within the Contract Times and in accordance with the other terms and conditions of the Contract Documents.
- 5.5. CONTRACTOR has reviewed and checked all information and data shown or indicated on the Contract Documents with respect to existing Underground Facilities at or contiguous to the site and assumes responsibility for the accurate location of said Underground Facilities. No additional examinations, investigations, explorations, tests, reports, studies or similar information or data in respect of said Underground Facilities are or will be required by CONTRACTOR in order to perform and furnish the Work at the Contract Price, within the Contract Time and in accordance with the other terms and conditions of the Contract Documents, including specifically the provisions of paragraph 4.3 of the General Conditions.
- 5.6. CONTRACTOR is aware of the general nature of work to be performed by OWNER and others at the site that relates to the Work as indicated in the Contract Documents.
- 5.7. CONTRACTOR has correlated the information known to CONTRACTOR, information and observations obtained from visits to the site, reports and drawings identified in the Contract Documents and all additional examinations, investigations, explorations, tests studies and data with the Contract Documents.
- 5.8. CONTRACTOR has given ENGINEER written notice of all conflicts, errors, ambiguities, or discrepancies that CONTRACTOR has discovered in the Contract Documents and the written resolution thereof by

ENGINEER is acceptable to CONTRACTOR, and the Contract Documents are generally sufficient to indicate and convey understanding of all terms and conditions for performance and furnishing the Work.

Article 6. Contract Documents

The Contract Documents, which constitute the entire agreement between OWNER and CONTRACTOR concerning the Work, are all written documents, which define the Work and the obligations of CONTRACTOR in performing the Work and OWNER in providing compensation for the Work. The Contract Documents include the following:

- 6.1. Invitation to Bid.
- 6.2. Instruction to Bidders.
- 6.3. Bid Form.
- 6.4. This Agreement.
- 6.5. General Conditions.
- 6.6. Supplementary Conditions.
- 6.7. General Requirements.
- 6.8. Technical Specifications.
- 6.9. Drawings with each sheet bearing the title: **2025 Street Resurfacing Project.**
- 6.10. Change Orders, Addenda and other documents which may be required or specified including:
 - 6.10.1. Addenda No. __ to __ exclusive
 - 6.10.2. Documentation submitted by CONTRACTOR prior to Notice of Award
 - 6.10.3. Schedule of Subcontractors
 - 6.10.4. Anti-Collusion Affidavit
 - 6.10.5. Certification of EEO Compliance
 - 6.10.6. Notice of Award
 - 6.10.7. Performance Bond
 - 6.10.8. Labor and Material Payment Bond
 - 6.10.9. Certificates of Insurance
 - 6.10.10. Notice to Proceed
 - 6.10.11. Contractor's Proposal Request
 - 6.10.12. Contractor's Overtime Request
 - 6.10.13. Field Order
 - 6.10.14. Work Change Directive
 - 6.10.15. Change Order
 - 6.10.16. Application for Payment
 - 6.10.17. Certificate of Substantial Completion
 - 6.10.18. Claim Release
 - 6.10.19. Final Inspection Report
 - 6.10.20. Certificate of Final Completion
 - 6.10.21. Guarantee Period Inspection Report
- 6.11. The following which may be delivered or issued after the Effective Date of the Agreement and are attached hereto: All Written Amendments and other documents amending, modifying, or supplementing the Contract Documents pursuant to paragraphs 3.5 and 3.6 of the General Conditions.
- 6.12. In the event of conflict between the above documents, the prevailing document shall be as follows:
 1. Permits from other agencies as may be required.
 2. Special Provisions and Detail Drawings.
 3. Technical Specifications and Drawings. Drawings and Technical Specifications are intended to be complementary. Anything shown or called for in one and omitted in another is binding as if called for or shown by both.

4. Supplementary Conditions.
5. General Conditions.
6. City of Louisville Design and Construction Standards.
7. Reference Specifications.

In case of conflict between prevailing references above, the one having the more stringent requirements shall govern.

There are no Contract Documents other than those listed above in this Article 6. The Contract Documents may only be amended, modified, or supplemented as provided in paragraphs 3.5 and 3.6 of the General Conditions.

Article 7. Miscellaneous

- 7.1. Terms used in this Agreement, which are defined in Article 1 of the General Conditions, shall have the meanings indicated in the General Conditions.
- 7.2. No assignment by a party hereto of any rights under or interests in the Contract Documents will be binding on another party hereto without the written consent of the party sought to be bound; and specifically but without limitation, moneys that may become due and moneys that are due may not be assigned without such consent (except to the extent that the effect of this restriction may be limited by law), and unless specifically stated to the contrary in any written consent to an assignment no assignment will release or discharge that assignor from any duty or responsibility under the Contract Documents.
- 7.3. OWNER and CONTRACTOR each binds itself, its partners, successors, assigns and legal representatives to the other party hereto, its partners, successors, assigns and legal representatives in respect to all covenants, agreements and obligations contained in the Contract Documents.
- 7.4. OWNER and CONTRACTOR consent to the use of electronic signatures on the Contract Documents. This Agreement, and any other Contract Documents requiring a signature hereunder, may be signed electronically by the Parties in the manner specified under the Uniform Electronic Transactions Act, Title 24, Article 71.3, Part 1, C.R.S.; provided that, electronic records of, and electronic signatures on, any required bonds, including required Performance, Labor and Material Payment, and Warranty Bonds, must be acceptable to CONTRACTOR's selected surety. The Parties agree not to deny the legal effect or enforceability of a Contract Document solely because the document is in electronic form or because an electronic record was used in its formation. The Parties agree not to object to the admissibility of a Contract Document in the form of an electronic record, or a paper copy of an electronic document, or a paper copy or electronic record of a document bearing an electronic signature, on the ground that it is an electronic record or electronic signature or that it is not in its original form or is not an original.

Article 8. Other Provisions

IN WITNESS WHEREOF, OWNER, and CONTRACTOR have signed this Agreement in duplicate. One counterpart each has been delivered to OWNER and CONTRACTOR. All portions of the Contract Documents have been signed, initialed, or identified by OWNER and CONTRACTOR.

This Agreement will be effective on _____, 2025.

**OWNER: CITY OF LOUISVILLE,
COLORADO**

CONTRACTOR: _____

By: _____
Christopher M. Leh, Mayor

By: _____

(CORPORATE SEAL)

(CORPORATE SEAL)

Attest: _____
Meredyth Muth, City Clerk

Attest: _____

Address for giving notices:

Address for giving notices:

749 Main Street
Louisville, Colorado
80027

Attention: City Engineer

Performance Bond

_____, as Principal, hereinafter called the Contractor, and

_____, as Surety, with general offices in

a Corporation organized under the laws of the State of _____, and authorized to transact business in the State of Colorado, are hereby bound unto the City of Louisville, Colorado, as Obligee, hereinafter called the City, in the penal sum of _____ (\$ _____) in the United States currency, for the payment of which sum the Contractor and Surety bind themselves, their heirs, executors, administrators, successors, and assigns, jointly and severally.

WHEREAS, the Contractor has entered into a written contract with the City dated _____, 2025, for _____ in accordance with plans and specifications contained in the Contract, a copy of which Contract is attached hereto and made a part hereof and is hereinafter referred to as the Contract;

NOW, THEREFORE, the conditions of this performance bond are such that, if the Contractor shall satisfactorily perform the Contract, then this bond shall be null and void; otherwise, the Surety shall promptly remedy the default, or shall promptly 1) Complete the Contract in accordance with its terms and conditions, or 2) Obtain a Bid or Bids for completing the contract in accordance with its terms and conditions, and upon determination by Surety of the lowest responsible bidder, or if the City elects, upon determination by the City and the Surety jointly of the lowest responsible bidder, arrange for a Contract between such Bidder and the City, and make available as work progresses (even though there should be a default or a succession of defaults under the Contract or Contracts of completion arranged under this paragraph) sufficient funds to pay the costs of completion plus liquidated damages additional costs pursuant to Section 12.2 of the General Conditions of the Contract less the balance of the contract price, but not exceeding the amount set forth in the first paragraph hereof. The term "balance of the contract price", as used in this paragraph, shall mean the total amount payable by the City to the Contractor under the Contract and any amendments thereto, less the amount paid by the City to Contractor.

In addition, if the Contractor or a subcontractor shall fail to duly pay for any labor, materials, team hire, sustenance, provisions, provender, or other supplies used or consumed by such Contractor or subcontractor in performance of the Contract, or shall fail to duly pay any person who supplies rental machinery, tools, or equipment, all amounts due as the result of the use of such machinery, tools or equipment in the prosecution of the Work, then the Surety shall pay the same in the amount not exceeding the sum specified in the bond together with interest at a rate of eight percent per annum.

In addition to the other conditions hereof, this bond shall include all provisions set forth in Section 38-26-106, C.R.S.

THE UNDERSIGNED SURETY for value received hereby agrees that no extension of time, change in, addition to, or other modification of the terms of the Contract of Work to be performed thereunder or the specifications of the Contract Documents shall in any way affect its obligation on this bond and the Surety does hereby waive notice of any such extension of time, change, addition, or modifications.

SIGNED AND SEALED this day of _____ , 20____.

(Contractor)

By: _____
(President)

(Attest)

(Surety Company)

Address: _____

By: _____
(Attorney-in-fact)

Labor and Material Payment Bond

BOND NUMBER:

KNOW ALL MEN BY THESE PRESENCES: that

(Firm) _____
(Address) _____
(an Individual), (a Partnership), (a Corporation), hereinafter referred to as "the Principal", and

(Firm) _____
(Address) _____
hereinafter referred to as "the Surety", are held and firmly bound unto the
CITY OF LOUISVILLE, 749 MAIN STREET, LOUISVILLE, COLORADO a Municipal Corporation, hereinafter
referred to as "the Owner", in the penal sum of

_____ Dollars
(\$ _____) in lawful money of the United States, for the payment of which sum well and
truly to be made, we bind ourselves, successors and assigns, jointly and severally, firmly by these presents.

THE CONDITIONS OF THIS OBLIGATION are such that whereas the Principal entered into a certain Agreement
with the Owner, dated the _____ day of _____, 2025, a copy of which is hereto attached
and made a part hereof for the performance of

NOW, THEREFORE, if the Principal shall make payment to all persons, firms, subcontractors, and corporations
furnishing materials for or performing labor in the prosecution of the Work provided for in such Agreement,
and any authorized extension or modification thereof, including all amounts due for materials, lubricants,
repairs on machinery, equipment and tools, consumed, rented or used in connection with the construction of
such work, and all insurance premiums on said Work, and for all labor, performed in such Work whether by
Subcontractor or otherwise, then this obligation shall be void; otherwise to remain in full force and effect.

PROVIDED, FURTHER, that the said Surety, for value received, hereby stipulates and agrees that no change,
extension of time, alteration or addition to the terms of the Agreement or to the Work to be performed
thereunder or the specifications accompanying the same shall in any way affect its obligation on this Bond;
and it does hereby waive notice of any such change, extension of time, alteration or addition to the terms of
the Agreement or to the Work or to the Specifications.

PROVIDED, FURTHER, that no final settlement between the Owner and the Contractor shall abridge the right
of any beneficiary hereunder, whose claim may be unsatisfied.
In addition to the other conditions hereof, this bond shall include all provisions set forth in Section 38-26-105,
C.R.S.

IN WITNESS WHEREOF, this instrument is executed in (3) counterparts, each one of which shall be deemed an original, this _____ day of _____, 20____.

IN THE PRESENCE OF:

PRINCIPAL

PRINCIPAL:

BY: _____

(Title)

(Corporate Seal)

Address:

IN THE PRESENCE OF:

OTHER PARTNERS:

By: _____

By: _____

IN THE PRESENCE OF:

SURETY:

By: _____
(Attorney-in fact)

Address:

(Surety Seal)

NOTE: Date of Bond must not be prior to date of Agreement.
If Contractor is a Partnership, all partners must execute Bond.

IMPORTANT: Surety Company must be authorized to transact business in the state of Colorado and be acceptable to the Owner.

Notice of Award

DATED: _____

TO: _____

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012
OWNER: CITY OF LOUISVILLE, COLORADO

Please be advised that on _____, the City of Louisville, Colorado City Council awarded the 2025 Street Resurfacing Project to your company in the amount of \$_____ per your low unit price bid. In accordance with the Contract Documents, you are required to execute two copies of the Agreement and return both copies with the required bonds and certificates of insurance within **10 days** of the date of this Notice of Award by _____.

Failure to comply with these conditions within the time specified will entitle OWNER to consider your bid abandoned, to annul this Notice of Award and to declare your Bid Security forfeited.

CITY OF LOUISVILLE, COLORADO

ACCEPTANCE OF NOTICE

By: _____
Geoff Nettleton, P.E.

By: _____

Title: Civil Engineer III _____

Title: _____

Notice to Proceed

DATED: _____

TO: _____

PROJECT: 2025 STREET RESURFACING PROJECT

PROJECT NUMBER: 301312-660012

OWNER: CITY OF LOUISVILLE, COLORADO

You are hereby notified that the Contract Time under the above Contract will commence to run on _____. On that date, you are to begin performing the Work in accordance with the Contract Documents and you are to complete the Work within _____ **Contract Days** thereafter. The date of substantial completion of all Work is therefore _____.

CITY OF LOUISVILLE, COLORADO

By: _____

Geoff Nettleton, P.E.

Title: Civil Engineer III

ACKNOWLEDGEMENT

Receipt of the above Notice to Proceed is hereby acknowledged.

CONTRACTOR: _____

By: _____

Title: _____

Date: _____

CHANGE ORDER NO. _____

OWNER: CITY OF LOUISVILLE, COLORADO

Agreement

Field Order Form

FIELD ORDER NO. _____

TO: _____

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012
OWNER: CITY OF LOUISVILLE, COLORADO

DATE ISSUED: _____

You are hereby directed and instructed to execute promptly minor variations in the Work by this Field Order as follows:

Attachments:

This form shall be used to authorize minor variations in the Work from the requirements of the Contract Documents, which do not include an adjustment in the Contract Price or the Contract Times.

CITY OF LOUISVILLE

BY: _____

TITLE: _____

DATE: _____

ACCEPTED BY CONTRACTOR

BY: _____

TITLE: _____

DATE: _____

Work Change Directive Instructions

A. GENERAL INFORMATION

This document was developed for use in situations involving changes in the Work that, if not processed expeditiously, might delay the Project. These changes are often initiated in the field and may affect the Contract Price or the Contract Times. This is not a Change Order, but only a directive to proceed with Work that may be included in a subsequent Change Order.

For supplemental instructions and minor changes not involving a possible change in the Contract Price or the contract Times a Field Order may be used.

B. COMPLETING THE WORK CHANGE DIRECTIVE FORM

Engineer initiates the form, including a description of the items involved and attachments.

Based on conversations between Engineer and Contractor, Engineer completes the following:

METHOD OF DETERMINING CHANGE, IF ANY, IN CONTRACT PRICE. Mark the method to be used in determining the final cost of Work involved and the estimated net effect on the Contract Price. If the change involves an increase in the Contract Price and the estimated amount is approached before the additional or changed Work is completed, another Work Change Directive must be issued to change the estimated price or Contractor may stop the changed Work when the estimated price is reached. If the Work Change Directive is not likely to change the Contract Price, the space for estimated increase (decrease) should be marked "Not Applicable".

METHOD OF DETERMINING CHANGE, IF ANY, IN CONTRACT TIMES: Mark the method to be used in determining the change in Contract Times and the estimated increase or decrease in Contract Times. If the change involves an increase in the Contract Times and the estimated times are approached before the additional or changed Work is completed, another Work Change Directive must be issued to change the times or Contractor may stop the changed Work when the estimated times are reached. If the Work Change Directive is not likely to change the Contract Times, the space for estimated increase (decrease) should be marked "Not Applicable".

Once authorized by Engineer a copy will be sent to Contractor. Price and Times may only be changed by Change Order signed by Owner and Contractor.

Once the Work covered by this directive is completed or final cost and times are determined, Contractor should submit documentation for inclusion in a Change Order.

THIS IS A DIRECTIVE TO PROCEED WITH A CHANGE THAT MAY AFFECT THE CONTRACT PRICE OR THE CONTRACT TIMES. A CHANGE ORDER, IF ANY, SHOULD BE CONSIDERED PROMPTLY.

Work Change Directive Form

WORK CHANGE DIRECTIVE NO. _____

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012
OWNER: CITY OF LOUISVILLE, COLORADO

DATE ISSUED: _____

EFFECTIVE DATE: _____

You are directed to proceed promptly with the following change(s):

Description:

Purpose of Work Change Directive:

Attachments (List documents supporting change):

If a claim is made that the above change(s) have affected Contract Price of Contract Times any claim for a Change Order based thereon will involve one or more of the following methods of determining the effect of the change(s).

Method of determining change in
Contract Price:

____ Unit Prices
____ Lump Sum
____ Other _____

Method of determining change in
Contract Times:

____ Contractor's Records
____ Engineer's Records
____ Other _____

Estimated increase (decrease) in Contract Price:

\$ _____

If the change involves an increase, the estimated amount is not to be exceeded without further authorization.

Estimated increase (decrease) in Contract Times

Substantial Completion: _____ days;

Ready for final payment: _____ days.

If the change involves an increase, the estimated times are not to be exceeded without further authorization.

RECOMMENDED:

ACCEPTED:

ENGINEER

CONTRACTOR

BY: _____

BY: _____

Contractor's Proposal Request Form

(Not a Change Order)

Date Submitted: _____

No. _____

TO: _____

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012
OWNER: CITY OF LOUISVILLE, COLORADO

We hereby request the cost of the following proposed change in the Contract. A breakdown of the proposed cost is attached.

Description of the proposed change:

All work shall be in accordance with the terms, stipulations, and conditions of the Contract Documents. If the Work herein requested is approved by Change Order, the time of completion will be (increased), (decreased), (unchanged) by _____ calendar days.

New Substantial Completion Date: _____, 2025.

This change will:

___ Increase the Contract by \$ _____
___ Decrease the Contract by \$ _____
___ No change in the Contract

SUBMITTED BY CONTRACTOR

CITY OF LOUISVILLE

BY: _____

___ Contractor's Proposal Request Accepted

DATE: _____

___ Contractor's Proposal Request Not Accepted

DATE: _____

BY: _____

DATE: _____

TITLE: _____

Contractor's Overtime Request Form

Date Submitted: _____, 2025

TO: _____

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012
OWNER: CITY OF LOUISVILLE, COLORADO

We hereby request to perform work on overtime in accordance with the terms, stipulations, and conditions of the Contract Documents.

Requested date of overtime work: _____, 2025

Requested hours of overtime work: _____ (a. m./p. m.) to _____ (a. m./p. m.)

Description of proposed overtime work:

No extra payment will be paid to the CONTRACTOR by the OWNER due to labor overtime or other increased costs of performing the Work on Friday afternoons, Saturdays, or at night. Should the CONTRACTOR desire to work on Friday afternoons or at night between the hours of 5:00 p.m. and 8:00 p.m., Monday-Thursday, or from 3:30 p.m. to 8:00 p.m. Friday, the CONTRACTOR shall submit a written request to the ENGINEER 24 hours prior. If approval is given by ENGINEER to CONTRACTOR for authorized overtime work, ENGINEER and ENGINEER's authorized personnel will charge overtime and other incidental administrative expenses necessary for performing inspections on Friday afternoons, or at night between the hours of 5:00 p.m. and 8:00 p.m., Monday-Thursday and 3:30 p.m. to 8:00 p.m. Friday, the CONTRACTOR will be responsible to pay for all such rates and charges, and shall not be granted a Contract Price increase for such charges.

Hours of overtime work shall only be allowed from 5:00 p.m. to 8:00 p.m. Monday thru Thursday, and from 3:30 p.m. to 8:00 p.m. Friday.

SUBMITTED BY CONTRACTOR

BY: _____

TITLE: _____

DATE: _____

CITY OF LOUISVILLE

____ Contractor's Proposal Request Accepted

____ Contractor's Proposal Request Not Accepted

BY: _____

DATE: _____

TITLE: _____

Certificate of Substantial Completion Form

TO: _____

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012
OWNER: CITY OF LOUISVILLE, COLORADO

This Certificate of Substantial Completion applies to all Work under the Contract Documents or to the following specified parts thereof:

The Work to which this Certificate applies has been inspected by authorized representatives of OWNER, and that Work is hereby declared to be substantially complete in accordance with the Contract Documents on

DATE OF SUBSTANTIAL COMPLETION

A tentative list of items to be completed or corrected is attached hereto. This list may not be all-inclusive, and the failure to include an item in the list does not alter the responsibility of CONTRACTOR to complete all the Work in accordance with the Contract Documents. The items in the tentative list shall be completed or corrected by CONTRACTOR within **twenty (20)** days of the issuance of this Certificate of Substantial Completion.

CONTRACTOR shall maintain all contractual responsibilities until Final Acceptance.

The following documents are attached to and made a part of this Certificate of Substantial Completion:

Attachments:

(For items to be attached see definition of Substantial Completion as supplemented and other specifically noted conditions precedent to achieving Substantial Completion as required by the Contract Documents.)

CERTIFICATE OF SUBSTANTIAL COMPLETION CONTINUED

This certificate does not constitute an acceptance of Work or start of the guarantee period nor its release of CONTRACTOR's obligation to complete the Work in accordance with the Contract Documents. Issuance of Substantial Completion does not commence the guarantee period with this certificate.

CITY OF LOUISVILLE, COLORADO

ACCEPTED BY CONTRACTOR

BY: _____

BY: _____

TITLE: _____

TITLE: _____

DATE: _____

DATE: _____

Final Inspection Report Form

DATE: _____, 2025

TO: _____

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012
OWNER: CITY OF LOUISVILLE, COLORADO

ENGINEER has performed final inspection of the Work, and accepts the Work subject to CONTRACTOR's performance and completion of the following repairs, corrections and/or replacements:

The ENGINEER does / does not (circle) hereby finally accept the work, and hereby certifies that CONTRACTOR is eligible to receive final payment of the Work.

CITY OF LOUISVILLE, COLORADO

CONTRACTOR

BY: _____

BY: _____

TITLE: _____

TITLE: _____

DATE: _____

DATE: _____

Certificate of Final Completion Form

DATE: _____, 2025

TO: _____

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012
OWNER: CITY OF LOUISVILLE, COLORADO

This Certificate of Final Completion applies to all Work under the Contract Documents, or to the following specified parts thereof:

(specify) _____

The Work to which this Certificate applies has been inspected by authorized representatives of ENGINEER and the Work is hereby declared to be complete in accordance with the Contract Documents on

DATE OF FINAL COMPLETION

In consideration therefor, OWNER agrees to make Final Payment to Contractor of all amounts retained by OWNER, except such amounts that are subject to verified claims pursuant to Section 38-26-107, C.R.S, if any.

CITY OF LOUISVILLE, COLORADO

CONTRACTOR

BY: _____

BY: _____

TITLE: _____

TITLE: _____

DATE: _____

DATE: _____

Guarantee Period Inspection Report Form

DATE: _____, 2025

TO: _____

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012
OWNER: CITY OF LOUISVILLE, COLORADO

ENGINEER's authorized representative performed the guarantee period inspection on _____, 20 __, which guarantee was originally due to expire on _____, 20__.

ENGINEER hereby determines that the project has ___/ has not ___ satisfactorily met the conditions required to pass the guarantee period inspection.

The identified following items of Work are defective and must be repaired, corrected, and/or replaced:

The guarantee period shall be extended for the items listed above until the following date:

_____, 20__

CITY OF LOUISVILLE, COLORADO

CONTRACTOR

BY: _____

BY: _____

TITLE: _____

TITLE: _____

DATE: _____

DATE: _____

Final Claim Release & Acceptance Form

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012
OWNER: CITY OF LOUISVILLE, COLORADO

Application for Payment Number: _____
Application for Payment Amount: _____
Application for Payment Date: _____

For valuable consideration, the receipt and sufficiency of which is hereby acknowledged, the undersigned hereby releases the City of Louisville, Colorado, and waives all rights of the undersigned to file a claim for material, equipment, tools, machinery, or services heretofore furnished for use in and for labor heretofore performed upon the construction, alteration, addition to or repair of the structure or improvements described in the Contract Documents as:

Project: 2025 STREET RESURFACING PROJECT
Description of Property: VARIOUS ASPHALT PAVEMENT, CITY OF LOUISVILLE
Owner: CITY OF LOUISVILLE, COLORADO

We acknowledge that the foregoing is an adequate description of the real property and improvements to which this Claim Release pertains inasmuch as the foregoing description is the description given in the Contract Documents, which govern the performance of the Work for which consideration has been received.

In executing this release, we certify that all claims for labor or materials, or both, furnished or performed by the undersigned or on our behalf by our material suppliers or subcontractors have been paid or that satisfactory arrangements for payment have been made and we hereby waive and release any and all rights, claims and liens which the undersigned may now or hereafter have, claim or assert against the project, the Owner, or any funds in Owner's possession or control concerning the project, or against all land and any improvements and appurtenances to the land improved by the project.

In consideration of the final payment made or to be made to the undersigned and to induce said payment, we hereby further release and forever discharge the City of Louisville, its officers and employees, from any and all liability, actions, causes of action, claims, demands, damages, costs, loss of services, loss of properties, expenses, compensation and any and all consequential damages or injuries, which the undersigned may now or hereafter have, claim or assert on account of, relating to, or in any way arising out of the above described project.

In further consideration of the payment made or to be made to the undersigned and to induce said payment, we agree to defend and indemnify the City of Louisville, its officers and employees from any claim or claims on the part of our material suppliers, laborers, employees, servants, and agents, or subcontractors arising from our work on this project, and we further agree to fully satisfy any such claim brought against the City of Louisville and reimburse the City of Louisville for any and all costs, including reasonable attorney fees, which it may incur as a result of such claims.

FINAL CLAIM RELEASE & ACCEPTANCE CONTINUED

As contactor on the above described project, we further accept the pay quantities and final payment indicated on the final payment application as correct. The above noted final payment of \$_____ results in total cumulative payment of \$_____ for this project. By accepting this final payment, we accept that the final payment application is full and complete, that no other or further amounts are due to the undersigned, and we hereby waive and release all rights, claims, and liens arising from the completion of work under the Contract Documents.

The undersigned representative certifies to have full authority to execute this instrument and to bind the contractor to all statement and provisions herein contained.

PRIME CONTRACTOR

By:

President

Date:

Claim Release – Subcontractor/Supplier

PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NUMBER: 301312-660012
OWNER: CITY OF LOUISVILLE, COLORADO

For valuable consideration, the receipt and sufficiency of which is hereby acknowledged, the undersigned hereby releases the City of Louisville, Colorado, and waives all rights of the undersigned to file a claim for material, equipment, tools, machinery, or services heretofore furnished for use in and for labor heretofore performed upon the construction, alteration, addition to or repair of the structure or improvements described in the Contract Documents as:

Project: 2025 STREET RESURFACING PROJECT

Description of Property: VARIOUS ASPHALT PAVEMENT, CITY OF LOUISVILLE

Owner: CITY OF LOUISVILLE, COLORADO

We acknowledge that the foregoing is an adequate description of the real property and improvements to which this Claim Release pertains inasmuch as the foregoing description is the description given in the Contract Documents, which govern the performance of the Work for which consideration has been received.

In executing this release, we certify that all claims for labor or materials, or both, furnished or performed by the undersigned or on our behalf by our material suppliers or subcontractors have been paid or that satisfactory arrangements for payment have been made, and we hereby waive and release any and all rights, claims and liens which the undersigned may now or hereafter have, claim or assert against the project, the Owner, or any funds in Owner's possession or control concerning the project, or against all land and any improvements and appurtenances to the land improved by the project.

In consideration of the final payment made or to be made to the undersigned and to induce said payment, we hereby further release and forever discharge the City of Louisville, its officers and employees, from any and all liability, actions, causes of action, claims, demands, damages, costs, loss of services, loss of properties, expenses, compensation and any and all consequential damages or injuries, which the undersigned may now or hereafter have, claim or assert on account of, relating to, or in any way arising out of the above described project.

In further consideration of the payment made or to be made to the undersigned and to induce said payment, we agree to defend and indemnify the City of Louisville, its officers and employees from any claim or claims on the part of our material suppliers, laborers, employees, servants, and agents, or subcontractors arising from our work on this project, and we further agree to fully satisfy any such claim brought against the City of Louisville and reimburse the City of Louisville for any and all costs, including reasonable attorney fees, which it may incur as a result of such claims.

SUPPLIER OR SUBCONTRACTOR

By: _____
President

Date: _____

PRIME CONTRACTOR

By: _____
President

Date: _____

General Conditions

Article 1. Definitions

Wherever used in these General Conditions or in the other Contract Documents the following terms have the meanings indicated which are applicable to both the singular and plural thereof:

- 1.0 Abnormal Weather** - Snowfall, rainfall, freezing temperatures, or wind conditions, in excess of those encountered in the project area of Boulder County during the past 10 years that necessitates cessation of Work and causes consequence to the project.
- 1.1 Addenda** - Written or graphic instruments issued prior to the opening of Bids, which clarify, correct or change the Bidding Requirements or the Contract Documents.
- 1.2 Agreement** - The written contract between OWNER and CONTRACTOR covering the Work to be performed; other Contract Documents are attached to the Agreement and made a part thereof as provided therein.
- 1.3 Application for Payment** - The form accepted by ENGINEER which is to be used by CONTRACTOR in requesting progress or final payments and which is to be accompanied by such supporting documentation as is required by the Contract Documents.
- 1.4 Asbestos** - Any material that contains more than one percent asbestos and is friable or is releasing asbestos fibers into the air above current action levels established by the United States Occupational Safety and Health Administration.
- 1.5 Bid** - The offer or proposal of the Bidder submitted on the prescribed form setting forth the prices for the Work to be performed.
- 1.6 Bidding Documents** - The advertisement or invitation to Bid, Instructions to Bidders, the Bid form, and the proposed Contract Documents (including all Addenda issued prior to receipt of Bids).
- 1.7 Bidding Requirements** - The advertisement or invitation to Bid, Instructions to Bidders, and the Bid form.
- 1.8 Bonds** - Performance and Payment bonds and other instruments of security.
- 1.9 Change Order** - A document recommended by ENGINEER, which is signed by CONTRACTOR and OWNER and authorizes an addition, deletion, or revision in the Work, or an adjustment in the Contract Price or the Contract Times, issued on or after the Effective Date of the Agreement.
- 1.10 Contract Day** - A Contract Day specifies that construction will be completed Monday through Sunday, excluding OWNER-observed holidays and Abnormal Weather days.
- 1.11 Contract Documents** - The Agreement, Addenda (which pertain to the Contract Documents), CONTRACTOR's Bid (including documentation accompanying the Bid and any post Bid documentation submitted prior to the Notice Award) when attached as an exhibit to the Agreement, the Notice to Proceed, the Bonds, these General Conditions, the Supplementary

Conditions, the Specifications and the Drawings as the same are more specifically identified in the Agreement, together with all Written Amendments, Change Orders, Work Change Directives, Field Orders, and ENGINEER's written interpretations and clarifications issued pursuant to paragraphs 3.5, 3.6.1, and 3.6.3 on or after the Effective Date of the Agreement. Shop Drawing submittals approved pursuant to paragraphs 6.26 and 6.27 and the reports and drawings referred to in paragraphs 4.2.1.1 and 4.2.2.2 are not Contract Documents.

- 1.12 Contract Price** - The monies payable by OWNER to CONTRACTOR for completion of the Work in accordance with the Contract Documents as stated in the Agreement (subject to the provisions of paragraph 11.9.1 in the case of Unit Price Work).
- 1.13 Contract Times** - The numbers of days or the dates stated in the Agreement: (i) to achieve Substantial Completion, and (ii) to complete the Work so that it is ready for final payment as evidenced by ENGINEER's written recommendation of final payment in accordance with paragraph 14.13.
- 1.14 CONTRACTOR** - The person, firm, or corporation with whom OWNER has entered into the Agreement.
- 1.15 Defective** - An adjective which when modifying the work refers to Work that is unsatisfactory, faulty or deficient, in that it does not conform to the Contract Documents, or does not meet the requirements of any inspection, reference standard, test or approval referred to in the Contract Documents, or has been damaged prior to ENGINEER's recommendation of final payment (unless responsibility for the protection thereof has been assumed by OWNER at Substantial Completion in accordance with paragraph 14.8 or 14.10).
- 1.16 Drawings** - The drawings that show the scope, extent, and character of the Work to be furnished and performed by CONTRACTOR and which have been prepared or approved by ENGINEER and are referred to in the Contract Documents. Shop drawings are not Drawings as so defined.
- 1.17 Effective Date of the Agreement** - The date indicated in the Agreement on which it becomes effective, but if no such date is indicated it means the date on which the Agreement is signed and delivered by the last of the two parties to sign and deliver.
- 1.18 ENGINEER** - The word "ENGINEER" refers to the City of Louisville, Director of Public Works or his authorized representative, designated by OWNER as its Engineering representative.
- 1.19 OWNER'S Consultant** - A person, firm, or corporation having a contract with OWNER to furnish services as OWNER's independent professional associate or consultant with respect to the Project and who is identified as such in the Supplementary Conditions.
- 1.20 Field Order** - A written order issued by ENGINEER which orders minor changes in the Work in accordance with paragraph 9.5 but which does not involve a change in the Contract Price or the Contract Times.
- 1.21 General Requirements** - Sections of Division 1 of the Specifications.
- 1.22 Hazardous Waste** - The term Hazardous Waste shall have the meaning provided in Section 1004 of the Solid Waste Disposal Act (42 USC Section 6903) as amended from time to time.

- 1.23 Laws and Regulation: Laws or Regulations** - Any and all applicable laws, rules, regulations, ordinances, codes, and orders of any and all governmental bodies, agencies, authorities, and courts having jurisdiction.
- 1.24 Liens** - Liens, charges, security interests, or encumbrances upon real property or personal property.
- 1.25 Milestone** - A principal event specified in the Contract Documents relating to an intermediate completion date or time prior to Substantial Completion of all the Work.
- 1.26 Notice of Award** - The written notice by OWNER to the apparent SUCCESSFUL BIDDER stating that upon compliance by the apparent SUCCESSFUL BIDDER with the conditions precedent enumerated therein, within the time specified, OWNER will sign and deliver the Agreement.
- 1.27 Notice to Proceed** - A written notice given by OWNER to CONTRACTOR (with a copy to ENGINEER) fixing the date on which the Contract Times will commence to run and on which CONTRACTOR shall start to perform CONTRACTOR's obligations under the Contract Documents.
- 1.28 OWNER** - The public body or authority, corporation, association, firm, or person with whom CONTRACTOR has entered into the Agreement and for whom the Work is to be provided.
- 1.29 Partial Utilization** - Use by OWNER of a substantially completed part of the Work for the purpose for which it is intended (or a related purpose) prior to Substantial Completion of all the Work.
- 1.30 PCBs** - Polychlorinated biphenyls.
- 1.31 Petroleum** - Petroleum, including crude oil or any fraction thereof which is liquid at standard conditions of temperature and pressure (60 degrees Fahrenheit and 14.7 pounds per square inch absolute), such as oil, petroleum, fuel oil, oil sludge, oil refuse, gasoline, kerosene, and oil mixed with other non-Hazardous Wastes and crude oils.
- 1.32 Plans** - The term plans as used in these Contract Documents shall have the same meaning as Drawings.
- 1.33 Product** - Includes materials, equipment, and systems.
- 1.34 Project** - The total construction of which the Work to be provided under the Contract Documents may be the whole, or a part as indicated elsewhere in the Contract Documents.
- 1.35 Provide** - Furnish and install specified materials and equipment unless the context requires otherwise.
- 1.36 Radioactive Material** - Source, special nuclear, or byproduct material as defined by the Atomic Energy Act of 1954 (42 USC Section 2011 et seq.) as amended from time to time.
- 1.37 Resident Project Representative** - The authorized representative of ENGINEER who may be assigned to the site or any part thereof.

- 1.38 Samples** - Physical examples of materials, equipment, or workmanship that are representative of some portion of the Work and which establish the standards by which such portion of the Work will be judged.
- 1.39 Shop Drawings** - All drawings, diagrams, illustrations, schedules, and other data or information which are specifically prepared or assembled by or for CONTRACTOR and submitted by CONTRACTOR to illustrate some portion of the Work.
- 1.40 Specifications** - Those portions of the Contract Documents consisting of written technical descriptions of materials, equipment, construction systems, standards, and workmanship as applied to the Work and certain administrative details applicable thereto.
- 1.41 Subcontractor** - An individual, firm, or corporation having a contract with CONTRACTOR or with any other Subcontractor for the performance of a part of the Work at the site.
- 1.42 Substantial Completion** - The Work (or a specified part thereof) has progressed to the point where, in the opinion of ENGINEER as evidenced by ENGINEER's definitive certificate of Substantial Completion, it is sufficiently complete, in accordance with the Contract Documents, so that the Work (or specified part) can be utilized for the purposes for which it is intended; or if no such certificate is issued, when the Work is complete and ready for final payment as evidenced by ENGINEER's written recommendation of final payment in accordance with paragraph 14.13. The terms "substantially complete" and "substantially completed" as applied to all or part of the Work refer to Substantial Completion thereof.
- 1.43 Supplementary Conditions** - The part of the Contract Documents which amends or supplements these General Conditions.
- 1.44 Supplier** - A manufacturer, fabricator, supplier, distributor, material man, or vendor having a direct contract with CONTRACTOR or with any Subcontractor to furnish materials or equipment to be incorporated in the Work by CONTRACTOR or any Subcontractor.
- 1.45 Underground Facilities** - All pipeline, conduits, ducts, cables, wires, manholes, vaults, tanks, tunnels, or other such facilities or attachments, and any encasements containing such facilities which have been installed underground to furnish any of the following services or materials: electricity, gases, steam, liquid petroleum products, telephone or other communications, cable television, sewage and drainage removal, traffic or other control systems, or water.
- 1.46 Unit Price Work** - Work to be paid for on the basis of unit prices.
- 1.47 Work** - The entire completed construction or the various separately identifiable parts thereof required to be furnished under the Contract Documents. Work includes and is the result of performing or furnishing labor and furnishing and incorporating materials and equipment into the construction, and performing or furnishing services and furnishing documents, all as required by the Contract Documents.
- 1.48 Work Change Directive** - A written directive to CONTRACTOR, issued on or after the Effective Date of the Agreement and signed by OWNER and recommended by ENGINEER, ordering an addition, deletion or revision in the Work, or responding to differing or unforeseen physical conditions under which the Work is to be performed as provided in paragraph 4.2 or 4.3 or emergencies under paragraph 6.23. A Work Change Directive will not change the Contract Price

or the Contract Times, but is evidence that the parties expect that the change directed or documented by a Work Change Directive will be incorporated in a subsequently issued Change Order following negotiations by the parties as to its effect, if any, on the Contract Price or Contract Times as provided in paragraph 10.2.

- 1.49 Written Amendment** - A written amendment of the Contract Documents, signed by OWNER and CONTRACTOR on or after the Effective Date of the Agreement and normally dealing with the non-engineering or non-technical rather than strictly construction-related aspects of the Contract Documents.

Article 2. Preliminary Matters

Delivery of Bonds

- 2.1 When CONTRACTOR delivers the executed Agreement to OWNER, CONTRACTOR shall also deliver to OWNER such Bonds and Certificates of Insurance as CONTRACTOR may be required to furnish in accordance with Article 5.

Copies of Documents

- 2.2 OWNER shall furnish to CONTRACTOR up to four copies of the contract documents for the execution of the Work. Additional copies will be furnished, upon request, at the cost of reproduction.

Commencement of Contract Times; Notice to Proceed

- 2.3 The Contract Times will commence to run on the day indicated in the Notice to Proceed. Timing and completion of the **2025 Street Resurfacing Project** is based on **72** contract days (base bid), assuming a Notice to Proceed issued on May 15, 2025. OWNER has set the proposed project schedule and plans to implement the following schedule for this project. CONTRACTOR shall be required to start construction on or before the start date listed below:

Proposed Project Schedule

Advertisement.....	January 24 & 31, 2025
Pre-Bid Conference	February 4, 2025
Bid Opening.....	February 12, 2025
Contract Award by City Council	March 18, 2025
Notice of Award Issued	March 19, 2025
Neighborhood Meeting Notice Sent.....	March 21, 2025
Bonds & Insurance Certificates due.....	March 19, 2025
Contract Agreement Executed.....	March 19, 2025
Pre-Construction Conference	April 9, 2025
Neighborhood Meeting	May 14, 2025
Notice to Proceed Issued	May 15, 2025
Contract Time Commences to run	May 19, 2025
Substantial Completion.....	August 29, 2025

Starting the Work

- 2.4 CONTRACTOR shall start to perform the Work on the date when the Contract Times commence to run, but no Work shall be done at the site prior to the date on which the Contract Times commence to run.

Before Starting Construction

- 2.5 Before undertaking each part of the Work, CONTRACTOR shall carefully study and compare the Contract Documents and check and verify pertinent figures shown thereon and all applicable field measurements. CONTRACTOR shall promptly report in writing to ENGINEER any conflict, error, ambiguity or discrepancy which CONTRACTOR may discover and shall obtain a written interpretation or clarification from ENGINEER before proceeding with any Work affected thereby; however, CONTRACTOR shall not be liable to OWNER or ENGINEER for failure to report any conflict, error, ambiguity, or discrepancy in the Contract Documents, unless CONTRACTOR knew or reasonably should have known thereof.
- 2.6 Within ten days after the Effective Date of the Agreement (unless otherwise specified in the General Requirements), CONTRACTOR shall submit to ENGINEER for review:
- 2.6.1 A preliminary progress schedule indicating the times (numbers of days or dates) for starting and completing the various stages of the Work, including any Milestone specified in the Contract Documents;
 - 2.6.2 A preliminary schedule of Shop Drawing and Sample submittals which will list each required submittal and the times for submitting, reviewing and processing such submittal.

Preconstruction Conference

- 2.7 Before any Work at the site is started, a conference attended by CONTRACTOR, ENGINEER, and others as appropriate will be held to establish a working understanding among the parties as to the Work and to discuss the schedules referred to in paragraph 2.6, procedures for handling Shop Drawings and other submittal(s), processing Applications for Payment, and maintaining required records.

Initially Acceptable Schedules

- 2.8 Unless otherwise provided in the Contract Documents, at least ten days before submission of the first Application for Payment a conference attended by CONTRACTOR, ENGINEER, and others as appropriate will be held to review the Application for Payment for acceptability to ENGINEER. No progress payment shall be made to CONTRACTOR until the schedules are submitted to and acceptable to ENGINEER as provided below. The progress schedule will be acceptable to ENGINEER as providing an orderly progression of the Work to completion within any specified Milestones and the Contract Times, but such acceptance will neither impose on ENGINEER responsibility for the sequencing, scheduling, or progress of the Work nor interfere with or relieve CONTRACTOR from CONTRACTOR's full responsibility therefor. CONTRACTOR's schedule of Shop Drawing and Sample submissions will be acceptable to ENGINEER as providing a workable arrangement for reviewing and processing the required submittals.

Article 3. Contract Documents: Intent, Amending, Reuse

Intent

- 3.1 The Contract Documents comprise the entire agreement OWNER and CONTRACTOR concerning the Work. The Contract Documents are complementary; what is called for by one is as binding as if called for by all. The Contract Documents will be construed in accordance with the law of the place of the Project.
- 3.2 It is the intent of the Contract Documents to describe a functionally complete Project (or part thereof) to be constructed in accordance with the Contract Documents. Any Work, materials, or equipment that may reasonably be inferred from the Contract Documents or from prevailing custom or trade usage as being required to produce the intended result will be furnished and performed whether or not specifically called for. When words or phrases, which have a well-known technical or construction industry or trade meaning, are used to describe Work, materials or equipment, such words or phrases shall be interpreted in accordance with that meaning. Clarifications and interpretations of the Contract Documents shall be issued by ENGINEER as provided in paragraph 9.4.

Reference to Standards & Specifications of Technical Societies; Reporting and Resolving Discrepancies

3.3

- 3.3.1. Reference to standards, specifications, manuals, or codes of any technical society, organization or association, or to the Laws or Regulations of any governmental authority, whether such reference be specific or by implication, shall mean the latest standard, specification, manual, code, or Laws or Regulations in effect at the time of opening of Bids (or, on the Effective Date of the Agreement if there were no Bids), except as may be otherwise specifically stated in the Contract Documents.
- 3.3.2 If, during the performance of the Work, CONTRACTOR discovers any conflict, error ambiguity or discrepancy within the Contract Documents or between the Contract Documents and any provision of any such Law or Regulation applicable to the performance of the Work or of any such standard, specification, manual or code or of any instruction of any Supplier referred to in paragraph 6.5, CONTRACTOR shall report it to ENGINEER in writing at once, and, CONTRACTOR shall not proceed with the Work affected thereby (except in an emergency as authorized by paragraph 6.23) until an amendment or supplement to the Contract Documents has been issued by one of the methods indicated in paragraph 3.5 or 3.6; provided, however, that CONTRACTOR shall not be liable to OWNER or ENGINEER for failure to report any such conflict, error, ambiguity or discrepancy unless CONTRACTOR knew or reasonably should have known thereof. Upon notification to ENGINEER, CONTRACTOR shall proceed with other parts of the Work not affected by the conflict, error, ambiguity, or discrepancy.
- 3.3.3 Except as otherwise specifically stated in the Contract Documents or as may be provided by amendment or supplement thereto issued by one of the methods indicated in paragraph 3.5 or 3.6, the provisions of the Contract Documents shall take precedence in resolving any conflict, error, ambiguity or discrepancy between the provisions of the Contract Documents and:

- 3.3.3.1 The provisions of any such standard, specification, manual, code, or instruction (whether or not specifically incorporated by reference in the Contract Documents); or
- 3.3.3.2 The provisions of any such Laws or Regulations applicable to the performance of the Work (unless such an interpretation of the provisions of the Contract Documents would result in violation of such Law or Regulation).

No provision of any such standard, specification, manual, code, or instruction shall be effective to change the duties and responsibilities of OWNER, CONTRACTOR, or ENGINEER, or any of their subcontractors, consultants, agents, or employees from those set forth in the Contract Documents, nor shall it be effective to assign to OWNER, ENGINEER, or any of ENGINEER's Consultants, agents or employees any duty or authority to supervise or direct the furnishing or performance of the Work or any duty or authority to undertake responsibility inconsistent with the provisions of paragraph 9.13 or any other provision of the Contract Documents.

- 3.4 Whenever in the Contract Documents the terms "as ordered", "as directed", "as required", "as allowed", "as approved", or terms of like effect or import are used, or the adjectives "reasonable", "suitable", "acceptable", "proper", or "satisfactory" or adjectives of like effect or import are used to describe a requirement, direction, review, or judgment of ENGINEER as to the Work, it is intended that such requirement, direction, review, or judgment will be solely to evaluate, in general, the completed Work for compliance with the requirements of and information in the Contract Documents and conformance with the design concept of the completed Project as a functioning whole as shown or indicated in the Contract Documents (unless there is a specific statement indicating otherwise). The use of any such term or adjective shall not be effective to assign to ENGINEER any duty or authority to supervise or direct the furnishing or performance of the Work or any duty or authority to undertake responsibility contrary to the provisions of paragraph 9.13 or any other provision of the Contract Documents.

Amending and Supplementing Contract Documents

- 3.5 The Contract Documents may be amended to provide for additions, deletions, and revisions in the Work or to modify the terms and conditions thereof in one or more of the following ways:
 - 3.5.1 a formal Written Amendment,
 - 3.5.2 a Change Order (pursuant to paragraph 10.4), or
 - 3.5.3 a Work Change Directive (pursuant to paragraph 10.1).
- 3.6 In addition, the requirements of the Contract Documents may be supplemented, and minor variations and deviations in the Work may be authorized, in one or more of the following ways:
 - 3.6.1 a Field Order (pursuant to paragraph 9.5),
 - 3.6.2 ENGINEER's approval of a Shop Drawing or Sample (pursuant to paragraphs 6.26 and 6.27), or
 - 3.6.3 ENGINEER's written interpretation or clarification (pursuant to paragraph 9.4).

Reuse of Documents

- 3.7 CONTRACTOR, and any Subcontractor or Supplier or other person or organization performing or furnishing any of the Work under a direct or indirect contract with OWNER (i) shall not have or acquire any title to or ownership rights in any of the Drawings, Specifications, or other documents (or copies of any thereof) prepared by or bearing the seal of ENGINEER or ENGINEER's Consultant, and (ii) shall not reuse any of such Drawings, Specifications, other documents or copies on extensions of the Project or any other project without written consent of OWNER and ENGINEER and specific written verification or adaption by ENGINEER.

Article 4. Availability of Lands; Subsurface and Physical Conditions; Reference Points

Availability of Lands

- 4.1 OWNER shall furnish, as indicated in the Contract Documents, the lands upon which the Work is to be performed, rights-of-way and easements for access thereto, and such other lands which are designated for the use of CONTRACTOR. OWNER shall identify any encumbrances or restrictions not of general application but specifically related to use of lands so furnished with which CONTRACTOR will have to comply in performing the Work. Easements for permanent structures or permanent changes in existing facilities will be obtained and paid for by OWNER, unless otherwise provided in the Contract Documents. If CONTRACTOR and OWNER are unable to agree on entitlement to or the amount or extent of any adjustments in the Contract Price or the Contract Times as a result of any delay in OWNER's furnishing these lands, rights-of-way or easements, CONTRACTOR may make a claim therefor as provided in Articles 11 and 12. CONTRACTOR shall provide for all additional lands and access thereto that may be required for temporary construction facilities or storage of materials and equipment.

Subsurface and Physical Conditions

- 4.2 BIDDERS are responsible for examining and determining for themselves the location and nature of the proposed Work, the amount and character of the labor and materials required therefor, and the difficulties, which may be encountered. BIDDERS may not rely on oral or written representations made by OWNER, including reports and drawings identified pursuant to 4.2.1 and subparagraphs thereof, unless OWNER has guaranteed in writing that such representation is factually accurate, and by submitting a Bid, each BIDDER waives all liability for any error in any representation made by OWNER to BIDDER. BIDDERS shall inspect the site and its surroundings and conduct such supplementary examinations, investigations, and tests concerning conditions at or contiguous to the site (including surface, and subsurface) which may affect cost, progress, performance, or furnishing of the Work or which relate to any aspect of the means, methods, techniques, sequences, or procedures of construction to be employed by BIDDER and safety precautions and programs incident thereto for performing the Work in accordance with the Contract Documents. By failing to make such an inspection, BIDDER waives all rights to claim extra payment or time extensions due to unexpected conditions, which could have been determined had the site been reasonably inspected. If concealed or unknown conditions differ materially from those ordinarily encountered and generally recognized as inherent in the Work, or differ materially from the conditions indicated in the Contract Documents, then an equitable adjustment in the Contract Price or in the Contract Time will be allowed by change order as provided in Article 11 or Article 12 respectively. By submitting a Bid, BIDDER represents that

BIDDER's observations at the site are not inconsistent with the requirements of the proposed Contract Documents, unless otherwise noted by BIDDER.

Reports and Drawings

4.2.1 Reference is made to the Supplementary Conditions for identification of:

The following reports of explorations and tests of subsurface conditions at the site of the Work:

Subsurface Conditions

4.2.1.1 Those reports of explorations and tests of subsurface conditions at or contiguous to the site that have been utilized by ENGINEER in preparing the Contract Documents; and

Report dated **N/A**, prepared by **N/A** entitled: **N/A**. The technical data contained in such report upon which CONTRACTOR may rely is **N/A**.

Copies of these reports that are not included with Bidding Documents may be examined at ENGINEER's office during regular business hours. Please call for appointment. Copies of such reports are not available for distribution. These reports and drawings are not part of the Contract Documents, but the technical data contained therein upon which CONTRACTOR is entitled to rely as provided in GC-4.2 and as identified and established above are incorporated therein by reference.

Physical Conditions

4.2.1.2 Those drawings of physical conditions in or relating to existing surface or subsurface structures at or contiguous to the site (except Underground Facilities) that have been utilized by ENGINEER in preparing the Contract Documents.

Limited Reliance by CONTRACTOR authorized; Technical Data

4.2.2 Reports and drawings identified pursuant to paragraph 4.2 are not Contract Documents. Unless otherwise set forth in the Contract Documents or OWNER has otherwise guaranteed in writing that such representation is factually accurate, CONTRACTOR may not rely upon or make any claim against OWNER, ENGINEER, or ENGINEER's consultants with respect to the accuracy of any "technical data" contained in reports and drawings and CONTRACTOR may not rely upon or make any claim against OWNER, ENGINEER, or ENGINEER's consultants with respect to:

4.2.2.1 The completeness of such reports and drawings for CONTRACTOR's purposes, including, but not limited to, any aspects of the means, methods, techniques, sequences, and procedures of construction to be employed by CONTRACTOR and safety precautions and programs incident thereto, or

- 4.2.2.2 other data, interpretations, opinions, and information contained in such reports or shown or indicated in such drawings, or
- 4.2.2.3 any CONTRACTOR interpretation of or conclusion drawn from any "technical data" or any such data, interpretations, opinions, or information.
- 4.2.3 CONTRACTOR shall not be entitled to any adjustment in the Contract Price or Times if:
 - 4.2.3.1 CONTRACTOR knew of the existence of such conditions at the time CONTRACTOR made a final commitment to OWNER in respect of Contract Price and Contract Times by the submission of a bid or becoming bound under a negotiated contract; or
 - 4.2.3.2 the existence of such condition could reasonably have been discovered or revealed as a result of any examination, investigation, exploration, test, or study of the site and contiguous areas required by the Bidding Requirements or Contract Documents to be conducted by or for CONTRACTOR prior to CONTRACTORs making such final commitment.

If OWNER and CONTRACTOR are unable to agree on entitlement to or as to the amount or length of any such equitable adjustment in the Contract Price or Contract Times, a claim may be made therefor as provided in Articles 11 and 12. However, OWNER, ENGINEER, and ENGINEER's Consultants shall not be liable to CONTRACTOR for any claims, costs, losses, or damages sustained by CONTRACTOR on or in connection with any other project or anticipated project.

Physical Conditions - Underground Facilities

4.3

Shown or Indicated

- 4.3.1 The information and data shown or indicated in the Contract Documents with respect to existing Underground Facilities at or contiguous to the site is based on information and data furnished to OWNER or ENGINEER by the owners of such Underground Facilities or by others.
 - 4.3.1.1 OWNER and ENGINEER shall not be responsible for the accuracy or completeness of any such information or data; and
 - 4.3.1.2 The cost of all of the following will be included in the Contract Price and CONTRACTOR shall have full responsibility for: (i) reviewing and checking all such information and data, (ii) locating all Underground Facilities shown or indicated in the Contract Documents, (iii) coordination of the Work with the owners of such Underground Facilities during construction, and (iv) the safety and protection of all such Underground Facilities as provided in paragraph 6.20 and repairing any damage thereto resulting from the Work.

Not Shown or Indicated

- 4.3.2 If an Underground Facility is uncovered or revealed at or contiguous to the site which was not shown or indicated in the Contract Documents, CONTRACTOR shall, promptly after becoming aware thereof and before further disturbing conditions affected thereby or performing any Work in connection therewith (except in an emergency as required by paragraph 6.23), identify the owner of such Underground Facility and give written notice to that owner and to OWNER and ENGINEER. CONTRACTOR shall be responsible for the safety and protection of such Underground Facility as provided in paragraph 6.20. CONTRACTOR shall be allowed an increase in the Contract Price or an extension of the Contract Times, or both, to the extent that they are attributable to the existence of any Underground Facility that was not shown or indicated in the Contract Documents and that CONTRACTOR did not know of and could not reasonably have been expected to be aware of or to have anticipated. If OWNER and CONTRACTOR are unable to agree on entitlement to or the amount or length of any such adjustment in Contract Price or Contract Times, CONTRACTOR may make a claim therefor as provided in Articles 11 and 12. However, OWNER, ENGINEER, and ENGINEER's Consultants shall not be liable to CONTRACTOR for any claims, costs, losses, or damages incurred or sustained by CONTRACTOR on or in connection with any other project or anticipated project.

Reference Points

- 4.4 OWNER shall provide engineering surveys to establish baseline and benchmarks for construction, which in ENGINEER's judgment are necessary to enable CONTRACTOR to proceed with the Work. CONTRACTOR shall be responsible for laying out the Work, shall protect and preserve the established reference points, and shall make no changes or relocations without the prior written approval of OWNER. CONTRACTOR shall report to ENGINEER whenever any reference point is lost or destroyed or requires relocation because of necessary changes in grades or locations and shall be responsible for the accurate replacement or relocation of such reference points by professionally qualified personnel.

OWNER shall provide survey reference points, construction stakes, lines and grades required for the completion of the work specified in the specifications, on the plans, or in the Special Conditions. Additional staking requested by CONTRACTOR will be at CONTRACTOR'S expense. When CONTRACTOR requires staking, he shall notify OWNER of his requirements in writing a reasonable length of time in advance of starting work that require construction staking. Under no circumstances shall a notice of less than 2 contract days be considered a reasonable length of time. Failure of CONTRACTOR to provide 2 contract days written notice to OWNER of his staking requests shall relieve OWNER from any responsibility for additional costs or delays caused by such failure. CONTRACTOR shall carefully preserve stakes set by OWNER. When stakes are destroyed or damaged, CONTRACTOR will be charged for the cost of necessary replacement or restoration of stakes. The charge for replacement and restoration of stakes will be deducted from any moneys due or to become due CONTRACTOR.

Asbestos, PCBs Petroleum, Hazardous Waste, or Radioactive Material

- 4.5

- 4.5.1 OWNER shall be responsible for any Asbestos, PCBs, Petroleum, Hazardous Waste, or Radioactive Material uncovered or revealed at the site which was not shown or indicated in Drawings or Specifications or identified in the Contract Documents to be within the scope of the Work and which may present a substantial danger to persons or property exposed thereto in connection with the Work at the site. OWNER shall not be responsible for any such materials brought to the site by CONTRACTOR, Subcontractor, Suppliers, or anyone else for whom CONTRACTOR is responsible.
- 4.5.2 CONTRACTOR shall immediately: (i) stop all Work in connection with such hazardous condition and in any area affected thereby (except in an emergency as required by paragraph 6.23), and (ii) notify OWNER and ENGINEER (and thereafter confirm such notice in writing). OWNER shall promptly consult with ENGINEER concerning the necessity for OWNER to retain a qualified expert to evaluate such hazardous condition or take corrective action, if any. CONTRACTOR shall not be required to resume Work in connection with such hazardous condition or in any such affected area until after OWNER has obtained any required permits related thereto and delivered to CONTRACTOR special written notice: (i) specifying that such condition and any affected area is or has been rendered safe for the resumption of Work, or (ii) specifying any special conditions under which such Work may be resumed safely. If OWNER and CONTRACTOR cannot agree as to entitlement to or the amount or extent of an adjustment, if any, in Contract Price or Contract Times as a result of such Work stoppage or such special conditions under which Work is agreed by CONTRACTOR to be resumed, either party may make a claim therefor as provided Articles 11 and 12.
- 4.5.3 If after receipt of such special written notice CONTRACTOR does not agree to resume such Work based on a reasonable belief it is unsafe, or does not agree to resume such Work under such special conditions, then OWNER may order such portion of the Work that is in connection with such hazardous condition or in such affected area to be deleted from the Work. If OWNER and CONTRACTOR cannot agree as to entitlement to or the amount or extent of an adjustment, if any, in Contract Price or Contract Times as a result of deleting such portion of the Work, then either party may make a claim therefor as provided in Articles 11 and 12. OWNER may have such deleted portion of the Work performed by OWNER's own forces or others in accordance with Article 7.
- 4.5.4 The provisions of paragraphs 4.2 and 4.3 are not intended to apply to Asbestos, PCBs, Petroleum, Hazardous Waste, or Radioactive Material uncovered or revealed at the site.

Article 5. Bonds and Insurance

Performance, Payment, and Other Bonds

- 5.1 CONTRACTOR shall furnish Performance and Payment Bonds, each in an amount at least equal to the Contract Price as security for the faithful performance and payment of all CONTRACTOR's obligations under the Contract Documents. These Bonds shall remain in effect at least until one year after the date when final payment becomes due, except as provided otherwise by Laws or Regulations or by the Contract Documents. CONTRACTOR shall also furnish such other Bonds as are required by the Supplementary Conditions. All Bonds shall be in the form prescribed by the Contract Documents except as provided otherwise by Laws or Regulations and shall be executed by such sureties as are named in the current list of "Companies Holding Certificates of Authority as Acceptable Sureties on Federal Bonds and as Acceptable Reinsuring Companies" as published in Circular 570 (amended) by the Audit Staff, Bureau of Government Financial Operations, U.S. Treasury Department. All Bonds signed by an agent must be accompanied by a certified copy of such agent's authority to act. CONTRACTOR shall furnish the performance and payment bond in the form provided in the Contract Documents or approved by OWNER; the earlier of ten (10) days after OWNER has issued the notice of award or delivery of the executed Agreement. OWNER reserves the right to exclude any Surety Company on any ground it deems appropriate. The cost of the bonds shall be included in the bid.
- 5.2 If the surety on any Bond furnished by CONTRACTOR is declared a bankrupt or becomes insolvent or its right to do business is terminated in any state where any part of the Project is located or it ceases to meet the requirements of paragraph 5.1, CONTRACTOR shall within ten days thereafter substitute another Bond and surety, both of which must be acceptable to OWNER.

Licensed Sureties and Insurers; Certificates of Insurance

5.3

- 5.3.1 All Bonds and insurance required by the Contract Documents to be purchased and maintained by CONTRACTOR shall be obtained from surety or insurance companies acceptable to OWNER that are duly licensed to transact business in the State of Colorado and to issue Bonds or insurance policies for the limits and coverage so required. Such surety and insurance companies shall also meet such additional requirements and qualifications as may be provided in the Supplementary Conditions.
- 5.3.2 CONTRACTOR shall deliver to OWNER, with copies to each additional insured identified in the Supplementary Conditions, certificates of insurance (and other evidence of insurance requested by OWNER or any other additional insured) which CONTRACTOR is required to purchase and maintain accordance with paragraph 5.4. The certificates shall be reviewed and approved by OWNER prior to execution of the Agreement. OWNER shall have the right to request and obtain copies of any insurance policies required under paragraph 5.4 of the General Conditions. The completed certificates of insurance shall be sent to: City of Louisville, 749 Main Street, Louisville, Colorado 80027, ATTN: City Engineer.

CONTRACTOR's Liability Insurance

- 5.4
- (a) CONTRACTOR agrees to procure and maintain, at its own cost, a policy or policies of insurance sufficient to insure against all liability, claims, demands, and other obligations assumed by CONTRACTOR pursuant to paragraphs 6.12, 6.16, 6.31, 6.32 and 6.33, and 6.5 in addition to any other insurance requirements imposed by the Contract Documents or by law. CONTRACTOR shall not be relieved of any liability, claims, demands, or other obligations assumed pursuant to paragraphs 6.12, 6.16, 6.31, and 6.33 by reason of its failure to procure or maintain insurance, or by reason of its failure to procure or maintain insurance in sufficient amounts, durations, or types.
 - (b) CONTRACTOR shall procure and maintain, and shall cause any Subcontractor or Supplier of CONTRACTOR to procure and maintain or insure the activity of his Subcontractors and Suppliers in his own policy, the minimum insurance coverages listed below. Such coverages shall be procured and maintained with forms and insurers acceptable to OWNER. All coverages shall be continuously maintained from the date of commencement of the Work to cover all liability, claims, demands, and other obligations assumed by CONTRACTOR pursuant to paragraphs 6.31 and 6.33. In the case of any claims-made policy, the necessary retroactive dates and extended reporting periods shall be procured to maintain such continuous coverage.
 - (1) Workers' Compensation insurance to cover obligations imposed by the Workers' Compensation Act of Colorado and any other applicable laws for any employee engaged in the performance of Work under this contract, and Employers' Liability insurance with minimum limits of FIVE HUNDRED THOUSAND DOLLARS (\$500,000) each accident, FIVE HUNDRED THOUSAND DOLLARS (\$500,000) disease - policy limit, and FIVE HUNDRED THOUSAND DOLLARS (\$500,000) disease - each employee. Evidence of qualified self-insured status may be substituted for the Workers' Compensation requirements of this paragraph.
 - (2) Comprehensive General Liability insurance with minimum combined single limits of ONE MILLION DOLLARS (\$1,000,000) each occurrence and TWO MILLION DOLLARS (\$2,000,000) aggregate. The policy shall be applicable to all premises and operations. The policy shall include coverage for bodily injury, broad form property damage (including completed operations), personal injury (including coverage for contractual and employee acts), blanket contractual, independent contractors, products, and completed operations. The policy shall include coverage for explosion, collapse, and underground hazards. The policy shall contain a severability of interests' provision.
 - (3) Comprehensive Automobile Liability insurance with minimum combined single limits for bodily injury and property damage of not less than ONE MILLION DOLLARS (\$1,000,000) each occurrence and ONE MILLION DOLLARS (\$1,000,000) aggregate with respect to each of CONTRACTOR's owned, hired or non-owned vehicles assigned to or used in performance of the services. The policy shall contain a severability of interests' provision.
 - (4) CONTRACTOR shall provide and maintain builder's risk insurance upon the entire project equal to one hundred percent (100%) of the insurable value thereof. Such insurance shall cover any and all physical damage including, without limitation, damage caused by fire, vandalism, malicious mischief, blasting, excessive surface

runoff or storm water, high winds, and other occurrences covered in a standard extended coverage endorsement. The policy shall remain in effect until the Work is accepted as substantially complete.

- (c) The policy required by paragraph (2) above, by paragraph (3) and by (4) above shall be endorsed to include OWNER, ENGINEER and its consultants, and each of their officers, agents, and employees as additional insureds. Every policy required above shall be primary insurance, and any insurance carried by OWNER, its officers, or its employees, shall be excess and not contributory insurance to that provided by CONTRACTOR. No additional insured endorsement to the policy required by paragraph (1) above shall contain any exclusion for bodily injury or property damage arising from completed operations. CONTRACTOR shall be solely responsible for any deductible losses under any policy required above.
- (d) The certificate of insurance provided to OWNER shall be completed by CONTRACTOR's insurance agent as evidence that policies providing the required coverages, conditions, and minimum limits are in full force and effect, and shall be reviewed and approved by OWNER prior to commencement of the contract.
- (e) Failure on the part of CONTRACTOR to procure or maintain policies providing the required coverages, conditions, and minimum limits shall constitute a material breach of contract upon which OWNER may immediately terminate this contract, or at its discretion may procure or renew any such policy or any extended reporting period thereto and may pay any and all premiums in connection therewith, and all monies so paid by OWNER shall be repaid by CONTRACTOR to OWNER upon demand, or OWNER may offset the cost of the premiums against any monies due to CONTRACTOR from OWNER.
- (f) OWNER reserves the right to request and receive a certified copy of any policy and any endorsement thereto.
- (g) The parties hereto understand and agree that OWNER, the City of Louisville, is relying on, and does not waive or intend to waive by any provision of this contract, the monetary limitations (presently \$150,000 per person and \$600,000 per occurrence) or any other rights, immunities, and protections provided by the Colorado Governmental Immunity Act, § 24-10-101 et seq., 10 C.R.S., as from time to time amended, or otherwise available to the City of Louisville, its officers, or its employees.

OWNER's Liability Insurance

- 5.5 In addition to the insurance required to be provided by CONTRACTOR under paragraph 5.4, OWNER, at OWNER's option, may purchase and maintain at OWNER's expense OWNER's own liability insurance as will protect OWNER against claims which may arise from operations under the Contract Documents.

Property Insurance

- 5.6 OWNER shall be responsible for maintaining its own property insurance and, at its option, may maintain such insurance as will protect it against claims which may arise from operations under the Contract Documents.

Article 6. CONTRACTOR's Responsibilities

Supervision and Superintendence

- 6.1 CONTRACTOR shall supervise, inspect, and direct the Work competently and efficiently, devoting such attention thereto and applying such skills and expertise as may be necessary to perform the Work in accordance with the Contract Documents. CONTRACTOR shall be solely responsible for the means, methods, techniques, sequences, and procedures of construction, but CONTRACTOR shall not be responsible for the negligence of others in the design or specification of a specific means, method, technique, sequence, or procedure of construction which is shown or indicated in and expressly required by the Contract Documents. CONTRACTOR shall be responsible to see that the completed Work complies accurately with the Contract Documents.
- 6.2 CONTRACTOR shall keep on the Work at all times during its progress a competent resident superintendent, who shall not be replaced without written notice to OWNER and ENGINEER except under extraordinary circumstances. The superintendent will be CONTRACTOR's representative at the site and shall have authority to act on behalf of CONTRACTOR. All communications to the superintendent shall be as binding as if given to CONTRACTOR.

Labor, Materials, and Equipment

- 6.3 CONTRACTOR shall provide competent, suitably qualified personnel to survey, layout, and construct the Work as required by the Contract Documents. CONTRACTOR shall at all times maintain good discipline and order at the site. Except as otherwise required for the safety or protection of persons or the Work or property at the site or adjacent thereto, and except as otherwise indicated in the Contract Documents, all Work at the site shall be performed during regular working hours and CONTRACTOR will not permit overtime work or the performance of Work on Saturday, Sunday or any legal holiday without OWNER's written consent given after prior written notice to ENGINEER. No extra payment will be paid to CONTRACTOR by OWNER due to labor overtime or other increased costs of performing the Work on Saturdays, Sundays, OWNER-observed holidays, or at night. Should CONTRACTOR desire to work on Saturdays, Sundays, OWNER-observed holidays, or at night between the hours of 5:00 p.m. and 7:00 a.m. on **Contract Days** CONTRACTOR shall submit a written request to ENGINEER 24 hours prior. If approval is given by ENGINEER to CONTRACTOR for authorized overtime work, ENGINEER and ENGINEER's authorized personnel will charge overtime and other incidental administrative expenses necessary for performing inspections on Saturdays, Sundays, OWNER-observed holidays, or at night between the hours of 5:00 p.m. and 7:00 a.m., CONTRACTOR will be responsible to pay for all such rates and charges, and shall not be granted a Contract Price increase for such charges. Overtime and other incidental administrative expenses for ENGINEER and ENGINEER's authorized personnel are as follows:

DESCRIPTION	HOURLY RATE
Engineer	\$60.00
Construction Inspector	\$45.00
Operations Supervisor	\$45.00
Maintenance Worker	\$30.00
Clerical	\$25.00
Vehicle	\$15.00

- 6.4 Unless otherwise specified in the General Requirements, CONTRACTOR shall furnish and assume full responsibility for all materials, equipment, labor, transportation, construction equipment and machinery, tools, appliances, fuel, power, light, heat, telephone, water, sanitary facilities, temporary facilities, and all other facilities and incidentals necessary for the furnishing, performance, testing, start-up, and completion of the Work.
- 6.5 All materials and equipment shall be of good quality and new, except as otherwise provided in the Contract Documents. All warranties and guarantees specifically called for by the Specifications shall expressly run to the benefit of OWNER. If required by ENGINEER, CONTRACTOR shall furnish satisfactory evidence (including reports of required tests) as to the kind and quality of materials and equipment. All materials and equipment shall be applied, installed, connected, erected, used, cleaned, and conditioned in accordance with instructions of the applicable Supplier, except as otherwise provided in the Contract Documents.

Progress Schedule

- 6.6 CONTRACTOR shall adhere to the progress schedule established in accordance with paragraph 2.8 as it may be adjusted from time to time as provided below:
- 6.6.1 CONTRACTOR shall submit to ENGINEER for acceptance (to the extent indicated in paragraph 2.8) proposed adjustments in the progress schedule that will not change the Contract Times (or Milestones). Such adjustments will conform generally to the progress schedule then in effect and additionally will comply with any provisions of the General Requirements applicable thereto.
- 6.6.2 Proposed adjustments in the progress schedule that will change the Contract Times (or Milestones) shall be submitted in accordance with the requirements of paragraph 12.1. Such adjustments may only be made by a Change Order or Written Amendment in accordance with Article 12.

Substitutes and "Or-Equal" Items

- 6.7
- 6.7.1 Whenever an item of material or equipment is specified or described in the Contract Documents by using the name of a proprietary item or the name of a particular Supplier, the specification or description is intended to establish the type, function, and quality required. Unless the specification or description contains or is followed by words reading that no like, equivalent, or "or-equal" item or no substitution is permitted, other items of material or equipment of

other Suppliers may be accepted by ENGINEER under the following circumstances:

“Or-Equal”

6.7.1.1 If in ENGINEER's sole discretion an item of material or equipment proposed by CONTRACTOR is functionally equal to that named and sufficiently similar so that no change in related Work will be required, it may be considered by ENGINEER as an "or-equal" item, in which case review and approval of the proposed item may, in ENGINEER's sole discretion, be accomplished without compliance with some or all of the requirements for acceptance of proposed substitute items.

Substitute Items

6.7.1.2 If in ENGINEER's sole discretion an item of material or equipment proposed by CONTRACTOR does not qualify as an "or-equal" item under subparagraph 6.7.1.1, it will be considered a proposed substitute item. CONTRACTOR shall submit sufficient information as provided below to allow ENGINEER to determine that the item of material or equipment proposed is essentially equivalent to that named and an acceptable substitute therefor. The procedure for review by ENGINEER will include the following as supplemented in the General Requirements and as ENGINEER may decide is appropriate under the circumstances. Requests for review of proposed substitute items of material or equipment will not be accepted by ENGINEER from anyone other than CONTRACTOR. If CONTRACTOR wishes to furnish or use a substitute item of material or equipment, CONTRACTOR shall first make written application to ENGINEER for acceptance thereof, certifying that the proposed substitute will perform adequately the functions and achieve the results called for by the general design, be similar in substance to that specified and be suited to the same use as that specified. The application will state the extent, if any, to which the evaluation and acceptance of the proposed substitute will prejudice CONTRACTOR's achievement of Substantial Completion on time, whether or not acceptance of the substitute for use in the Work will require a change in any of the Contract Documents (or in the provisions of any other direct contract with OWNER for work on the Project) to adapt the design to the proposed substitute and whether or not incorporation or use of the substitute in connection with the Work is subject to payment of any license fee or royalty. All variations of the proposed substitute from that specified will be identified in the application and available maintenance, repair, and replacement service will be indicated. The application will also contain an itemized estimate of all costs or credits that will result directly or indirectly from acceptance of such substitute, including costs of redesign and claims of other contractors affected by the resulting change, all of which will be considered

by ENGINEER in evaluating the proposed substitute. ENGINEER may require CONTRACTOR to furnish additional data about the proposed substitute.

CONTRACTOR's Expense

6.7.1.3 All data to be provided by CONTRACTOR in support of any proposed "or-equal" or substitute item will be at CONTRACTOR's expense.

Substitute Construction Methods or Procedures

6.7.2 If a specific means, method, technique, sequence, or procedure of construction is shown or indicated in and expressly required by the Contract Documents, CONTRACTOR may furnish or utilize a substitute means, method, technique, sequence, or procedure of construction acceptable to ENGINEER. CONTRACTOR shall submit sufficient information to allow ENGINEER, in ENGINEER's sole discretion, to determine that the substitute proposed is equivalent to that expressly called for by the Contract Documents. The procedure for review by ENGINEER will be similar to that provided in subparagraph 6.7.1.2.

ENGINEER's Evaluation

6.7.3 ENGINEER will be allowed a reasonable time within which to evaluate each proposal or submittal made pursuant to paragraphs 6.7.1.2 and 6.7.2. ENGINEER will be the sole judge of acceptability. No "or-equal" or substitute will be ordered, installed, or utilized without ENGINEER's prior written acceptance, which will be evidenced by either a Change Order or an approved Shop Drawing. OWNER may require CONTRACTOR to furnish at CONTRACTOR's expense a special performance guarantee or other surety with respect to any "or-equal" or substitute. ENGINEER will record time required by ENGINEER and ENGINEER's Consultants in evaluating substitutes proposed or submitted by CONTRACTOR pursuant to paragraphs 6.7.1.2 and 6.7.2 and in making changes in the Contract Documents (or in the provisions of any other direct contract with OWNER for work on the Project) occasioned thereby. Whether or not ENGINEER accepts a substitute item so proposed or submitted by CONTRACTOR, CONTRACTOR shall reimburse OWNER for the charges of ENGINEER and ENGINEER's Consultants for evaluating each such proposed substitute item.

Concerning Subcontractors, Suppliers, and Others

6.8

6.8.1 CONTRACTOR shall not employ any Subcontractor, Supplier, or other person or organization, whether initially or as a substitute, against whom OWNER or ENGINEER may have reasonable objection. CONTRACTOR shall not be required to employ any Subcontractor, Supplier, or other person or organization to furnish or perform any of the Work against whom CONTRACTOR has reasonable objection.

6.8.2 The Contract Documents require the identity of certain Subcontractors, Suppliers, or other persons or organizations (including those who are to furnish the principal items of materials or equipment) to be submitted to OWNER with the Bid in the Bid Form prior to the Effective Date of the Agreement for

acceptance by OWNER and ENGINEER, and if CONTRACTOR has submitted a list thereof in accordance with the Contract Documents, OWNER's or ENGINEER's acceptance (either in writing or by failing to make written objection thereto by the date indicated for acceptance or objection in Contract Documents) of any such Subcontractor, Supplier, or other person or organization so identified may be revoked on the basis of reasonable objection after due investigation, in which case CONTRACTOR shall submit an acceptable substitute. No acceptance by OWNER or ENGINEER of any such Subcontractor, Supplier, or other person or organization shall constitute a waiver of any right of OWNER or ENGINEER to reject defective Work.

- 6.8.3 Subletting of Contract. CONTRACTOR shall not sublet, sell, transfer, assign, or dispose of the Contract or Contracts, or any portion thereof without written consent of ENGINEER. CONTRACTOR will be permitted to sublet a portion of the Contract, however, CONTRACTOR's organization shall perform work amounting to not less than 50% of the total contract cost.

The calculation of the percentage of subcontracted work shall be based on the prime contract unit prices rather than subcontract unit prices. Proportional value for a subcontracted partial contract item shall be verified by ENGINEER. For the purpose of calculating the value of subcontracted work, the cost of procuring materials and manufactured products can be included in either the prime contract or subcontract. However, when a firm both sells material to a prime contractor and performs the work of incorporating the materials into the project, these two phases shall be considered in combination and as constituting a single subcontract.

Subcontracts, or transfer of Contract shall not release CONTRACTOR of liability under the Contract and bonds.

- 6.8.4 CONTRACTOR shall be fully responsible to OWNER and ENGINEER for all acts and omissions of the Subcontractors. Suppliers and other persons and organizations performing or furnishing any of the Work under a direct or indirect contract with CONTRACTOR just as CONTRACTOR is responsible for CONTRACTOR's own acts and omissions. OWNER or ENGINEER may furnish to any such Subcontractor, Supplier, or other person or organization, to the extent practicable, evidence of amounts paid to CONTRACTOR in accordance with CONTRACTOR's Applications for Payment. Nothing in the Contract Documents shall create for the benefit of any such Subcontractor, Supplier, or other person or organization any contractual relationship between OWNER or ENGINEER and any such Subcontractor, Supplier, or other person or organization, nor shall it create any obligation on the part of OWNER or ENGINEER to pay or to see to the payment of any moneys due any such Subcontractor, Supplier, or other person or organization except as may otherwise be required by Laws and Regulations.

- 6.8.5 CONTRACTOR shall be solely responsible for scheduling and coordinating the Work of Subcontractors, Suppliers, and other persons and organizations performing or furnishing any of the Work under a direct or indirect contract with CONTRACTOR. CONTRACTOR shall require all Subcontractors, Suppliers,

and such other persons and organizations performing or furnishing any of the Work to communicate with ENGINEER through CONTRACTOR.

- 6.9 The divisions and sections of the Specifications and the identifications of any Drawings shall not control CONTRACTOR in dividing the Work among Subcontractors or Suppliers or delineating the Work to be performed by any specific trade.
- 6.10 All Work performed for CONTRACTOR by a Subcontractor or Supplier will be pursuant to an appropriate agreement between CONTRACTOR and the Subcontractor or Supplier, which specifically binds the Subcontractor or Supplier to the applicable terms and, conditions of the Contract Documents for the benefit of OWNER and ENGINEER.

Patent Fees and Royalties

- 6.11 CONTRACTOR shall pay all license fees and royalties and assume all costs incident to the use in the performance of the Work or the incorporation in the Work of any invention, design, process, product, or device which is the subject of patent rights or copyrights held by others. If a particular invention, design, process, product, or device is specified in the Contract Documents for use in the performance of the Work and if to the actual knowledge of OWNER or ENGINEER its use is subject to patent rights or copyrights calling for the payment of any license fee or royalty to others, the existence of such rights shall be disclosed by OWNER in the Contract Documents. To the fullest extent permitted by Laws and Regulations, CONTRACTOR shall indemnify and hold harmless OWNER, ENGINEER, ENGINEER's Consultants and the officers, directors, employees, agents, and other consultants of each and any of them from and against all claims, costs, losses, and damages arising out of or resulting from any infringement of patent rights or copyrights incident to the use in the performance of the Work or resulting from the incorporation in the Work of any invention, design, process, product, or device not specified in the Contract Documents.

Permits

- 6.12 Unless otherwise provided in the Supplementary Conditions, CONTRACTOR shall obtain and pay for all construction permits and licenses. OWNER shall assist CONTRACTOR, when necessary, in obtaining such permits and licenses. CONTRACTOR shall pay all governmental charges and inspection fees necessary for the prosecution of the Work, which are applicable at the time of opening of Bids, or, if there are no Bids, on the Effective Date of the Agreement. CONTRACTOR shall pay all charges of utility owners for connections to the Work, and OWNER shall pay all charges of such utility owners for capital costs related thereto such as plant investment fees.
 - 6.12.1 Prior to the commencement date for the Work set forth in the Notice to Proceed, CONTRACTOR, and all subcontractors shall be or shall become a contractor licensed in accordance with the applicable ordinance of the City of Louisville, Colorado.
 - 6.12.2 If water is required for the project, CONTRACTOR shall obtain a bulk water permit from the City of Louisville, Public Works Department in accordance with the permit requirements.

- 6.12.3 CONTRACTOR shall obtain a Right-of-Way Permit from the City of Louisville, Public Works Department for all Work to be completed within the City right-of-way.
- 6.12.4 CONTRACTOR shall obtain and pay for all other necessary construction permits and licenses.

Laws and Regulations

6.13

- 6.13.1 CONTRACTOR shall give all notices and comply with all Laws and Regulations applicable to furnishing and performance of the Work. Except where otherwise expressly required by applicable Laws and Regulations, neither OWNER nor ENGINEER shall be responsible for monitoring CONTRACTOR's compliance with any Laws or Regulations.
- 6.13.2 If CONTRACTOR performs any Work knowing or having reason to know that it is contrary to Laws or Regulations, CONTRACTOR shall bear all claims, costs, losses, and damages caused by, arising out of, or resulting therefrom; however, it shall not be CONTRACTOR's primary responsibility to make certain that the Specifications and Drawings are in accordance with Laws and Regulations, but this shall not relieve CONTRACTOR of CONTRACTOR's obligations under paragraph 3.3.2.

Taxes

- 6.14 CONTRACTOR shall pay all sales, consumer, use, and other similar taxes required to be paid by CONTRACTOR in accordance with the Laws and Regulations of the place of the Project, which are applicable during the performance of the Work. City of Louisville municipal taxes shall be waived upon application for and acceptance of "tax exemption".

CONTRACTOR shall apply for and receive a Certificate of Exemption from the Colorado Department of Revenue for construction materials to be physically incorporated into the Work. This Certificate of Exemption provides that CONTRACTOR shall neither pay nor include in his bid prices Sales and Use Taxes collected by the State of Colorado on those building and construction materials physically incorporated into the Work. Sales and Use Taxes of the State of Colorado, RTD, and the County are collected by the State of Colorado. All applicable Sales and Use Taxes (including State collected taxes) on any items other than construction and building materials physically incorporated into the Work are to be paid by CONTRACTOR and are to be included in the appropriate bid items. CONTRACTOR and any Subcontractor assume all liability for the nonpayment of taxes, or the payment of exempt taxes resulting from a failure to use the Certificate of Exemption required by this paragraph.

Use of Premises

- 6.15 CONTRACTOR shall confine construction equipment, the storage of materials and equipment, and the operations of workers to the site and land and areas identified in and permitted by the Contract Documents and other land and areas permitted by Laws and Regulations, rights-of-way, permits and easements, and shall not unreasonably encumber the premises with construction equipment or other materials or equipment. CONTRACTOR shall assume full

responsibility for any damage to any such land or area, or to the owner or occupant thereof or of any adjacent land or areas, resulting from the performance of the Work. Should any claim be made by any such owner or occupant because of the performance of the Work, CONTRACTOR shall promptly settle with such other party by negotiation or otherwise resolve the claim by arbitration or other dispute resolution proceeding or at law. CONTRACTOR shall, to the fullest extent permitted by Laws and Regulations, indemnify and hold harmless OWNER, ENGINEER, ENGINEER's Consultant, and anyone directly or indirectly employed by any of them from and against all claims, costs, losses, and damages arising out of or resulting from any claim or action, legal or equitable, brought by any such owner or occupant against OWNER, ENGINEER, or any other party indemnified hereunder to the extent caused by or based upon CONTRACTOR's performance of the Work.

- 6.16 During the progress of the Work, CONTRACTOR shall keep the premises free from accumulations of waste materials, rubbish, and other debris resulting from the Work. At the completion of the Work, CONTRACTOR shall remove all waste materials, rubbish, and debris from and about the premises as well as all tools, appliances, construction equipment and machinery, and surplus materials. CONTRACTOR shall leave the site clean and ready for occupancy by OWNER at Substantial Completion of the Work. CONTRACTOR shall restore to original condition all property not designated for alteration by the Contract Documents.
- 6.17 CONTRACTOR shall not load nor permit any part of any structure to be loaded in any manner that will endanger the structure, nor shall CONTRACTOR subject any part of the Work or adjacent property to stresses or pressures that will endanger it.

Record Documents

- 6.18 CONTRACTOR shall maintain in a safe place at the site one record copy of all Drawings, Specifications, Addenda, Written Amendments, Change Orders, Work Change Directives, Field Orders, and written interpretations and clarifications (issued pursuant to paragraph 9.4) in good order and annotated to show all changes made during construction. These record documents together with all approved Samples and a counterpart of all approved Shop Drawings will be available to ENGINEER for reference. Upon completion of the Work, these record documents, Samples and Shop Drawings will be delivered to ENGINEER for OWNER.

Safety and Protection

- 6.19 CONTRACTOR shall be responsible for initiating, maintaining, and supervising all safety precautions and programs in connection with the Work. CONTRACTOR shall take all necessary precautions for the safety of, and shall provide the necessary protection to prevent damage, injury, or loss to:
- 6.19.1 all persons on the Work site or who may be affected by the Work;
 - 6.19.2 all the Work and materials and equipment to be incorporated therein, whether in storage on or off the site; and
 - 6.19.3 other property at the site or adjacent thereto, including but not limited to trees, shrubs, lawns, walks, pavements, roadways, structures, fences, gates, ditches, utilities, and underground facilities not designated for removal, relocation, or replacement in and during the course of construction.

- 6.19.4 CONTRACTOR shall take all measures necessary to mitigate the impact of weather so that the project may continue on schedule. In no event shall OWNER be liable for extra costs incurred on materials and any part of the Work due to CONTRACTOR's failing to take all measures necessary protect the Work from weather and CONTRACTOR shall not be entitled to such claims. Also, no extension of the Contract Time shall be allowed if CONTRACTOR is able, notwithstanding the weather, to proceed with other Work of the Contract.

CONTRACTOR shall comply with all applicable Laws and Regulations of any public body having jurisdiction for safety of persons or property or to protect them from damage, injury, or loss; and shall erect and maintain all necessary safeguards for such safety and protection. CONTRACTOR shall notify owners of adjacent property and of Underground Facilities and utility owners when prosecution of the Work may affect them, and shall cooperate with them in the protection, removal, relocation, and replacement of their property. All damage, injury or loss to any property referred to in paragraph 6.20.2 or 6.20.3 caused, directly or indirectly, in whole or in part, by CONTRACTOR, any Subcontractor, Supplier, or any other person or organization directly or employed by any of them to perform or furnish any of the Work or anyone for whose acts any of them may be liable, shall be remedied by CONTRACTOR. CONTRACTOR's duties and responsibilities for safety and for protection of the work shall continue until such time as all the Work is completed and ENGINEER has issued a notice to OWNER and CONTRACTOR in accordance with paragraph 14.13 that the Work is acceptable (except as otherwise expressly provided in connection with Substantial Completion).

Safety Representative

- 6.20 CONTRACTOR shall designate a qualified and experienced safety representative at the site whose duties and responsibilities shall be the prevention of accidents and the maintaining and supervising of safety precautions and programs.

Hazard Communication Programs

- 6.21 CONTRACTOR shall be responsible for coordinating any exchange of material safety data sheets or other hazard communication information required to be made available to or exchanged between or among employers at the site in accordance with Laws or Regulations.

Emergencies

- 6.22 In emergencies affecting the safety or protection of persons or the Work or property at the site or adjacent thereto, CONTRACTOR, without special instruction or authorization from OWNER or ENGINEER, is obligated to act to prevent threatened damage, injury or loss. CONTRACTOR shall give ENGINEER prompt written notice if CONTRACTOR believes that any significant changes in the Work or variations from the Contract Documents have been caused thereby. If ENGINEER determines that a change in the Contract Documents is required because of the action taken by CONTRACTOR in response to such an emergency, a Work Change directive or Change order will be issued to document the consequences of such action.

Shop Drawings and Samples

6.23

- 6.23.1 After checking and verifying all field measurements, CONTRACTOR shall submit to ENGINEER for review and approval in accordance with the accepted schedule

of shop drawings and sample submittal (see paragraph 2.8), three copies (or at ENGINEER's option, one reproducible copy) of all shop drawings, which shall have been checked and approved by CONTRACTOR. The data shown on the Shop Drawings will be complete with respect to quantities, dimensions, specified performance and design criteria, materials, and similar data to show ENGINEER the materials and equipment CONTRACTOR proposes to provide and to enable ENGINEER to review the information for the limited purposes required by paragraph 6.26.

- 6.23.2 CONTRACTOR shall also submit Samples to ENGINEER for review and approval in accordance with said accepted schedule of Shop Drawings and Sample submittals. Each Sample will be identified clearly as to material, Supplier, pertinent data such as catalog numbers and the use for which intended and otherwise as ENGINEER may require to enable ENGINEER to review the submittal for the limited purposes required by paragraph 6.24. The numbers of each Sample to be submitted will be as specified in the Specifications.

Submittal Procedures

6.24

- 6.24.1 Before submitting each Shop Drawing or Sample, CONTRACTOR shall have determined and verified:
- 6.24.1.1 all field measurements, quantities, dimensions, specified performance criteria, installation requirements, materials, catalog numbers, and similar information with respect thereto;
 - 6.24.1.2 all materials with respect to intended use, fabrication, shipping, handling, storage, assembly, and installation pertaining to the performance of the Work, and
 - 6.24.1.3 all information relative to CONTRACTOR's sole responsibilities in respect of means, methods, techniques, sequences, and procedures of construction and safety precautions and programs incident thereto.

CONTRACTOR shall also have reviewed and coordinated each Shop Drawing or Sample with other Shop Drawings and Samples and with the requirements of the Work and the Contract Documents.

- 6.24.2 Each submittal will bear a stamp or specific written indication that CONTRACTOR has satisfied CONTRACTOR's obligations under the Contract Documents with respect to CONTRACTOR's review and approval of that submittal.
- 6.24.3 At the time of each submission, CONTRACTOR shall give ENGINEER specific written notice of such variations, if any, that the Shop Drawing or Sample submitted may have from the requirements of the Contract Documents, such notice to be in a written communication separate from the submittal; and, in

addition, shall cause a specific notation to be made on each Shop Drawing and Sample submitted to ENGINEER for review and approval of each such variation.

- 6.25 ENGINEER will review and approve Shop Drawings and Samples in accordance with the schedule of Shop Drawings and Sample submittals accepted by ENGINEER as required by paragraph 2.8. ENGINEER's review and approval will be only to determine if the items covered by the submittals will, after installation or incorporation in the Work, conform to the information given in the Contract Documents and be compatible with the design concept of the completed Project as a functioning whole as indicated by the Contract Documents. ENGINEER's review and approval will not extend to means, methods, techniques, sequences, or procedures of construction (except where a particular means, method, technique, sequence, or procedure of construction is specifically and expressly called for by the Contract documents) or to safety precautions or programs incident thereto. The review and approval of a separate item as such will not indicate approval of the assembly in which the item functions. CONTRACTOR shall make corrections required by ENGINEER and shall return the required number of corrected copies of Shop Drawings and submit as required new Samples for review and approval. CONTRACTOR shall direct specific attention in writing to revisions other than the corrections called for by ENGINEER on previous submittals.
- 6.26 ENGINEER's review and approval of Shop Drawings or Samples shall not relieve CONTRACTOR from responsibility for any variation from the requirements of the Contract Documents unless CONTRACTOR has in writing called ENGINEER's attention to each such variation at the time of submission as required by paragraph 6.24.3 and ENGINEER has given written approval of each such variation by specific written notation thereof incorporated in or accompanying the Shop Drawing or Sample approval; nor will any approval by ENGINEER relieve CONTRACTOR from responsibility for complying with the requirements of paragraph 6.24.1.
- 6.27 Where a Shop Drawing or Sample is required by the Contract Documents or the schedule of Shop Drawings and Sample submissions accepted by ENGINEER as required by paragraph 2.8, any related Work performed prior to ENGINEER's review and approval of the pertinent submittal will be at the sole expense and responsibility of CONTRACTOR.

Continuing the Work

- 6.28 CONTRACTOR shall carry on the Work and adhere to the progress schedule during all disputes or disagreements with OWNER. No Work shall be delayed or postponed pending resolution of any disputes or disagreements, except as permitted by paragraph 15.5 or as OWNER and CONTRACTOR may otherwise agree in writing.

CONTRACTOR's General Warranty and Guarantee

6.29

- 6.29.1 CONTRACTOR warrants and guarantees to OWNER, ENGINEER, and ENGINEER's Consultants that all Work will be in accordance with the Contract Documents and will not be **defective**. CONTRACTOR's warranty and guarantee hereunder excludes defects or damage caused by:

- 6.29.1.1 abuse, modification, or improper maintenance or operation by persons other than CONTRACTOR, Subcontractors, or Suppliers;
or

- 6.29.1.2 normal wear and tear under normal usage.
- 6.29.2 CONTRACTOR's obligation to perform and complete the Work in accordance with the Contract Documents shall be absolute. None of the following will constitute an acceptance of Work that is not in accordance with the Contract Documents or a release of CONTRACTOR's obligation to perform the work in accordance with the Contract Documents:
- 6.29.2.1 observations by ENGINEER;
 - 6.29.2.2 recommendation of any progress or final payment by ENGINEER;
 - 6.29.2.3 the issuance of a certificate of Substantial Completion or any payment by OWNER to CONTRACTOR under the Contract Documents;
 - 6.29.2.4 use or occupancy of the Work or any part thereof by OWNER;
 - 6.29.2.5 any acceptance by OWNER or any failure to do so;
 - 6.29.2.6 any review and approval of a Shop Drawing or Sample submittal or the issuance of a notice of acceptability by ENGINEER pursuant to paragraph 14.13;
 - 6.29.2.7 any inspection, test, or approval by others; or
 - 6.29.2.8 any correction of **defective** Work by OWNER.
- 6.29.3 CONTRACTOR warrants that, unless otherwise specified in the Contract Documents, the materials and equipment installed in the Work will be new, merchantable, and fit for the purpose for which they are intended, and that the Work will be performed in a workmanlike manner. CONTRACTOR also warrants the workers who perform the Work will be sufficiently skilled to produce a high quality product which is free of blemishes (surface defects) and flaws (internal defects).
- CONTRACTOR is under a continuing duty to warn OWNER and ENGINEER of any possible defect in the design of the Work and materials incorporated in the Work and against potentially unsafe uses of products incorporated in the Work which may cause personal injury or property damage as soon as CONTRACTOR discovers the possible defect or has notice that the product may be unsafe. CONTRACTOR's duty under this paragraph shall be continuing and shall not expire when OWNER accepts the Work or when CONTRACTOR's guarantee expires. If CONTRACTOR fails to warn OWNER of a design or product defect of which CONTRACTOR is aware, and if personal or property damage thereafter results from such design or product defect, CONTRACTOR shall be liable jointly and severally with any other party responsible at law for all damages resulting from such defect.

Indemnification

6.30

CONTRACTOR agrees to indemnify and hold harmless OWNER (City of Louisville), ENGINEER, ENGINEER's consultants, and their officers, employees, agents, and insurers, from and against all liability, claims, and demands, on account of injury, loss, or damage, including without limitation claims arising from bodily injury, personal injury, sickness, disease, death, property loss or damage, or any other loss of any kind whatsoever, which arise out of or are in any manner connected with this contract, if such injury, loss, or damage is caused in whole or in part by, or is claimed to be caused in whole or in part by, the act, omission, error, professional error, mistake, negligence, or other fault of CONTRACTOR, any Subcontractor of CONTRACTOR, or any officer, employee, representative, or agent of CONTRACTOR or of any Subcontractor of CONTRACTOR, or which arise out of any workers' compensation claim of any employee of CONTRACTOR or of any employee of any subcontractor of CONTRACTOR. CONTRACTOR agrees to investigate, handle, respond to, and to provide defense for and defend against, any such liability, claims or demands at the sole expense of CONTRACTOR. CONTRACTOR also agrees to bear all other costs and expenses related thereto, including court costs and attorney fees, whether or not any such liability, claims, or demands alleged are groundless, false, or fraudulent.

- 6.31 In any and all claims against OWNER or ENGINEER or any of their respective consultants, agents, officers, directors, or employees by any employee (or the survivor or personal representative of such employee) of CONTRACTOR, any Subcontractor, any Supplier, any person or organization directly or indirectly employed by any of them to perform or furnish any of the Work, or anyone for whose acts any of them may be liable, the indemnification obligation under paragraph 6.30 shall not be limited in any way by any limitation on the amount or type of damages, compensation or benefits payable by or for CONTRACTOR or any such Subcontractor, Supplier, or other person or organization under workers' compensation acts, disability benefit acts, or other employee benefit acts.

Survival of Obligations

- 6.32 All representations, indemnifications, warranties, and guarantees made in, required by, or given in accordance with the Contract Documents, as well as all continuing obligations indicated in the Contract Documents, will survive final payment, completion, and acceptance of the work and termination or completion of the Agreement.

Article 7. Other Work

Related Work at Site

- 7.1 OWNER may perform other work related to the Project at the site by OWNER's own forces or let other direct contracts therefor which shall contain General Conditions similar to these, or have other work performed by utility owners. If the fact that such other work is to be performed was not noted in the Contract Documents, then: (i) written notice thereof will be given to CONTRACTOR prior to starting any such other work, and (ii) CONTRACTOR may make a claim therefor as provided in Articles 11 and 12 if CONTRACTOR believes that such performance will involve additional expense to CONTRACTOR or requires additional time and the parties are unable to agree as to the amount or extent thereof.

- 7.2 CONTRACTOR shall afford each other contractor who is a party to such a direct contract and each utility owner (and OWNER, if OWNER is performing the additional work with OWNER's employees) proper and safe access to the site and a reasonable opportunity for the introduction and storage of materials and equipment and the execution of such other work and shall properly connect and coordinate the Work with theirs. Unless otherwise provided in the Contract Documents, CONTRACTOR shall do all cutting, fitting, and patching of the Work that may be required to make its several parts come together properly and integrate with such other work. CONTRACTOR shall not endanger any work of others by cutting, excavating or otherwise altering their work and will only cut or alter their work with the written consent of ENGINEER and the others whose work will be affected. The duties and responsibilities of CONTRACTOR under this paragraph are for the benefit of such utility owners and other contractors to the extent that there are comparable provisions for the benefit of CONTRACTOR in said direct contracts between OWNER and such utility owners and other contractors.
- 7.3 If the proper execution or results of any part of CONTRACTOR's work depends upon work performed by others under this Article 7, CONTRACTOR shall inspect such other work and promptly report to ENGINEER in writing any delays, defects, or deficiencies in such other work that render it unavailable or unsuitable for the proper execution and results of CONTRACTOR's Work. CONTRACTOR's failure to so report will constitute an acceptance of such other work as fit and proper for integration with CONTRACTOR's Work except for latent or non-apparent defects and deficiencies in such other work.

Coordination

- 7.4 Unless otherwise provided in the Supplementary Conditions, OWNER shall have sole authority and responsibility in respect of such coordination.

Should CONTRACTOR cause damage to the Work or property of any separate CONTRACTOR at the site, or should any claim arising out of CONTRACTOR's performance of the Work at the site be made by any separate contractor against CONTRACTOR, OWNER, ENGINEER, or any other person, CONTRACTOR shall promptly attempt to settle with such other contractor by agreement, or to otherwise resolve the dispute by arbitration or at law. CONTRACTOR shall, to the fullest extent permitted by Laws, and Regulations, indemnify and hold OWNER and ENGINEER harmless from and against all claims, damages, losses, and expenses (including, but not limited to, fees of engineers, architects, attorneys, and other professionals and court and arbitration costs) arising directly, indirectly, or consequentially out of any action, legal or equitable, brought by any separate contractor against OWNER or ENGINEER to the extent based on a claim arising out of CONTRACTOR's performance of the Work. Should a separate contractor cause damage to the Work or property of CONTRACTOR or should the performance of Work by any separate contractor at the site give rise to any other claim, CONTRACTOR shall not institute any action, legal or equitable, against OWNER or ENGINEER or permit any action against any of them to be maintained and continued in its name or for its benefit in any court or before any arbiter which seeks to impose liability on or to recover damages from OWNER or ENGINEER on account of any such damage or claim. If CONTRACTOR is delayed at any time in performing or furnishing Work by any act or neglect of a separate contractor and OWNER and CONTRACTOR are unable to agree as to the extent of any adjustment in Contract Time attributable thereto, CONTRACTOR may make a claim for an extension of time in accordance with Article 12. An extension of the Contract Time shall be CONTRACTOR's exclusive remedy with respect to OWNER and ENGINEER for any delay, disruption, interference, or hindrance cause by any

separate contractor. This paragraph does not prevent recovery from OWNER or ENGINEER for activities that are their respective responsibilities.

Article 8. Owner's Responsibilities

- 8.1 Except as otherwise provided in these General Conditions, OWNER shall issue all communications to CONTRACTOR through ENGINEER.
- 8.2 In case of termination of the employment of ENGINEER, OWNER shall appoint an engineer whose status under the Contract Documents shall be that of the former engineer.
- 8.3 OWNER shall furnish the data required of OWNER under the Contract documents promptly and shall make payments to CONTRACTOR promptly when they are due as provided in paragraphs 14.4 and 14.13.
- 8.4 OWNER's duties in respect of providing lands and easements and providing engineering surveys to establish reference points are set forth in paragraphs 4.1 and 4.4.
- 8.5 OWNER is obligated to execute Change Orders as indicated in paragraph 10.4.
- 8.6 OWNER's responsibility in respect of certain inspections, tests, and approvals is set forth in paragraph 13.4.
- 8.7 In connection with OWNER's right to stop Work or suspend Work, see paragraphs 13.10 and 15.1. Paragraph 15.2 deals with OWNER's right to terminate services of CONTRACTOR under certain circumstances.
- 8.8 OWNER shall not supervise, direct, or have control or authority over, nor be responsible for, CONTRACTOR's means, methods, techniques, sequences, or procedures of construction or the safety precautions and programs incident thereto, or for any failure of CONTRACTOR to comply with Laws and Regulations applicable to the furnishing or performance of the Work. OWNER will not be responsible for CONTRACTOR's failure to perform or furnish the Work in accordance with the Contract Documents.
- 8.9 OWNER's responsibility in respect of undisclosed Asbestos, PCBs, Petroleum, Hazardous Waste, or Radioactive Materials uncovered or revealed at the site is set forth in paragraph 4.5.
- 8.10 If and to the extent OWNER has agreed to furnish CONTRACTOR reasonable evidence that financial arrangements have been made to satisfy OWNER's obligations under the Contract Documents, OWNER's responsibility in respect thereof will be as set forth in the Supplementary Conditions.

Article 9. Engineer's Status During Construction

OWNER's Representative

- 9.1 ENGINEER will be OWNER's representative during the construction period. The duties and responsibilities and the limitations of authority of ENGINEER as OWNER's representative during

construction are set forth in the Contract Documents and shall not be extended without written consent of OWNER and ENGINEER.

Visits to Site

- 9.2 ENGINEER will make visits to the site at intervals appropriate to the various stages of construction as ENGINEER deems necessary in order to observe as an experienced and qualified design professional the progress that has been made and the quality of the various aspects of CONTRACTOR's executed Work. Based on information obtained during such visits and observations, ENGINEER will endeavor for the benefit of OWNER to determine, in general, if the Work is proceeding in accordance with the Contract Documents. ENGINEER will not be required to make exhaustive or continuous onsite inspections to check the quality or quantity of the Work. ENGINEER's efforts will be directed toward providing for OWNER a greater degree of confidence that the completed Work will conform generally to the Contract Documents. On the basis of such visits and onsite observations, ENGINEER will keep OWNER informed of the progress of the Work and will endeavor to guard OWNER against **defective** Work. ENGINEER's visits and onsite observations are subject to all the limitations on ENGINEER's authority and responsibility set forth in paragraph 9.13 and particularly, but without limitation, during or as a result of ENGINEER's onsite visits or observations of CONTRACTOR's work. ENGINEER will not supervise, direct, control, or have authority over or be responsible for CONTRACTOR's means, methods, techniques, sequences, or procedures of construction, or the safety precautions and programs incident thereto, or for any failure of CONTRACTOR to comply with Laws and Regulations applicable to the furnishing or performance of the Work.

Project Representative

- 9.3 ENGINEER will furnish a Resident Project Representative, assistants, and other field staff to assist ENGINEER in observing the performance of the Work of CONTRACTOR. The responsibilities and authority and limitations thereon of any such Resident Project Representative and assistants will be as provided in paragraph 9.13 and in the Supplementary Conditions. If OWNER designates another representative or agent to represent OWNER at the site who is not ENGINEER's Consultant, agent or employee, the responsibilities and authority and limitations thereon of such other person will be as provided in the Supplementary Conditions.

- 9.3.1 Resident Project Representative is ENGINEER's Agent and will act as directed by and under the supervision of ENGINEER and will confer with ENGINEER regarding his actions. His dealings in matters pertaining to the onsite Work will in general be with ENGINEER and CONTRACTOR keeping the ENGINEER advised as necessary. His dealings with Subcontractors will only be through or with the full knowledge and approval of CONTRACTOR.

Duties and Responsibilities

Resident Project Representative will:

Schedules

Review the progress schedule, schedule of Shop Drawing submittal, schedule of values and other schedules prepared by CONTRACTOR and consult with ENGINEER concerning acceptability.

Conferences and Meetings

Attend meetings with CONTRACTOR, such as preconstruction conferences, progress meetings and other job conferences, and other project-related meetings.

Liaison

Serve as ENGINEER's liaison with CONTRACTOR, working principally through CONTRACTOR's superintendent and assist him in understanding the intent of the Contract Documents. Assist ENGINEER in serving as OWNER's liaison with CONTRACTOR when CONTRACTOR's operations affect OWNER's onsite operations.

Assist in obtaining from ENGINEER additional details or information, when required for proper execution of the Work.

Shop Drawings and Samples

Record date of receipt of Shop Drawings and samples.

Receive samples, which are furnished at the site by CONTRACTOR for ENGINEER's review and notify ENGINEER of their availability for examination.

Advise ENGINEER and CONTRACTOR of the commencement of any Work requiring a Shop Drawing or sample submission if the submission has not been approved by ENGINEER.

Review of Work, Rejection of Defective Work, Inspections, and Tests

Conduct onsite observations of the Work in progress to assist ENGINEER in determining that the Work is proceeding in accordance with the Contract Documents.

Report to ENGINEER whenever he believes that any Work is unsatisfactory, faulty or defective, or does not conform to the Contract Documents, or has been damaged, or does not meet the requirements of any inspections, tests, or approvals required to be made; and advise ENGINEER when he believes Work should be corrected or rejected or should be uncovered for observation, or requires special testing, inspection, or approval.

Verify that tests, equipment, and systems startups and operating and maintenance training are conducted in presence of the appropriate personnel, and that CONTRACTOR maintains adequate records thereof; observe, record, and report to ENGINEER appropriate details relative to the test procedures and start-ups.

Accompany visiting inspectors representing public or other agencies having jurisdiction over the Project, record the results of these inspections and report to ENGINEER.

Interpretation of Contract Documents

Report to ENGINEER when clarifications and interpretations of the Contract Documents are needed and Transmit to CONTRACTOR clarification and interpretation of the Contract Documents as issued by ENGINEER.

Modifications

Consider and evaluate CONTRACTOR's suggestions for modification in Drawings or Specifications and report with his recommendations to ENGINEER. Transmit to CONTRACTOR decisions issued by ENGINEER.

Records

Maintain at the job site orderly files for correspondence, reports of job conferences, Shop Drawings and samples, reproductions or original Contract Documents including all Work Directive Changes, Addenda, Change Orders, Field Orders, additional Drawings issued subsequent to the execution of the Agreement, ENGINEER's clarifications and interpretations of the Contract Documents, progress reports, and other Project related documents.

Keep a diary, daily report form, or log book, recording hours on the job site, weather conditions, data relative to questions of Work Directive Changes, Change Orders, or changed conditions, list of job site visitors, daily activities, decisions, observations in general, and specific observations in more detail as in the case of observing test procedures.

Record names, addresses, and telephone numbers of all contractors, subcontractors, and major suppliers of equipment and materials.

Reports

Furnish ENGINEER periodic reports as required of progress of the Work and of CONTRACTOR's compliance with the progress schedule and schedule of Shop Drawings and sample submittal.

Consult with ENGINEER in advance of scheduled major tests, inspections or start of important phases of the Work.

Draft proposed Change Orders and Work Directive Changes, obtaining backup material from CONTRACTOR and recommend to ENGINEER Change Orders, Work Directive Changes, and Field Orders.

Report immediately to ENGINEER upon the occurrence of any accident.

Payment Requests

Review applications for payment with CONTRACTOR for compliance with the established procedure for their submission and forward with his recommendations to ENGINEER, noting particularly the relationship of the

payment requested to the schedule of values, Work completed and materials and equipment delivered at the site but not incorporated in the Work.

Certificates, Maintenance, and Operations Manuals

During the Course of Work verify that certifications, maintenance, and operation manuals and other data required to be assembled and furnished by CONTRACTOR are applicable to the items actually installed and in accordance with the Contract Documents, and have this material delivered to ENGINEER for review and forwarding to OWNER prior to final payment of the Work.

Completion

Before ENGINEER issues a Certificate of Substantial Completion, submit to CONTRACTOR a list of observed items requiring correction or completion.

Conduct final inspection in the company of ENGINEER and CONTRACTOR and prepare a final list of items to be corrected or completed.

Observe that all items on final list have been corrected or completed and make recommendations to ENGINEER concerning acceptance.

Limitation of Authority

Resident Project Representative shall not:

Authorize any deviations from the Contract Documents or accept any substitute materials or equipment, unless authorized by ENGINEER.

Exceed limitations of ENGINEER's authority as set forth in the Contract Documents.

Undertake any of the responsibilities of CONTRACTOR, Subcontractors, or CONTRACTOR's superintendent.

Advise on, or issue directions relative to or assume control over any aspect of the means, methods, techniques, sequences, or procedures for construction unless such is specifically called for in the Contract Documents.

Advise on or issue directions regarding or assume control over safety precautions and programs in connection with the Work.

Shall not accept Shop Drawings or sample submittals from anyone other than CONTRACTOR.

Authorize OWNER to occupy the Work in whole or in part.

Participate in specialized field or laboratory tests or inspections conducted by others except as specifically authorized by ENGINEER.

Clarifications and Interpretations

- 9.4 ENGINEER will issue with reasonable promptness such written clarifications or interpretations of the requirements of the Contract Documents (in the form of Drawings or otherwise) as ENGINEER may determine necessary, which shall be consistent with the intent of and reasonably inferable from Contract Documents. Such written clarifications and interpretations will be binding on OWNER and CONTRACTOR. If OWNER or CONTRACTOR believes that a written clarification or interpretation justifies an adjustment in the Contract Price or the Contract Times and the parties are unable to agree to the amount or extent thereof, if any, OWNER or CONTRACTOR may make a written claim therefor as provided in Article 11 or Article 12.

Authorized Variations in Work

- 9.5 ENGINEER may authorize minor variations in the work from the requirements of the Contract Documents which do not involve an adjustment in the Contract Price or the Contract Times and are compatible with the design concept of the completed Project as a functioning whole as indicated by the Contract Documents. These may be accomplished by a Field Order and will be binding on OWNER and also on CONTRACTOR who shall perform the Work involved promptly.

Rejecting Defective Work

- 9.6 ENGINEER will have authority to disapprove or reject Work which ENGINEER believes to be **defective**, or that ENGINEER believes will not produce a completed Project that conforms to the Contract Documents or that will prejudice the integrity of the design concept of the completed Project as a functioning whole as indicated by the Contract Documents. ENGINEER will also have authority to require special inspection or testing of the work as provided in paragraph 13.9, whether or not the work is fabricated, installed or completed.

Shop Drawings, Change Orders, and Payments

- 9.7 In connection with ENGINEER's authority as to Shop Drawings and Samples, see paragraphs 6.24 through 6.28 inclusive.
- 9.8 In connection with ENGINEER's authority as to Change Orders, see Articles 10, 11, and 12.
- 9.9 In connection with ENGINEER's authority as to Applications for Payment, see Article 14.

Determinations for Unit Prices

- 9.10 ENGINEER will have authority to determine the actual quantities and classifications of items of Unit Price Work performed by CONTRACTOR, and the written decisions of ENGINEER on such matters will be final, binding on OWNER and CONTRACTOR and not subject to appeal (except as modified by ENGINEER to reflect changed factual conditions).

Decisions on Disputes

- 9.11 ENGINEER will be the initial interpreter of the requirements of the Contract Documents and judge of the acceptability of the Work thereunder. Claims, disputes, and other matters relating to the acceptability of the Work or the interpretation of the requirements of the Contract Documents pertaining to the performance and furnishing of the Work and Claims under Articles

11 and 12 in respect of changes in the Contract Price or Contract Times will be referred initially to ENGINEER in writing with a request for a formal decision in accordance with this paragraph. Written notice of each such claim, dispute or other matter will be delivered by the claimant to ENGINEER and the other party to the Agreement promptly (but in no event later than fifteen days) after the start of the occurrence or event giving rise thereto, and written supporting data will be submitted to ENGINEER and the other party within thirty days after the start of such occurrence or event unless ENGINEER allows an additional period of time for the submission of additional or more accurate data in support of such claim, dispute or other matter. The opposing party shall submit any response to ENGINEER and the claimant within thirty days after receipt of the claimant's last submittal (unless ENGINEER allows additional time). ENGINEER will render a formal decision in writing within thirty days after receipt of the opposing party's submittal, if any, in accordance with this paragraph. ENGINEER's written decision on such claim, dispute or other matter will be final and binding upon OWNER and CONTRACTOR.

- 9.12 When functioning under paragraphs 9.10 and 9.11, ENGINEER will not show partiality to OWNER or CONTRACTOR and will not be liable in connection with any interpretation or decision rendered in good faith in such capacity. The rendering of a decision by ENGINEER pursuant to paragraphs 9.10 or 9.11 with respect to any such claim, dispute or other matter (except any which have been waived by the making or acceptance of final payment as provided in paragraph 14.15) will be a condition precedent to any exercise by OWNER or CONTRACTOR of such rights or remedies as either may otherwise have under the Contract Documents or by Laws or Regulations.

Limitations on ENGINEER's Authority and Responsibilities

9.13

- 9.13.1 Neither ENGINEER's authority or responsibility under this Article 9 or under any other provision of the Contract Documents nor any decision made by ENGINEER in good faith either to exercise or not exercise such authority or responsibility or the undertaking, exercise, or performance of any authority or responsibility by ENGINEER shall create, impose or give rise to any duty owed by ENGINEER to CONTRACTOR, any Subcontractor, any Supplier, any other person or organization, or to any surety for or employee or agent of any of them.
- 9.13.2 ENGINEER will not supervise, direct, control, or have authority over or be responsible for CONTRACTOR's means, methods, techniques, sequences, or procedures of construction, or the safety precautions and programs incident thereto, or for any failure of CONTRACTOR to comply with Laws and Regulations applicable to the furnishing or performance of the Work. ENGINEER will not be responsible for CONTRACTOR's failure to perform or furnish the Work in accordance with the Contract Documents.
- 9.13.3 ENGINEER will not be responsible for the acts or omissions of CONTRACTOR or of any Subcontractor, any Supplier, or of any other person or organization performing or furnishing any of the Work.
- 9.13.4 ENGINEER's review of the final Application for Payment and accompanying documentation and all maintenance and operating instructions, schedules, guarantees, bonds and certificates of inspection, tests and approvals, and other documentation required to be delivered by paragraph 14.12 will only be to

determine generally that their content complies with the requirements of, and in the case of certificates of inspections, tests and approvals that the results certified indicate compliance with, the Contract Documents.

- 9.13.5 The limitations upon authority and responsibility set forth in this paragraph 9.13 shall also apply to ENGINEER's Consultants, Resident Project Representative, and Assistants.

Article 10. Changes in the Work

- 10.1 Without invalidating the Agreement and without notice to any surety, OWNER may, at any time or from time to time, order additions, deletions, or revisions in the Work. A Written Amendment, a Change Order, or a Work Change Directive will authorize such additions, deletions, or revisions. Upon receipt of any such document, CONTRACTOR shall promptly proceed with the Work involved, which will be performed under the applicable conditions of the Contract Documents (except as otherwise specifically provided).
- 10.2 If OWNER and CONTRACTOR are unable to agree as to the extent, if any, of an adjustment in the Contract Price or an adjustment of the Contract Times that should be allowed as a result of a Work Change Directive, a claim may be made therefor as provided in Article 11 or Article 12.
- 10.3 CONTRACTOR shall not be entitled to an increase in the Contract Price or an extension of the Contract Times with respect to any Work performed that is not required by the Contract Documents as amended, modified, and supplemented as provided in paragraphs 3.5 and 3.6 except in the case of an emergency as provided in paragraph 6.23 or in the case of uncovering Work as provided in paragraph 13.9.
- 10.4 OWNER and CONTRACTOR shall execute appropriate Change Orders recommended by ENGINEER (or Written Amendments) covering:
- 10.4.1 changes in the Work which are (i) ordered by OWNER pursuant to paragraph 10.1., (ii) required because of acceptance of **defective** Work under paragraph 13.13 or correcting **defective** Work under paragraph 13.14, or (iii) agreed to by the parties;
- 10.4.2 changes in the Contract Price or Contract Times which are agreed to by the parties; and
- 10.4.3 changes in the Contract Price or Contract Times, which embody the substance of any written decision rendered by ENGINEER pursuant to paragraph 9.11.
- 10.5 If notice of any change affecting the general scope of the Work or the provisions of the Contract Documents (including, but not limited to, Contract Price or Contract Times) is required by the provisions of any Bond to be given to a surety, the giving of any such notice will be CONTRACTOR's responsibility, and the amount of each applicable Bond will be adjusted accordingly.

Article 11. Change of Contract Price

- 11.1 The Contract Price constitutes the total compensation (subject to authorized adjustments) payable to CONTRACTOR for performing the Work. All duties, responsibilities, and obligations assigned to or undertaken by CONTRACTOR shall be at CONTRACTOR's expense without change in the Contract Price.
- 11.2 The Contract Price may only be changed by a Change Order or by a Written Amendment. Any claim for an adjustment in the Contract Price shall be based on written notice delivered by the party making the claim to the other party and to ENGINEER promptly (but in no event later than fifteen days) after the start of the occurrence or event giving rise to the claim and stating the general nature of the claim. Notice of the amount of the claim with supporting data shall be delivered within thirty days after the start of such occurrence or event (unless ENGINEER allows additional time for claimant to submit additional or more accurate data in support of the claim) and shall be accompanied by claimant's written statement that the adjustment claimed covers all known amounts to which the claimant is entitled as a result of said occurrence or event. ENGINEER shall determine all claims for adjustment in the Contract Price in accordance with paragraph 9.11 if OWNER and CONTRACTOR cannot otherwise agree on the amount involved. No claim for an adjustment in the Contract Price will be valid if not submitted in accordance with this paragraph 11.2.
- 11.3 The value of any Work covered by a Change Order or of any claim for an adjustment in the Contract Price will be determined as follows:
- 11.3.1 where the Work involved is covered by unit prices contained in the Contract Documents, by application of such unit prices to the quantities of the items involved (subject to the provisions of paragraphs 11.9.1 through 11.9.3 inclusive);
 - 11.3.2 where the Work involved is not covered by unit prices contained in the Contract Documents, by a mutually agreed lump sum (which may include an allowance for overhead and profit not necessarily in accordance with paragraph 11.6.2);
 - 11.3.3 where the Work involved is not covered by unit prices contained in the Contract Documents and agreement to a lump sum is not reached under paragraph 11.3.2, on the basis of the Cost of the Work (determined as provided in paragraphs 11.4 and 11.5) plus CONTRACTOR's fee for overhead and profit (determined as provided in paragraph 11.6).

Cost of the Work

- 11.4 The term Cost of the Work means the sum of all costs necessarily incurred and paid by CONTRACTOR in the proper performance of the Work. Except as otherwise may be agreed to in writing by OWNER, such costs shall be in amounts no higher than those prevailing in the locality of the Project, shall include only the following items and shall not include any of the costs itemized in paragraph 11.5:
- 11.4.1 Certified payroll record costs for employees in the direct employment of CONTRACTOR in the performance of the Work under schedules of job classifications shall be submitted to ENGINEER with the claim. Such employees

shall include without limitation superintendents, foremen, and other personnel employed full-time at the site. Payroll costs for employees not employed full time on the Work shall be apportioned on the basis of their time spent on the Work. Payroll costs shall include, but not be limited to, salaries and wages plus the cost of fringe benefits which shall include social security contributions, unemployment, excise and payroll taxes, workers' compensation, health and retirement benefits, bonuses, sick leave, vacation and holiday pay applicable thereto. The expenses of performing Work after regular working hours, on Saturday, Sunday, or legal holidays, shall be included in the above to the extent authorized by OWNER.

- 11.4.2 Invoices for cost of all materials and equipment furnished and incorporated in the Work, including costs of transportation and storage thereof, and Suppliers' field services required in connection therewith shall be submitted to ENGINEER with the claim. All cash discounts shall accrue to CONTRACTOR unless OWNER deposits funds with CONTRACTOR with which to make payments, in which case the cash discounts shall accrue to OWNER. All trade discounts, rebates, refunds, and returns from sale of surplus materials and equipment shall be in accordance with the State Department of Highways, Division of Highways, and State of Colorado Standard Specifications for Road and Bridge Construction 2005 Edition. If the materials used in performing the extra Work are taken from CONTRACTOR's stock, then in lieu of invoices CONTRACTOR shall furnish an affidavit, certifying that such materials were taken from its stock, that the quantity claimed was actually used in the Work, and that the price and transportation claimed represent the actual cost to CONTRACTOR shall be submitted to ENGINEER with the claim.
- 11.4.3 Payments made by CONTRACTOR to the Subcontractors for Work performed or furnished by Subcontractors. If required by OWNER, CONTRACTOR shall obtain competitive bids from subcontractors acceptable to OWNER and CONTRACTOR and shall deliver such bids to OWNER who will then determine, with the advice of ENGINEER, which bids, if any, will be accepted. If any subcontract provides that the Subcontractor is to be paid on the basis of Cost of the Work Plus a fee, the Subcontractor's Cost of the Work and fee shall be determined in the same manner as CONTRACTOR's Cost of the Work and fee as provided in paragraphs 11.4, 11.5, 11.6 and 11.7. All subcontracts shall be subject to the other provisions of the Contract Documents insofar as applicable.
- 11.4.4 Costs of special consultants (including but not limited to engineers, architects, testing laboratories, surveyors, attorneys, and accountants) employed for services specifically related to the Work.
- 11.4.5 Supplemental costs including the following:
- 11.4.5.1 The proportion of necessary transportation, travel, and subsistence expenses of CONTRACTOR's employees incurred in discharge of duties connected with the Work.
- 11.4.5.2 Cost, including transportation and maintenance, of all materials, supplies, equipment, machinery, appliances, office and

temporary facilities at the site and hand tools not owned by the workers, which are consumed in the performance of the Work, and cost less market value of such items used but not consumed which remain the property of CONTRACTOR.

11.4.5.3

Rentals rates of all construction equipment and machinery and the parts thereof which has been authorized by ENGINEER, CONTRACTOR will be paid for the use of equipment in the manner hereinafter specified. Rental rates will be from the current edition of the Rental Rate Blue Book for Construction Equipment and will be determined as follows:

Hourly rate: $RR = (ADJ\ BB/176)(RF)(SAF) + EOC$

Where:	RR	=	Hourly rental rate
	ADJ BB/176	=	Blue Book Monthly Rate adjusted for year of manufacture/176
	RF	=	Regional Factor of 1.06
	SAF	=	State Adjustment Factor of 1.05
	EOC	=	Estimated Hourly Operating Costs from Blue Book

With each claim, CONTRACTOR shall submit the rental rate calculations including copies of the appropriate pages of the Blue Book for each piece of equipment listed in the claim.

Rental of equipment not owned by CONTRACTOR will be paid for by invoice cost plus operating cost (EOC). Copies of the applicable pages of the Rental Rate Blue Book for Construction Equipment shall be submitted to ENGINEER with the claim.

The costs of transportation, loading, unloading, installation, dismantling, and removal thereof all in accordance with the terms of said rental agreements. If equipment is used intermittently and when not in use could be returned to its rental source at less expense to OWNER than holding it at the Work site, it shall be returned unless CONTRACTOR elects to keep it at the Work site at no expense to OWNER. The rental of any such equipment, machinery, or parts shall cease when the use of the equipment is no longer necessary for the Work. No payment will be made for the use of tools, which have a replacement value of \$200.00 or less. Operators will be paid for separately as provided in paragraph 11.4.1. Certified invoices for rental cost of all construction equipment and machinery incorporated in the Work shall be submitted to ENGINEER with the claim.

- 11.4.5.4 Sales, consumer, use, or similar taxes related to the Work, and for which CONTRACTOR is liable, imposed by Laws and Regulations.
- 11.4.5.5 Deposits lost for causes other than negligence of CONTRACTOR, any Subcontractor or anyone directly or indirectly employed by any of them or for whose acts any of them may be liable.
- 11.4.5.6 Losses and damages (and related expenses) caused by damage to the work, not compensated by insurance or otherwise, sustained by CONTRACTOR in connection with the performance and furnishing of the Work, (except losses and damages within the deductible amounts of property insurance established by OWNER in accordance with paragraph 5.9), provided they have resulted from causes other than the negligence of CONTRACTOR, any Subcontractor, or anyone directly or indirectly employed by any of them or for whose acts any of them may be liable. Such losses shall include settlements made with the written consent and approval of OWNER. No such losses, damages and expenses shall be included in the Cost of the Work for the purpose of determining CONTRACTOR's fee. If, however, any such loss or damage requires reconstruction and CONTRACTOR is placed in charge thereof, CONTRACTOR shall be paid for services a fee proportionate to that stated in paragraph 11.6.2.
- 11.4.5.7 The cost of utilities, fuel, and sanitary facilities at the site.
- 11.4.5.8 Minor expenses such as telegrams, long distance telephone calls, telephone service at the site, expressage, and similar petty cash items in connection with the Work.

11.5 The term Cost of the Work shall not include any of the following:

- 11.5.1 Payroll costs and other compensation of CONTRACTOR's officers, executives, principals (of partnership and sole proprietorships), general managers, engineers, architects, estimators, attorneys, auditors, accountants, purchasing and contracting agents, expeditors, timekeepers, clerks, and other personnel employed by CONTRACTOR whether at the site or in CONTRACTOR's principal or a branch office for general administration of the Work and not specifically included in the agreed upon schedule of job classifications referred to in paragraph 11.4.1 or specifically covered by paragraph 11.4.4: all of which are to be considered administrative costs covered by CONTRACTOR's fee.
- 11.5.2 Expenses of CONTRACTOR's principal and branch offices other than CONTRACTOR's office at the site.
- 11.5.3 Any part of CONTRACTOR's capital expenses, including interest on CONTRACTOR's capital employed for the Work and charges against CONTRACTOR for delinquent payments.

11.5.4 Cost of premiums for all Bonds and for all insurance whether or not CONTRACTOR is required by the Contract Documents to purchase and maintain the same (except for the cost of premiums covered by subparagraph 11.4.5.9 above).

11.5.5 Costs due to the negligence of CONTRACTOR, any Subcontractor, or anyone directly or indirectly employed by any of them or for whose acts any of them may be liable, including but not limited to, the correction of **defective** Work, disposal of materials or equipment wrongly supplied and making good any damage to property.

Other overhead or general expense costs of any kind and the costs of any item not specifically and expressly included in paragraph 11.5.

11.6 CONTRACTOR's fee allowed to CONTRACTOR for overhead and profit shall be determined as follows:

11.6.1 a mutually acceptable fixed fee; or

11.6.2 if a fixed fee is not agreed upon, then a fee based on the following percentages of the various portions of the Cost of the work:

11.6.2.1 for costs incurred under paragraphs 11.4.1 and 11.4.2, CONTRACTOR's fee shall be fifteen percent;

11.6.2.2 for costs incurred under paragraph 11.4.3, CONTRACTOR's fee shall be five percent;

11.6.2.3 where one or more tiers of subcontracts are on the basis of Cost of the Work plus a fee and no fixed fee is agreed upon, the intent of paragraphs 11.4.1, 11.4.2, 11.4.3, and 11.6.2 is that the Subcontractor who actually performs or furnishes the Work, at whatever tier, will be paid a fee of fifteen percent of the costs incurred by such Subcontractor under paragraphs 11.4.1 and 11.4.2 and that any higher tier Subcontractor and CONTRACTOR will each be paid a fee of five percent of the amount paid to the next lower tier Subcontractor;

11.6.2.4 no fee shall be payable on the basis of costs itemized under paragraphs 11.4.4, 11.4.5, and 11.5;

11.6.2.5 the amount of credit to be allowed by CONTRACTOR to OWNER for any change which results in a net decrease in cost will be the amount of the actual net decrease in cost plus a deduction in CONTRACTOR's fee by an amount equal to five percent of such net decrease; and

11.6.2.6 when both additions and credits are involved in any one change, the adjustment in CONTRACTOR's fee shall be computed on the basis of the net change in accordance with paragraphs 11.6.2.1 through 11.6.2.5, inclusive.

- 11.7 Whenever the cost of any Work is to be determined pursuant to paragraphs 11.4 and 11.5, CONTRACTOR will establish and maintain records thereof in accordance with generally accepted accounting practices and submit in form acceptable to ENGINEER an itemized cost breakdown together with supporting data.

Cash Allowances

- 11.8 It is understood that CONTRACTOR has included in the Contract Price all allowances so named in the Contract Documents and shall cause the Work so covered to be furnished and performed for such sums as may be acceptable to OWNER and ENGINEER. CONTRACTOR agrees that:

- 11.8.1 the allowances include the cost to CONTRACTOR (less any applicable trade discounts) of materials and equipment required by the allowances to be delivered at the site, and all applicable taxes; and
- 11.8.2 CONTRACTOR's costs for unloading and handling on the site, labor, installation costs, overhead, profit, and other expenses contemplated for the allowances have been included in the Contract Price and not in the allowances and no demand for additional payment on account of any of the foregoing will be valid.

Prior to final payment, an appropriate Change Order will be issued as recommended by ENGINEER to reflect actual amounts due CONTRACTOR on account of Work covered by allowances, and the Contract Price shall be correspondingly adjusted.

Unit Price Work

11.9

- 11.9.1 Where the Contract Documents provide that all or part of the Work is to be Unit Price Work, initially the Contract Price will be deemed to include for all Unit Price Work an amount equal to the sum of the established unit price for each separately identified item of Unit Price Work times the estimated quantity of each item as indicated in the Agreement. The estimated quantities of items of Unit Price Work are not guaranteed and are solely for the purpose of comparison of Bids and determining an initial Contract Price. Determinations of the actual quantities and classifications of Unit Price Work performed by CONTRACTOR will be made by ENGINEER in accordance with paragraph 9.10.
- 11.9.2 Each unit price will be deemed to include an amount considered by CONTRACTOR to be adequate to cover CONTRACTOR's overhead and profit for each separately identified item.
- 11.9.3 OWNER or CONTRACTOR may make a claim for an adjustment in the contract Price in accordance with Article 11 if:
- 11.9.3.1 the quantity of any item of Unit Price Work performed by CONTRACTOR differs materially and significantly from the estimated quantity of such item indicated in the Agreement;
- 11.9.3.2 there is no corresponding adjustment with respect to any other item of Work; and

11.9.3.3 if CONTRACTOR believes that CONTRACTOR is entitled to an increase in Contract Price as a result of having incurred additional expense of, OWNER believes that OWNER is entitled to a decrease in Contract Price and the parties are unable to agree as to the amount of any such increase or decrease.

11.9.4 In no event shall a claim be made or an adjustment of Unit Price allowed if a variation in actual quantities used does not equal or exceed 25 percent (25%) of the total Bid Price.

Article 12. Change of Contract Times

12.1 The Contract Times (or Milestones) may only be changed by a Change Order or a Written Amendment. Any claim for an adjustment of the Contract Times (or Milestones) shall be based on written notice delivered by the party making the claim to the other party and to ENGINEER promptly (but in no event later than fifteen days) after the occurrence of the event giving rise to the claim and stating the general nature of the claim. Notice of the extent of the claim with supporting data shall be delivered within thirty days after such occurrence (unless ENGINEER allows an additional period of time to ascertain more accurate data in support of the claim) and shall be accompanied by the claimant's written statement that the adjustment claimed is the entire adjustment to which the claimant has reason to believe it is entitled as a result of the occurrence of said event. All claims for adjustment in the Contract Times (or Milestones) shall be determined by ENGINEER in accordance with paragraph 9.11 if OWNER and CONTRACTOR cannot otherwise agree. No claim for an adjustment in the Contract Times (or Milestones) will be valid if not submitted in accordance with the requirements of this paragraph 12.1.

12.2 Liquidated damages. OWNER and CONTRACTOR agree and recognize that time is of the essence for every time period set forth in the Contract Documents and that OWNER will suffer financial loss if the Work is not substantially complete within the time set forth in the Contract Documents, plus any extensions thereof allowed in accordance with this Article 12 of the General Conditions. If CONTRACTOR fails to perform the Work within the specified time set forth in the Contract Documents as adjusted pursuant to Article 12, OWNER and CONTRACTOR agree that as liquidated damages, and not as a penalty, for delay in performance CONTRACTOR shall pay OWNER in the amount stipulated below for each and every contract day that expires after the time set forth in the Contract Documents for Substantial Completion of the Work until the same is finally complete and ready for Final Payment. OWNER shall have the right to deduct liquidated damages from any amount due or that may become due to CONTRACTOR, or to collect such liquidated damages from CONTRACTOR or the Surety. OWNER has the option to enforce liquidated damages or to waive such damages. The liquidated damages herein specified shall only apply to CONTRACTOR's delay in performance. Liquidated damages are intended only to compensate OWNER for additional OWNER personnel efforts in administering the Contract after normally scheduled completion dates, and for City governmental and citizen inconvenience, lost opportunities, and lost confidence in government and morale of government when work is not completed on time. Such damages are uncertain in amount and difficult to measure and prove accurately. By executing this contract, CONTRACTOR agrees that the liquidated damages specified in the Contract Documents are reasonable in amount and are not disproportionate to actual anticipated damages. Liquidated damages do not include any sums of money to reimburse OWNER for extra costs which OWNER may become obligated to pay on other contracts which are delayed or extended because of CONTRACTOR's failure to

complete the Work within the time periods set forth in the Contract Documents. Liquidated damages are not intended to include litigation or attorneys' fees incurred by OWNER, or other incidental or consequential damages suffered by OWNER due to CONTRACTOR's performance. If OWNER charges liquidated damages to CONTRACTOR, this shall not preclude OWNER from commencing an action against CONTRACTOR for other actual harm resulting from CONTRACTOR's performance, which is not due to CONTRACTOR's delay in performance. In order to recover liquidated damages, OWNER is under no obligation to prove the actual damages sustained by OWNER due to CONTRACTOR's delay in performance. In no event shall CONTRACTOR be assessed liquidated damages if the contract is suspended or terminated for events beyond the control of CONTRACTOR for which a time extension beyond the original schedule of performance could be granted under 12.3.

The parties agree that liquidated damages shall be in the amount set forth in Article 2 of the Agreement.

- 12.3 Where CONTRACTOR is prevented from completing any part of the Work within the Contract Times (or Milestones) due to delay beyond the control of CONTRACTOR, the Contract Times (or Milestones) will be extended in an amount equal to the time lost due to such delay if a claim is made therefor as provided in paragraph 12.1. Delays beyond the control of CONTRACTOR shall include, but not be limited to, acts or neglect by OWNER, acts or neglect of utility owners or other contractors performing other work as contemplated by Article 7, fires, floods, epidemics, abnormal weather conditions or acts of God. Delays attributable to and within the control of a Subcontractor or Supplier shall be deemed to be delays within the control of CONTRACTOR.
- 12.4 CONTRACTOR specifically waives any and all claims against OWNER for damages resulting from any hindrance or delay caused by circumstances beyond the control of CONTRACTOR that prevents completing any part of the Work within the Contract Times (or Milestones), whether or not caused by OWNER. CONTRACTOR may instead be granted an extension of the Contract Times for which OWNER will not claim liquidated damages, provided that the hindrance or delay is beyond the control of CONTRACTOR. An extension of the Contract Times (or Milestones) in an amount equal to the time lost due to such delay shall be CONTRACTOR's sole and exclusive remedy for such delay. In no event shall OWNER be liable to CONTRACTOR, any subcontractor, any supplier, any other person or organization, or to any surety for or employee or agent of any of them, for damages arising out of or resulting from delays caused by or within the control of CONTRACTOR, or delays beyond the control of CONTRACTOR whether or not caused by OWNER.

Article 13. Tests and Inspections; Correction, Removal, or Acceptance of Defective Work

Notice of Defects

- 13.1 Prompt notice of all **defective** Work of which OWNER or ENGINEER has actual knowledge will be given to CONTRACTOR. All **defective** Work may be rejected, corrected, or accepted as provided in this Article 13.

Access to Work

- 13.2 OWNER, ENGINEER, ENGINEER's Consultants, other representatives and personnel of OWNER, independent testing laboratories, and governmental agencies with jurisdictional interests will have access to the Work at reasonable times for their observation, inspecting and testing.

CONTRACTOR shall provide them proper and safe conditions for such access and advise them of CONTRACTOR's site safety procedures and programs so that they may comply therewith as applicable.

Tests and Inspections

- 13.3 CONTRACTOR shall give ENGINEER timely notice of readiness of the Work for all required inspections, tests or approvals, and shall cooperate with inspection and testing personnel to facilitate required inspections or tests.
- 13.4 OWNER shall employ and pay for the services of an independent testing laboratory to perform all inspections, tests, or approvals required by the Contract Documents except:
- 13.4.1 for inspections, tests, or approvals covered by paragraph 13.5 below:
 - 13.4.2 that costs incurred in connection with tests or inspections conducted pursuant to paragraph 13.9 below shall be paid as provided in said paragraph 13.9; and
 - 13.4.3 as otherwise specifically provided in the Contract Documents.
 - 13.4.4 Any and all retesting of soil necessitated by CONTRACTOR's operations or inability to obtain specified density test results on the first attempt shall be the sole responsibility and costs of CONTRACTOR to achieve required passing test results. Retesting required because of non-conformance to specified requirements shall be performed by the independent firm employed by OWNER. Payment for retesting will be charged to CONTRACTOR by deducting inspection, testing and administrative charges from the Contract Price.
- 13.5 If Laws or Regulations of any public body having jurisdiction require any Work (or part thereof) specifically to be inspected, tested or approved by an employee or other representative of such public body, CONTRACTOR shall assume full responsibility for arranging and obtaining such inspections, tests or approvals, pay all costs in connection therewith, and furnish ENGINEER the required certificates of inspection, or approval. CONTRACTOR shall also be responsible for arranging and obtaining and shall pay all costs in connection with any inspections, tests or approvals required for OWNER's and ENGINEER's acceptance of materials or equipment to be incorporated in the Work, or of materials, mix designs, or equipment submitted for approval prior to CONTRACTOR's purchase thereof for incorporation in the Work.
- 13.6 If any Work (or the work of others) that is to be inspected, tested, or approved is covered by CONTRACTOR without written concurrence of ENGINEER, it must, if requested by ENGINEER, be uncovered for observation.
- 13.7 Uncovering Work as provided in paragraph 13.6 shall be at CONTRACTOR's expense unless CONTRACTOR has given ENGINEER timely notice of CONTRACTOR's intention to cover the same and ENGINEER has not acted with reasonable promptness in response to such notice.

Uncovering Work

- 13.8 If any Work is covered contrary to the written request of ENGINEER, it must, if requested by ENGINEER, be uncovered for ENGINEER's observation and replaced at CONTRACTOR's expense.

- 13.9 If ENGINEER considers it necessary or advisable that covered Work be observed by ENGINEER or inspected or tested by others, CONTRACTOR, at ENGINEER's request, shall uncover, expose or otherwise make available for observation, inspection or testing as ENGINEER may require, that portion of the Work in question, furnishing all necessary labor, material and equipment. If it is found that such Work is **defective**, CONTRACTOR shall pay all claims, costs, losses and damages caused by, arising out of or resulting from such uncovering, exposure, observation, inspection and testing and of satisfactory replacement or reconstruction (including but not limited to all costs of repair or replacement of work of others); and OWNER shall be entitled to an appropriate decrease in the Contract Price, and, if the parties are unable to agree as to the amount thereof, may make a claim therefor as provided in Article 11.

OWNER May Stop the Work

- 13.10 If the Work is **defective**, or CONTRACTOR fails to supply sufficient skilled workers or suitable materials or equipment, or fails to furnish or perform the Work in such a way that the completed Work will conform to the Contract Documents, OWNER may order CONTRACTOR to stop the Work, or any portion thereof, until the cause for such order has been eliminated; however, this right of OWNER to stop the Work shall not give rise to any duty on the part of OWNER to exercise this right for the benefit of CONTRACTOR or any surety or other party.

Correction or Removal of Defective Work

- 13.11 If required by ENGINEER, CONTRACTOR shall promptly, as directed, either correct all **defective** Work, whether or not fabricated, installed, or completed, or, if the Work has been rejected by ENGINEER, remove it from the site and replace it with Work that is not **defective**. CONTRACTOR shall pay all claims, costs, losses, and damages caused by or resulting from such correction or removal (including but not limited to all costs of repair or replacement of work of others).

Correction Period

13.12

- 13.12.1 If within one year after the date of Final Completion or such longer period of time as may be prescribed by Laws or Regulations or by the terms of any applicable special guarantee required by the Contract Documents or by any specific provision of the Contract Documents, any Work is found to be defective, CONTRACTOR shall within seven calendar days after receiving notice from OWNER, without cost to OWNER and in accordance with OWNER's written instructions: (i) correct such defective Work, or if its has been rejected by OWNER, remove it from the site and replace it with WORK that is not defective, and (ii) satisfactorily correct or remove and replace any damage to other Work or the work of others resulting therefrom. If CONTRACTOR does not within seven calendar days after receiving notice from OWNER comply with the terms of such instructions, or in an emergency where delay would cause serious risk of loss or damage, OWNER may have the defective Work corrected or the rejected Work removed and replaced, and all claims, costs, losses, and damages caused by or resulting from such removal and replacement (including but not limited to all costs of repair or replacement of work of others) will be paid by CONTRACTOR.

- 13.12.2 In special circumstances where a particular item of equipment is placed in continuous service before Substantial Completion of all the Work, the correction period for that item may start to run from an earlier date if so provided in the Specifications or by Written Amendment.
- 13.12.3 Where **defective** Work (and damage to other Work resulting therefrom) has been corrected, removed, or replaced under this paragraph 13.12, the correction period hereunder with respect to such Work will be extended for an additional period of one year after such correction or removal and replacement has been satisfactorily completed.

Acceptance of Defective Work

- 13.13 If, instead of requiring correction or removal and replacement of **defective** Work, OWNER (and, prior to ENGINEER's recommendation of final payment, also ENGINEER) prefers to accept it, OWNER may do so. CONTRACTOR shall play all claims, costs, losses, and damages attributable to OWNER's evaluation of and determination to accept such **defective** Work (such costs to be approved by ENGINEER as to reasonableness). If any such acceptance occurs prior to ENGINEER's recommendation of final payment, a Change Order will be issued incorporating the necessary revisions in the Contract Documents with respect to the Work; and OWNER shall be entitled to an appropriate decrease in the Contract Price, and, if the parties are unable to agree as to the amount thereof, OWNER may make a claim therefor as provided in Article 11. If the acceptance occurs after such recommendation, CONTRACTOR will pay an appropriate amount to OWNER.

OWNER May Correct Defective Work

- 13.14 If CONTRACTOR fails within a reasonable time after written notice from ENGINEER to correct **defective** Work or to remove and replace rejected Work as required by ENGINEER in accordance with paragraph 13.11, or if CONTRACTOR fails to perform the Work in accordance with the Contract Documents, or if CONTRACTOR fails to comply with any other provision of the Contract Documents, OWNER may, after seven days' written notice to CONTRACTOR, correct and remedy any such deficiency. In exercising the rights and remedies under this paragraph OWNER shall proceed expeditiously. In connection with such corrective and remedial action, OWNER may exclude CONTRACTOR from all or part of the site, take possession of all or part of the Work, and suspend CONTRACTOR's services related thereto, take possession of CONTRACTOR's tools, appliances, construction equipment and machinery at the site and incorporate in the Work all materials and equipment stored at the site or for which OWNER has paid CONTRACTOR but which are stored elsewhere. CONTRACTOR shall allow OWNER, OWNER's representatives, agents and employees, OWNER's other contractors and ENGINEER and ENGINEER's Consultants access to the site to enable OWNER to exercise the rights and remedies under this paragraph. All claims, costs, losses, and damages incurred or sustained by OWNER in exercising such rights and remedies will be charged against CONTRACTOR and a Change Order will be issued incorporating the necessary revisions in the Contract Documents with respect to the Work; and OWNER shall be entitled to an appropriate decrease in the Contract Price, and, if the parties are unable to agree as to the amount thereof, OWNER may make a claim therefor as provided in Article 11. Such claims, costs, losses, and damages will include but not be limited to all costs of repair or replacement of work of others destroyed or damaged by correction, removal or replacement of CONTRACTOR's **defective** Work. CONTRACTOR shall not be allowed an extension of the Contract

Times (or Milestones) because of any delay in the performance of the Work attributable to the exercise by OWNER of OWNER's rights and remedies hereunder.

Article 14. Payments to Contractor and Completion

Schedule of Values

- 14.1 Progress payments on account of Unit Price Work will be based on the number of units completed.

Application for Progress Payment

- 14.2 At least twenty days before the date established for each progress payment (but not more often than once a month), CONTRACTOR shall submit to ENGINEER for review an Application for Payment filled out and signed by CONTRACTOR covering the Work completed as of the date of the Application and accompanied by such supporting documentation as is required by the Contract Documents. If payment is requested on the basis of materials and equipment not incorporated in the Work but delivered and suitably stored at the site or at another location agreed to in writing, the Application for Payment shall also be accompanied by a bill of sale, invoice or other documentation warranting that OWNER has received the materials and equipment free and clear of all Liens, claims, security interests, or encumbrances and evidence that the materials and equipment are covered by appropriate property insurance and other arrangements to protect OWNER's interest therein, all of which will be satisfactory to OWNER. The amount of retainage with respect to progress payments will be as stipulated in the Agreement. With each application for payment CONTRACTOR shall submit a notarized waiver(s) of claim signed by CONTRACTOR acceptable in form to ENGINEER. The waiver of claim for payment for the work of CONTRACTOR shall equal the amount of the previous payment distributed to CONTRACTOR for work of CONTRACTOR and the amount of the total previous payment distributed to CONTRACTOR.

CONTRACTOR's Warranty of Title

- 14.3 CONTRACTOR warrants and guarantees that title to all Work, materials and equipment covered by any Application for Payment, whether incorporated in the Project or not, will pass to OWNER no later than the time of payment free and clear of all Liens.

Review of Applications for Progress Payment

- 14.4 ENGINEER will, within ten days after receipt of each Application for Payment, either indicate in writing a recommendation of payment and present the Application to OWNER or return the Application to CONTRACTOR indicating in writing ENGINEER's reasons for refusing to recommend payment. In the latter case, CONTRACTOR may make the necessary corrections and resubmit the Application. Ten days after presentation of the Application for Payment to OWNER with ENGINEER's recommendation, the amount recommended will (subject to the provisions of the last sentence of paragraph 14.7) become due and when due will be paid by OWNER to CONTRACTOR.
- 14.5 ENGINEER's recommendation of any payment requested in an Application for Payment will constitute a representation by ENGINEER to OWNER, based on ENGINEER's onsite observations

of the executed Work as an experienced and qualified design professional and on ENGINEER's review of the Application for Payment and the accompanying data and schedules, that to the best of ENGINEER's knowledge, information and belief:

- 14.5.1 the Work has progressed to the point indicated,
- 14.5.2 the quality of the Work is generally in accordance with the Contract Documents (subject to an evaluation of the Work as a functioning whole prior to or upon Substantial Completion, to the results of any subsequent tests called for in the Contract Documents, to a final determination of quantities and classifications for Unit Price Work under paragraph 9.10 and to any other qualifications stated in the recommendation), and
- 14.5.3 the conditions precedent to CONTRACTOR's being entitled to such payment appear to have been fulfilled insofar as it is ENGINEER's responsibility to observe the Work.

However, by recommending any such payment ENGINEER will not thereby be deemed to have represented that: (i) exhaustive or continuous onsite inspections have been made to check the quality or the quantity of the Work beyond the responsibilities specifically assigned to ENGINEER in the Contract Documents or (ii) that there may not be other matters or issues between the parties that might entitle CONTRACTOR to be paid additionally by OWNER or entitle OWNER to withhold payment to CONTRACTOR.

- 14.6 ENGINEER's recommendation of any payment, including final payment, shall not mean that ENGINEER is responsible for CONTRACTOR's means, methods, techniques, sequences, or procedures of construction, or the safety precautions and programs incident thereto, or for any failure of CONTRACTOR to comply with Laws and Regulations applicable to the furnishing or performance of Work, or for any failure of CONTRACTOR to perform or furnish Work in accordance with the Contract Documents.
- 14.7 ENGINEER may refuse to recommend the whole or any part of any payment if, in ENGINEER's opinion, it would be incorrect to make the representations to OWNER referred to in paragraph 14.5. ENGINEER may also refuse to recommend any such payment, or, because of subsequently discovered evidence or the results of subsequent inspections or tests, nullify any such payment previously recommended, to such extent as may be necessary in ENGINEER's opinion to protect OWNER from loss because:
 - 14.7.1 the Work is **defective**, or completed Work has been damaged requiring correction or replacement,
 - 14.7.2 the Contract Price has been reduced by Written Amendment or Change Order,
 - 14.7.3 OWNER has been required to correct **defective** Work or complete Work in accordance with paragraph 13.14, or
 - 14.7.4 ENGINEER has actual knowledge of the occurrence of any of the events enumerated in paragraphs 15.2.1 through 15.2.3 inclusive.

In addition to the retainages set forth in the Contract Documents, OWNER may retain one hundred percent (100%) of all progress payments for any unsatisfactory performance of the Work and any payment recommended by ENGINEER, including without limitation:

Defective work or failure to repair or replace defective work;

Claims filed against CONTRACTOR, or reasonable evidence indicating probable filing of such claims;

Failure of CONTRACTOR to make adequate or proper payments to subcontractors or suppliers for materials, equipment or labor;

Failure to obtain necessary permits or licenses, or to comply with applicable laws, ordinances, codes, or regulations, unless such noncompliance is due to reasons beyond the control of CONTRACTOR, or due to act of OWNER or and ENGINEER hired by OWNER, or agents or employees thereof;

Reasonable evidence that the Work cannot be completed for the unpaid balance of the Contract Price then unpaid;

Reasonable evidence that the Work will not be completed within the Contract Time, and that the unpaid balance would not be adequate to cover actual or liquidated damages for the anticipated delay;

Persistent failure to carry out the Work in accordance with the Contract Documents;

As a set off for amounts due OWNER on other items;

Collusion with other bidders in preparing the bid;

Actual knowledge of the occurrence of any of the events enumerated in paragraphs 14.7.1 through 14.7.3 or paragraphs 15.2.1 through 15.2.3, inclusive.

When the above reasons for withholding payment are removed and corrected to OWNER's satisfaction, OWNER shall make payment to CONTRACTOR of the sums withheld pursuant to this paragraph, subject to the amounts required to be retained by the Contract Documents.

Progress Payments to Suppliers and Subcontractors. CONTRACTOR shall make partial payments of the amount due to each of CONTRACTOR's suppliers and subcontractors in the same manner as OWNER is required to pay CONTRACTOR under Article 4 of the Agreement and Article 14 of the General Conditions, provided that the suppliers and subcontractors are performing to CONTRACTOR's satisfaction. If OWNER is notified that CONTRACTOR is in arrears in payments to CONTRACTOR's suppliers or subcontractors, OWNER shall notify CONTRACTOR and determine why such funds are being withheld. If OWNER determines that no legitimate basis exists for CONTRACTOR's withholding of such payments, OWNER may, five (5) days after the mailing of written notice to CONTRACTOR, make such payments directly to CONTRACTOR's suppliers or subcontractors from funds which otherwise would be due CONTRACTOR.

Substantial Completion

- 14.8 When CONTRACTOR considers the entire Work ready for its intended use CONTRACTOR shall notify OWNER and ENGINEER in writing that the entire Work is substantially complete (except for items specifically listed by CONTRACTOR as incomplete) and request that ENGINEER issue a certificate of Substantial Completion. Within a reasonable time thereafter, OWNER, CONTRACTOR, and ENGINEER shall make an inspection of the Work to determine the status of completion. If ENGINEER does not consider the Work substantially complete, ENGINEER will notify CONTRACTOR in writing giving the reasons therefor. If ENGINEER considers the Work substantially complete, ENGINEER will prepare and deliver to OWNER a tentative certificate of Substantial Completion, which shall fix the date of Substantial Completion. There shall be attached to the certificate a tentative list of items to be completed or corrected before final payment. OWNER shall have seven days after receipt of the tentative certificate during which to make written objection to ENGINEER as to any provisions of the certificate or attached list. If, after considering such objections, ENGINEER concludes that the Work is not substantially complete, ENGINEER will within fourteen days after submission of the tentative certificate to OWNER notify CONTRACTOR in writing, stating the reasons therefor. If, after consideration of OWNER's objections, ENGINEER considers the Work substantially complete, ENGINEER will within said fourteen days execute and deliver to OWNER and CONTRACTOR a definitive certificate of Substantial Completion (with a revised tentative list of items to be completed or corrected) reflecting such changes from the tentative certificate as ENGINEER believes justified after consideration of any objections from OWNER. At the time of delivery of the tentative certificate of Substantial Completion, ENGINEER will deliver to OWNER and CONTRACTOR a written recommendation as to division of responsibilities pending final payment between OWNER and CONTRACTOR with respect to security, operation, safety, maintenance, heat, utilities, insurance, and warranties and guarantees. Unless OWNER and CONTRACTOR agree otherwise in writing and so inform ENGINEER in writing prior to ENGINEER's issuing the definitive certificate of Substantial Completion, ENGINEER's aforesaid recommendation will be binding on OWNER and CONTRACTOR until final payment.
- 14.9 OWNER shall have the right to exclude CONTRACTOR from the Work after the date of Substantial Completion, but OWNER shall allow CONTRACTOR reasonable access to complete or correct items on the tentative list.

Partial Utilization

- 14.10 Use by OWNER at OWNER's option of any substantially completed part of the Work which: (i) has specifically been identified in the Contract Documents or (ii) OWNER, ENGINEER, and CONTRACTOR agree constitutes a separately functioning and usable part of the Work that can be used by OWNER for its intended purpose without significant interference with CONTRACTOR's performance of the remainder of the Work, may be accomplished prior to Substantial Completion of all the Work subject to the following:
- 14.10.1 OWNER at any time may request CONTRACTOR in writing to permit OWNER to use any such part of the Work which OWNER believes to be ready for its intended use and substantially complete. If CONTRACTOR agrees that such part of the Work is substantially complete, CONTRACTOR will certify to OWNER and ENGINEER that such part of the Work is substantially complete and request ENGINEER to issue a certificate of Substantial Completion for that part of the Work. CONTRACTOR at any time may notify OWNER and ENGINEER in writing

that CONTRACTOR considers any such part of the Work ready for its intended use and substantially complete and request ENGINEER to issue a certificate of Substantial Completion for that part of the Work. Within a reasonable time after either such request, OWNER, CONTRACTOR, and ENGINEER shall make an inspection of that part of the Work to determine its status of completion. If ENGINEER does not consider that part of the Work to be substantially complete, ENGINEER will notify OWNER and CONTRACTOR in writing giving the reasons therefor. If ENGINEER considers that part of the Work to be substantially complete, the provisions of paragraphs 14.8 and 14.9 will apply with respect to certification of Substantial Completion of that part of the Work and the division of responsibility in respect thereof and access thereto.

Final Inspection

- 14.11 Upon written notice from CONTRACTOR that the entire Work or an agreed portion thereof is complete, ENGINEER will make a final inspection with OWNER and CONTRACTOR and will notify CONTRACTOR in writing of all particulars in which this inspection reveals that the Work is incomplete or **defective**. CONTRACTOR shall immediately take such measures as are necessary to complete such Work or remedy such deficiencies.

Final Application for Payment

- 14.12 After CONTRACTOR has completed all such corrections to the satisfaction of ENGINEER and delivered in accordance with the Contract Documents all maintenance and operating instructions, schedules, guarantees, Bonds, certificates or other evidence of insurance required by paragraph 5.4, certificates of inspection, marked-up record documents (as provided in paragraph 6.19) and other documents. CONTRACTOR may make application for final payment following the procedure for progress payments. The final application for payment shall be accompanied (except as previously delivered) by: (i) all documentation called for in the Contract Documents, including but not limited to the evidence satisfactory to OWNER of the continuation of completed operations insurance and any insurance coverage written on a claims-made basis at final payment and one year thereafter; (ii) the consent of surety to final payment and that the performance bond shall remain in effect throughout the guarantee period; (iii) complete and legally effective claim releases signed by all suppliers and subcontractors in the form provided in the Contract Documents certifying that all outstanding claims for payment have been paid. CONTRACTOR shall not receive final payment due under the Agreement until CONTRACTOR obtains and files the foregoing items (i), (ii), and (iii).

- 14.12.1 LIENS. Colorado Statutes do not provide for any right of lien against public buildings. In lieu thereof, §38-26-107, Colorado Revised Statutes, as amended, provides adequate relief for any claimant having furnished labor, materials, rental machinery, tools, equipment, or services toward construction of the particular public work in that final payment may not be made to a contractor until all such creditors have been put on notice by publication of such pending payment and given opportunity to stop payment to the contractor in the amount of such claims. Pursuant to §38-26-107, C.R.S., any supplier may bring a suit and file a notice of lis pendens against OWNER within ninety (90) days after the date set for final settlement. If any such supplier or person files any such claim and notice of lis pendens, OWNER shall withhold retained amounts from final payments to CONTRACTOR as are necessary to satisfy fully such claims.

References to liens appearing in Article 14 shall be deemed as references to claims made pursuant to C.R.S §38-26-101 et seq. unless the context requires otherwise.

Final Payment and Acceptance

- 14.13 If, on the basis of ENGINEER's observation of the Work during construction and final inspection, and ENGINEER's review of the final Application for Payment and accompanying documentation as required by the Contract Documents, ENGINEER is satisfied that the Work has been completed and CONTRACTOR's other obligations under the Contract Documents have been fulfilled, ENGINEER will, within ten days after receipt of the final Application for Payment, indicate in writing ENGINEER's recommendation of payment and present the Application to OWNER for payment. At the same time ENGINEER will also give written notice to OWNER and CONTRACTOR that the Work is acceptable subject to the provisions of paragraph 14.15. Otherwise, ENGINEER will return the Application to CONTRACTOR, indicating in writing the reasons for refusing to recommend final payment, in which case CONTRACTOR shall make the necessary corrections and resubmit the Application. Upon receipt of the ENGINEER's recommendation for payment and the final Application for Payment, OWNER shall order the publication of Notice of Final Payment as required by C.R.S. §38-26-107(1) and shall make final payment in accordance with C.R.S. 38-26-107(3).
- 14.14 If, through no fault of CONTRACTOR, final completion of the Work is significantly delayed and if ENGINEER so confirms, OWNER shall, upon receipt of CONTRACTOR's final Application for Payment and recommendation of ENGINEER, and without terminating the Agreement, make payment of the balance due for that portion of the Work fully completed and accepted. If the remaining balance to be held by OWNER for Work not fully completed or corrected is less than the retainage stipulated in the Agreement, and if Bonds have been furnished as required in paragraph 5.1, the written consent of the surety to the payment of the balance due for that portion of the Work fully completed and accepted shall be submitted by CONTRACTOR to ENGINEER with the Application for such payment. Such payment shall be made under the terms and conditions governing final payment, except that it shall not constitute a waiver of claims.

Waiver of Claims

- 14.15 The making and acceptance of final payment will constitute:
- 14.15.1 a waiver of all claims by OWNER against CONTRACTOR, except claims arising from unsettled Liens, from **defective** Work appearing after final inspection pursuant to paragraph 14.11, from failure to comply with the Contract Documents or the terms of any special guarantees specified therein, or from CONTRACTOR's continuing obligations under the Contract Documents; and
 - 14.15.2 a waiver of all claims by CONTRACTOR against OWNER other than those previously made in writing and still unsettled.

Article 15. Suspension of Work and Termination

OWNER May Suspend Work

- 15.1 At any time and without cause, OWNER may suspend the Work or any portion thereof for a period of not more than ninety days by notice in writing to CONTRACTOR and ENGINEER, which will fix the date on which Work will be resumed. CONTRACTOR shall resume the Work on the date so fixed. CONTRACTOR shall be allowed an adjustment in the Contract Price or an extension of the Contract Times, or both, directly attributable to any such suspension if CONTRACTOR makes an approved claim therefor as provided in Articles 11 and 12.

OWNER May Terminate

- 15.2 Upon the occurrence of any one or more of the following events:
- 15.2.1 if CONTRACTOR persistently fails to perform the Work in accordance with the Contract Documents (including, but not limited to, failure to supply sufficient skilled workers or suitable materials or equipment or failure to adhere to the progress schedule established under paragraph 2.8 as adjusted from time to time pursuant to paragraph 6.6);
 - 15.2.2 if CONTRACTOR disregards Laws or Regulations of any public body having jurisdiction;
 - 15.2.3 if CONTRACTOR otherwise violates in any substantial way any provisions of the Contract Documents;

OWNER may, after giving CONTRACTOR (and the surety, if any,) seven days' written notice and to the extent permitted by Laws and Regulations, terminate the services of CONTRACTOR, exclude CONTRACTOR from the site and take possession of the Work and of all CONTRACTOR's tools, appliances, construction equipment, and machinery at the site and use the same to the full extent they could be used by CONTRACTOR (without liability to CONTRACTOR for trespass or conversion), incorporate in the Work all materials and equipment stored at the site or for which OWNER has paid CONTRACTOR but which are stored elsewhere, and finish the Work as OWNER may deem expedient. In such case CONTRACTOR shall not be entitled to receive any further payment until the Work is finished. If the unpaid balance of the Contract Price exceeds all claims, costs, losses, and damages sustained by OWNER arising out of or resulting from completing the Work such excess will be paid to CONTRACTOR. If such claims, costs, losses, and damages exceed such unpaid balance, CONTRACTOR shall pay the difference to OWNER. Such claims, costs, losses, and damages incurred by OWNER will be reviewed by ENGINEER as to their reasonableness and when so approved by ENGINEER incorporated in a Change Order, provided that when exercising any rights or remedies under this paragraph OWNER shall not be required to obtain the lowest price for the Work performed.

- 15.3 Where CONTRACTOR's services have been so terminated by OWNER, the termination will not affect any rights or remedies of OWNER against CONTRACTOR then existing or which may thereafter accrue. Any retention or payment of moneys due CONTRACTOR by OWNER will not release CONTRACTOR from liability.
- 15.4 Upon seven days' written notice to CONTRACTOR and ENGINEER, OWNER may, without cause and without prejudice to any other right or remedy of OWNER, elect to terminate the Agreement. In such case, CONTRACTOR shall be paid (without duplication of any items):

- 15.4.1 for completed and acceptable Work executed in accordance with the Contract Documents prior to the effective date of termination, including fair and reasonable sums for overhead and profit on such Work;
- 15.4.2 for expenses sustained prior to the effective date of termination in performing services and furnishing labor, materials or equipment as required by the Contract Documents in connection with uncompleted Work, plus fair and reasonable sums for overhead and profit on such expenses;
- 15.4.3 for all claims, costs, losses and damages incurred in settlement of terminated contracts with Subcontractors, Suppliers and others; and
- 15.4.4 for reasonable expenses directly attributable to termination.

CONTRACTOR shall not be paid on account of loss of anticipated profits or revenue or other economic loss arising out of or resulting from such termination.

CONTRACTOR May Stop Work or Terminate

- 15.5 If, through no act or fault of CONTRACTOR, the Work is suspended for a period of more than ninety days by OWNER or under an order of court or other public authority, or ENGINEER fails to act on any Application for Payment within thirty days after it is submitted or OWNER fails for thirty days to pay CONTRACTOR any sum finally determined to be due, then CONTRACTOR may, upon seven days' written notice to OWNER and ENGINEER, and provided OWNER or ENGINEER do not remedy such suspension or failure within that time, terminate the Agreement and recover from OWNER payment on the same terms as provided in paragraph 15.4. In lieu of terminating the Agreement and without prejudice to any other right or remedy, if ENGINEER has failed to act on an Application for Payment within thirty days after it is submitted, or OWNER has failed for thirty days to pay CONTRACTOR any sum finally determined to be due, CONTRACTOR may upon seven days' written notice to OWNER and ENGINEER stop the Work until payment of all such amounts due CONTRACTOR, including interest thereon. The provisions of this paragraph 15.5 are not intended to preclude CONTRACTOR from making claim under Articles 11 and 12 for an increase in Contract Price or Contract Times or otherwise for expenses or damage directly attributable to CONTRACTOR's stopping Work as permitted by this paragraph.

Article 16. Miscellaneous

Giving Notice

- 16.1 Whenever any provision of the Contract Documents requires the giving of written notice, it will be deemed to have been validly given if delivered in person to the individual or to a member of the firm or to an officer of the corporation for whom it is intended, or if delivered at or sent by registered or certified mail, postage prepaid, to the last business address known to the giver of the notice.

Computation of Times

- 16.2.1 When any period of time is referred to in the Contract Documents by days, it will be computed to include the first and the last day of such period.

Notice of Claim

- 16.3 Should OWNER or CONTRACTOR suffer injury or damage to person or property because of any error, omission or act of the other party or of any of the other party's employees or agents or others for whose acts the other party is legally liable, claim will be made in writing to the other party within a reasonable time of the first observance of such injury or damage. The provisions of this paragraph 16.3 shall not be construed as a substitute for or a waiver of the provisions of any applicable statute of limitations or repose.

Cumulative Remedies

- 16.4 The duties and obligations imposed by these General Conditions and the rights and remedies available hereunder to the parties hereto, and, in particular but without limitation, the warranties, guarantees, and obligations imposed upon CONTRACTOR by paragraphs 6.12, 6.16, 6.30, 6.31, 6.32, 13.1, 13.12, 13.14, 14.3, and 15.2 and all of the rights and remedies available to OWNER and ENGINEER thereunder, are in addition to, and are not to be construed in any way as a limitation of, any rights and remedies available to any or all of them which are otherwise imposed or available by Laws or Regulations, by special warranty or guarantee or by other provisions of the Contract Documents, and the provisions of this paragraph will be as effective as if repeated specifically in the Contract Documents in connection with each particular duty, obligation, right and remedy to which they apply.

Professional Fees and Court Costs Included

- 16.5 Whenever reference is made to "claims, costs, losses, and damages," it shall include in each case, but not be limited to, all fees and charges of engineers, architects, attorneys and other professionals and all court or arbitration or other dispute resolution costs.

Interest

- 16.6 In the event that any payment of interest is to be made pursuant to any provision of the Contract Documents, excluding any bid bond, labor and materials bond or performance bond entered into by CONTRACTOR, interest shall be paid at the average rate earned by the City of Louisville on its invested funds during the quarterly fiscal period prior to the period during which the interest was accrued.

Third Parties

- 16.7 The contract is not intended to create any right in or for the public or any member thereof, any subcontractor or supplier, or any other third party, or to authorize anyone not a party to the contract to maintain a suit to enforce its terms. The duties, obligations, and responsibilities of the parties to the contract, with respect to third parties, shall remain as imposed by law. This paragraph shall not apply to any surety to the extent it is acting under any labor and materials bond or performance bond entered into by CONTRACTOR.

Severability

- 16.8 To the extent that the performance of the parties' obligations may be accomplished within the intent of the contract, the terms of the contract are severable, and should any term or provision of the contract be declared invalid or become inoperative for any reason, such invalidity or failure shall not affect the validity of any other contract term or provision.

Equal Opportunity Employer

- 16.9 CONTRACTOR will not discriminate against any employee or applicant for employment because of race, color, religion, age, sex, disability, or national origin. CONTRACTOR will take affirmative action to ensure that applicants are employed and that employees are treated during employment without regard for their race, color, religion, age, sex, disability, or national origin. Such action shall include but not be limited to the following: employment, upgrading, demotion or transfer, recruitment or recruitment advertising, layoff or termination, rates of pay or other forms of compensation, and selection for training, including apprenticeship. CONTRACTOR agrees to post in conspicuous places, available to employees and applicants for employment, notice to be provided by an agency of the federal government, setting forth the provisions of the Equal Opportunity Laws.

CONTRACTOR shall be in compliance with the appropriate areas of the Americans with Disabilities Act of 1990 as enacted and from time to time amended and any other applicable federal regulation. A signed, written certificate stating compliance with the Americans with Disabilities Act may be requested at any time during the life of any contract and with any contract entered by OWNER.

Supplementary Conditions

CONDITIONS OF THE CONTRACT

These Supplementary Conditions amend or supplement the General Conditions of the Project Manual as indicated below. All provisions, which are not so amended or supplemented, remain in full force and effect.

1. GC-1 DEFINITIONS

- A. Section 1.9.1, **CONTRACT DAY** of Article 1 of the General Conditions, delete the definition in its entirety and add the following language:

CONTRACT DAY – A calendar day of 24 hours each, excluding Saturdays, Sundays, OWNER-observed holidays and Abnormal Weather days.

- B. Section 1.41, **SUBSTANTIAL COMPLETION** of Article 1 of the General Conditions, add the following language:

The Work will not be considered suitable for Substantial Completion review until all project Bid Items and incidentals in the Work are completed and operational as designed, all designated or required governmental inspections and certifications have been made and posted, designated instruction of OWNER's personnel in the operation of systems has been completed, and all final finishes within the Contract are in place. In general, the only remaining work shall be minor in nature, so that OWNER could occupy the building or utilize the improvements on that date and the completion of the Work by CONTRACTOR would not materially interfere or hamper OWNER's normal operations. As a further condition of Substantial Completion acceptance, CONTRACTOR shall certify that all remaining "punch list" work will be completed within twenty (20) Contract Days after receipt of notification or as agreed upon following the date of issuance of Certificate of Substantial Completion.

2. GC-2 PRELIMINARY MATTERS

- A. Add the following language to Section 2.3 of Article 2 of the General Conditions:

- This contract has three (3) add alternates that will be considered for award. The City may elect to award any combination, or individual alternate, or just the base bid. Should the City add any alternates, and additional 24 contract days will be awarded. The base bid schedule can accommodate some additional time needed to complete the alternates.
- This contract may also serve as an "on-call" patching contract. Additional miscellaneous patching quantities and locations may be added to this contract at established base bid unit prices. Additional mobilization charges may be negotiated. Additional patch work will be awarded on an "as needed" basis and work is expected to be completed expeditiously.
- The City will be replacing concrete sidewalk, curb and gutter, etc. under separate contract. The contractor for the 2025 Street Resurfacing Contract ***may begin patching work before the 2025 Concrete Replacement Contractor has finished***, but shall not begin mill or overlay work at any location until the City has accepted the work completed by the 2025 Concrete Replacement Contractor. Contractor may work in areas alleys as soon as Contract is awarded and business and resident notifications have been issued. Once the 2025 concrete


replacement schedule is made available, the City will share with the 2025 Street Resurfacing Contractor to assist in scheduling. The phasing schedule shown below is contingent upon the concrete work being completed. CONTRACTOR shall not work in more than three (3) phases at the same time, unless otherwise approved by ENGINEER.

- The 2025 Concrete Replacement Contractor is anticipated to begin work in early April and be substantially completed by mid-July.
- **CONTRACTOR shall not park equipment and employee vehicles on abutting side streets that can be used by residents that are directly impacted by the resurfacing.**
- CONTRACTOR shall provide one lane traffic during construction; however, OWNER may permit certain activities to occur under road closure conditions if substantiating information is provided and impact to road users and residents is reduced as approved by ENGINEER. MHTs showing a road closure must be approved a minimum of 5 business days before the closure will begin.
- If Uniformed Traffic Control is required, at no point shall a flagger or Uniformed Traffic Control person be permitted to carry a firearm.
- **All asphalt patching shall be completed prior to asphalt milling activities.**
- Edge milling shall be performed continuously until completed within each phase of work.
- Asphalt leveling shall be performed continuously until completed within each phase of the work. Asphalt leveling shall occur **within 5 contract days** after completion of asphalt milling.
- CONTRACTOR shall restrict vehicular access over newly slurry sealed pavement for a **minimum of 4 hours** unless otherwise approved by ENGINEER. CONTRACTOR to coordinate access to businesses and residences over newly slurry sealed pavement. *Contractor must provide advance notice of this closure to area residents.*
- **Neighborhoods scheduled for full depth reconstruction, including cement treated base must receive advanced notifications of road closures and Contractor shall coordinate trash collection and emergency vehicle access at all times.**
- Lane closures and closures of cul-de-sacs shall be from 7:00 a.m. to 5:00 p.m.
- Construction Phasing for the project shall be as follows:

PHASE	STREET	FROM	TO	CONTRACT DAYS	DATE RESTRICTIONS	ALLOWABLE WORK HOURS	Notes
A	Dogwood Street	Cherry Street	S 104th Street	15	Work must be completed no later than Substantial Completion Date .	MON - THUR - 7am to 5pm FRI - 7am to 3:30pm	<i>Alternate #3</i> - Work in Tech Center. Must coordinate driveway access with businesses. Must coordinate trail closures with Parks Dept. - 7 Days notice
	Taylor Avenue	Cherry Street	S 104th Street				
	Arthur Avenue	Cherry Street	Taylor Avenue				
B	Alley 34	Spruce Street	Walnut Street	15	Work must be completed no later than June 27, 2025 . Work may begin sooner than the completion of earlier phases with PM and inspector agreement.	MON - THUR - 7am to 5pm FRI - 7am to 3:30pm	Downtown Alley Reconstruction. Must coordinate driveway and parking access with neighbors and businesses. Must coordinate trash pickup - 7 Days notice
	Alley 35	Pine Street	Spruce Street				
	Alley 38	Short Street	Caledonia				
C	Johnson Street	Roosevelt Avenue	End	10	Work must be completed no later than Substantial Completion Date . Work may begin sooner than the completion of earlier phases with PM and inspector agreement.	MON - THUR - 7am to 5pm FRI - 7am to 3:30pm	Must coordinate driveway access with residents - 7 Days notice
	Miscellaneous Patching (Alley 29 - Pine to Hutchinson)						
D	Summit View Drive	CO42	Project Limit	5	Work must be completed no later than Substantial Completion Date . Work may begin sooner than the completion of earlier phases with PM and inspector agreement.	MON - THUR - 7am to 5pm FRI - 7am to 3:30pm	Must coordinate driveway access with residents - 7 Days notice
E1	Kennedy Avenue	South Boulder Road	W Linden Street	20	NO WORK prior to May 22, 2025 . Work must be completed no later than August 15, 2025 .	MON - THUR - 7am to 5pm FRI - 7am to 3:30pm	<i>Alternate #2</i> - Must coordinate driveway access with residents. Must coordinate trail crossing work with Parks - 7 Days notice
	Kennedy Avenue	W Willow Street	W Linden Street				
	W Linden Street	Kennedy Avenue	Washington Avenue				
	Hays Court	W Linden Street	End				
	Harrison Court	W Linden Street	End				
	Ford Court	W Linden Street	End				
	Taft Court	W Linden Street	End				
	W Willow Street	Ford Place	Washington Avenue				
	Taft Place	W Willow Street	W Linden Street				
	W Willow Street	Kennedy Avenue	W Willow Street				
	Ford Place	W Willow Street	W Linden Street				
	W Oak Court	Ford Place	End				
	Truman Court	W Willow Street	End				
E2	Raised Crosswalks and Speed Cushion Installation			10	NO WORK prior to May 22, 2025 . Work must be completed no later than June 27, 2025 .	MON - THUR - 7am to 5pm FRI - 7am to 3:30pm	City-wide Raised Crosswalks and Speed Cushions. Striping to be completed immediately after. Signs shall be installed within 3 days of completion
F	Dogwood Circle	W Centennial Drive	Dogwood Circle	10	Work must be completed no later than Substantial Completion Date . Work may begin sooner than the completion of earlier phases with PM and inspector agreement.	MON - THUR - 7am to 5pm FRI - 7am to 3:30pm	Must coordinate driveway access with residents - 7 Days notice
	Dogwood Circle	Dogwood Circle	W Centennial Drive				
	Bobolink Court	Dogwood Circle	End				
	Cliffrose Lane	Dogwood Circle	Dogwood Circle				
G	Jackson Circle	Lafayette Street	Lafayette Street	10	Work must be completed no later than Substantial Completion Date . Work may begin sooner than the completion of earlier phases with PM and inspector agreement.	MON - THUR - 7am to 5pm FRI - 7am to 3:30pm	Must coordinate driveway access with residents - 7 Days notice
	South Place	Jackson Circle	End				
H	Vista Lane	W Mulberry Street	W Mulberry Street	10	NO WORK prior to May 22, 2025 . Work must be completed no later than Substantial Completion Date .	MON - THUR - 7am to 5pm FRI - 7am to 3:30pm	Must coordinate driveway access with residents - 7 Days notice
	Skyview Court	Vista Lane	End				
	Crestview Court	Vista Lane	End				
I	Grove Drive	Washington Avenue	End	15	Work must be completed no later than Substantial Completion Date . Work may begin sooner than the completion of earlier phases with PM and inspector agreement.	MON - THUR - 7am to 5pm FRI - 7am to 3:30pm	Must coordinate driveway access with residents - 7 Days notice
	Meadow Court	Grove Drive	End				
	Harper Lake Drive	Grove Court	End				
	Pikes Peak Court	Washington Avenue	End				
	Pikes Peak Lane	Pikes Peak Court	End				
	Flatirons Court	Washington Avenue	End				
J	Trail Ridge Drive	Washington Avenue	End	15	NO Work Prior to July 21, 2025 - unless authorized by Engineer. Work Must be Completed by August 15, 2025 .	MON - THUR - 7am to 5pm FRI - 7am to 3:30pm	Reconstruction Work in Marshall Fire Burn area. Street Closure and No Driveway Access. Must coordinate street closure with residents and trash pickup - 7 Days notice
	Rock Rose Court	Trail Ridge Drive	End				
	Estes Way	Trail Ridge Drive	Washington Avenue				
K	W Enclave Circle	McCaslin Boulevard	W Enclave Way	15	NO Work Prior to August 1, 2025 - unless authorized by engineer. Work Must be Completed by Substantial Completion Date .	MON - THUR - 7am to 5pm FRI - 7am to 3:30pm	Work in Marshall Fire Burn area. Must coordinate driveway access with residents and contractors - 7 Days notice
	Enclave Circle	W Enclave Way	W Enclave Circle				
	W Enclave Way	W Enclave Circle	McCaslin Boulevard				
	Pine Court	W Enclave Circle	End				
L	Remaining Miscellaneous Patching			NA	Work must be completed prior to July 25, 2025 .	MON - THUR - 7am to 5pm FRI - 7am to 3:30pm	<i>Work can occur simultaneous to other phases.</i> Must coordinate driveway access with neighbors - 7 Days notice

NOTE: It is the contractor's responsibility to schedule work in order to complete all phases within the CONTRACT TIME. It is possible that phases may need to overlap to complete the project on time and by the defined substantial completion date. No more than 3 phases may be in progress at the same time. Contract days shown are days allowed to complete the phase, including all restoration work. Overlap of work is expected. New phases may not be approved to begin if restoration work on previous phases is not complete.

2025 PAVING PROGRAM
PHASING MAP

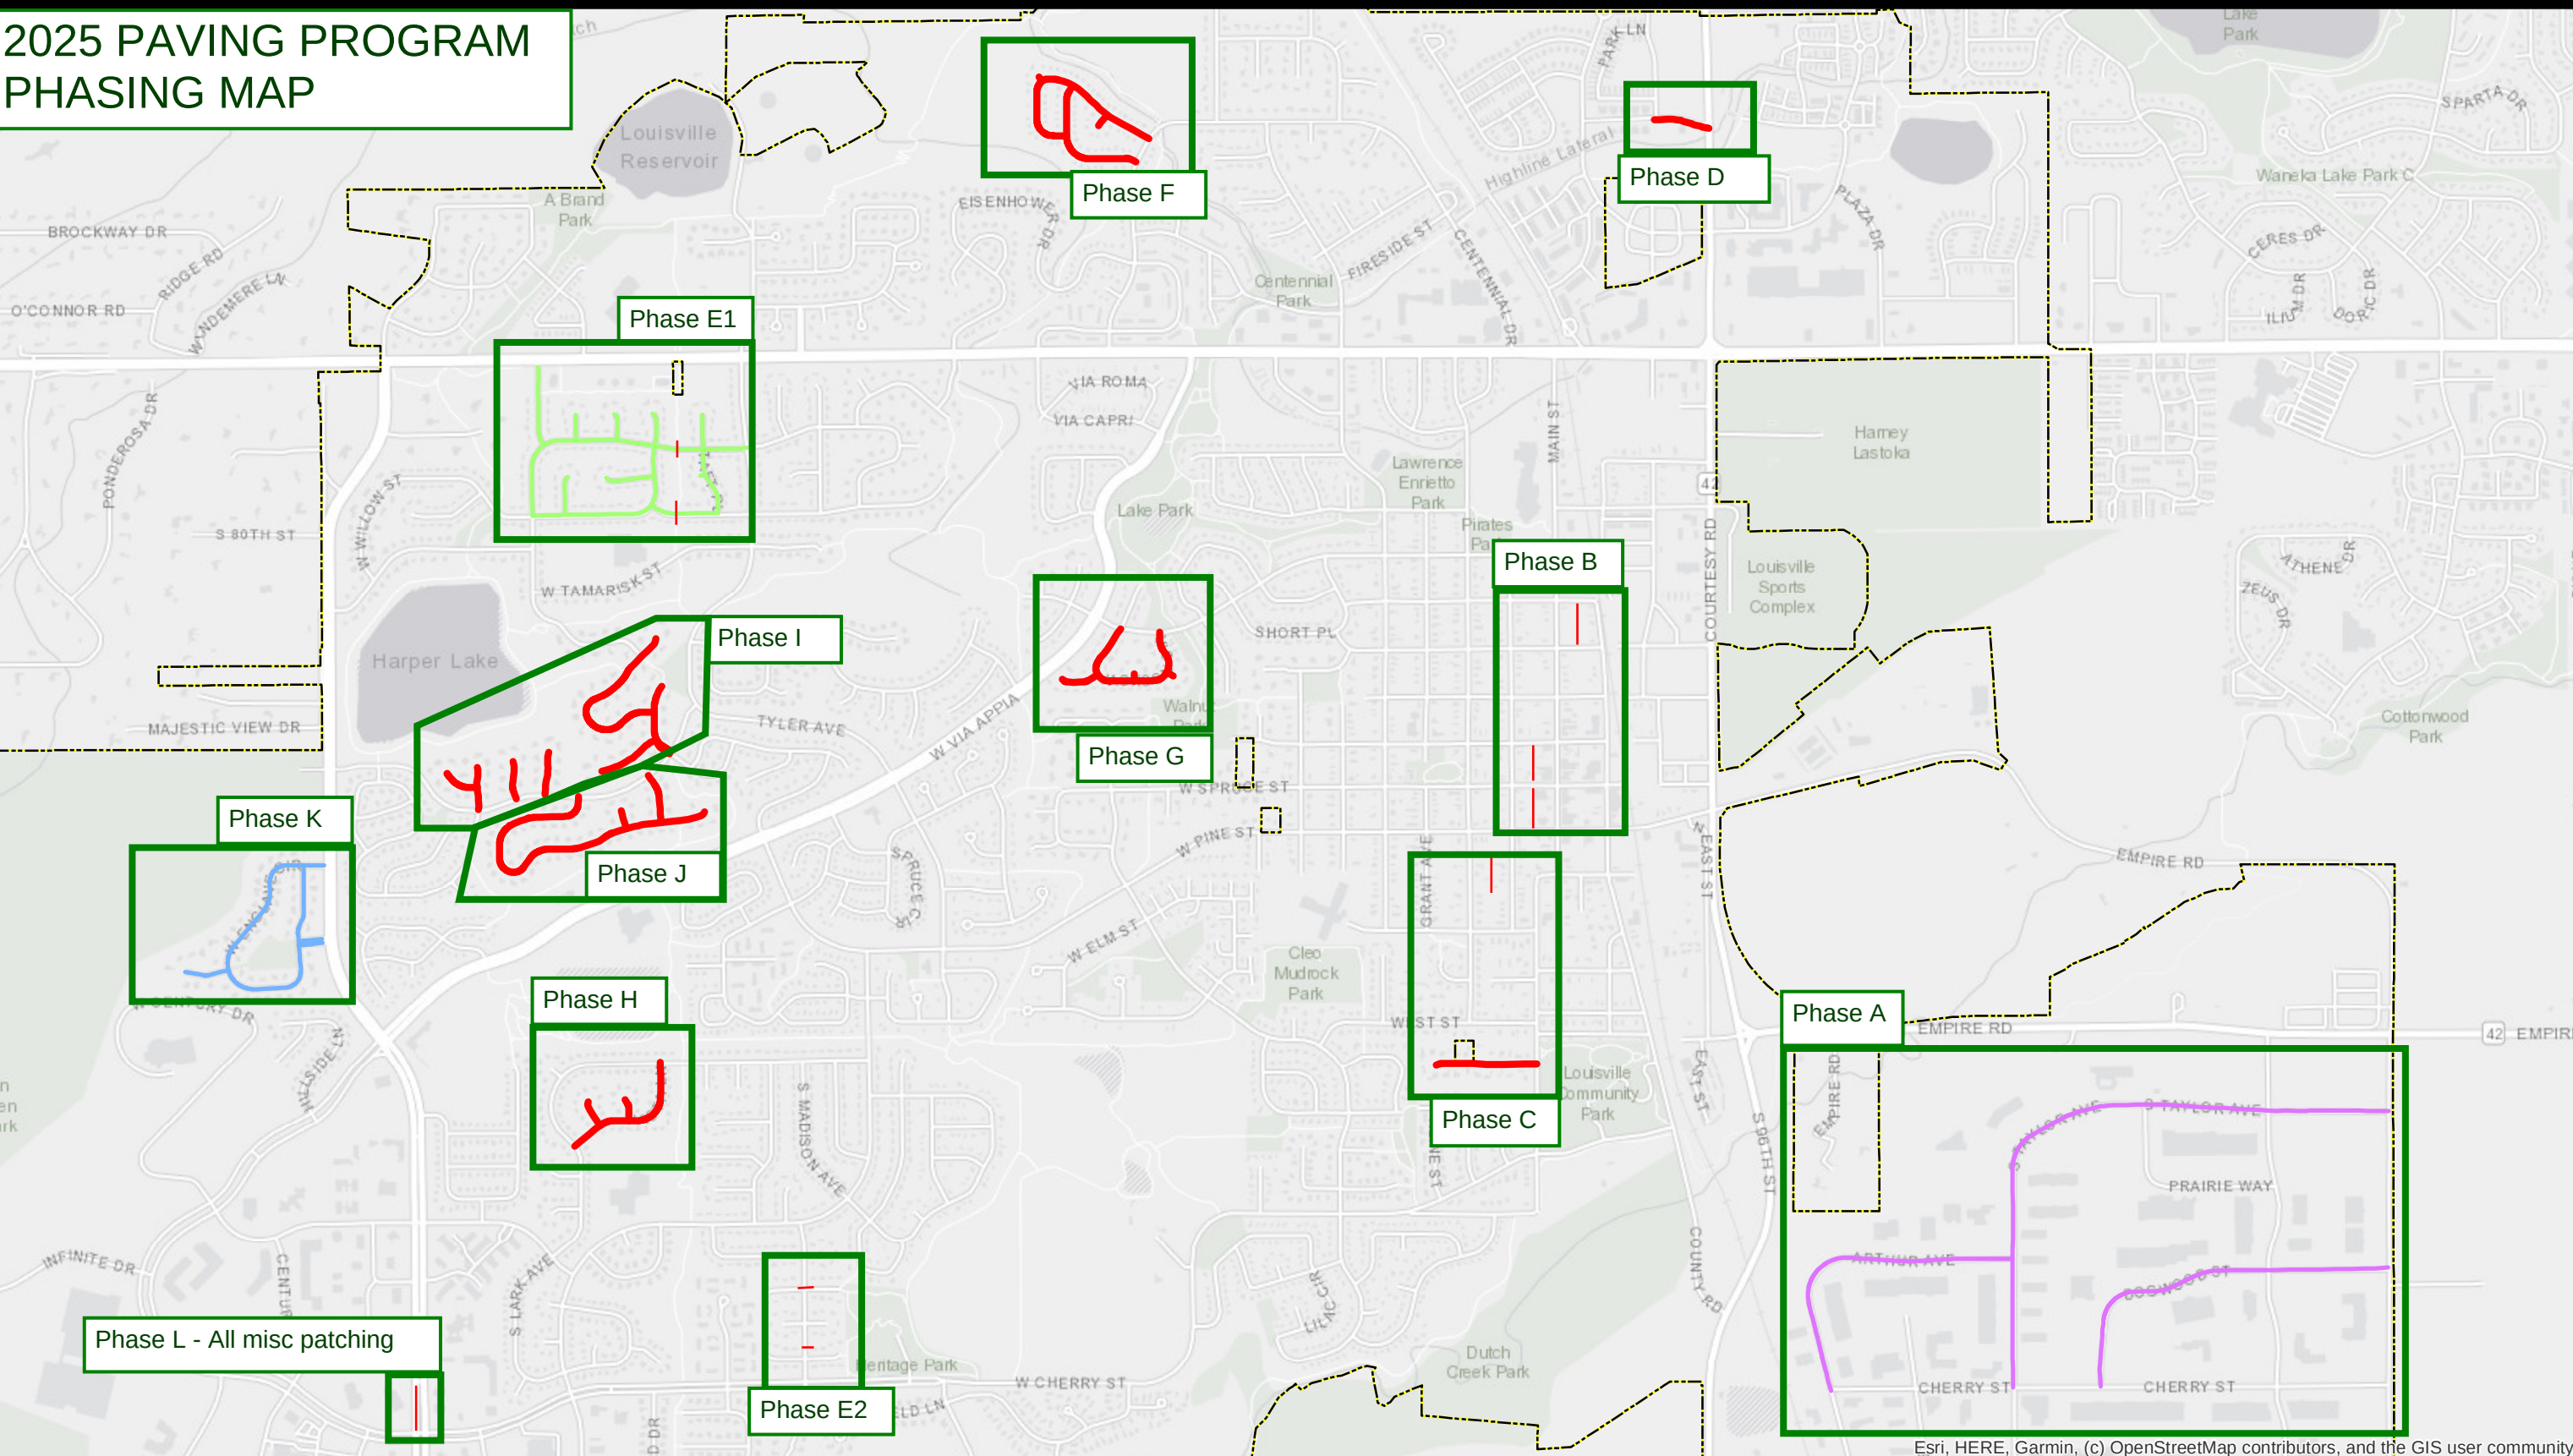

All Phases

- a. Provide ingress, egress to private drives and single access developments. No additional payment will be made to provide access.
- b. Longitudinal Joints – Where asphalt overlay operations occur on a multi-lane travelled roadway, CONTRACTOR shall arrange his paving operations so that there will be no exposed longitudinal joints between adjacent travel lanes at the end of a day's run. Asphalt overlay shall not be applied when weather conditions or the threat of rain may prevent completion of the full width asphalt mat.
- c. Transverse Joints – Provide burlap or paper resin joint with ramp at asphalt mill/limits. Prior to overlay, the burlap or paper resin joint with ramp shall be removed. Dirt joints are strictly prohibited. Where paving begins at a transverse joint that has allowed to cool, the entire joint shall be heated with a propane burner creating a uniform heated material tie-in.

No work shall be performed on City observed Holidays:

- Memorial Day: No work shall be performed from 12 pm May 23 through May 26.
- Juneteenth: No work shall be performed from 12 pm June 18 through June 19.
- July 4th: No work shall be performed from 12 pm July 3 through July 6.
- Labor Day: No work shall be performed from 12 pm August 29 through September 1.

3. GC-4 AVAILABILITY OF LANDS; SUBSURFACE AND PHYSICAL CONDITIONS

- A. Section 4.4, **REFERENCE POINTS**, of Article 4 of the General Conditions, delete the second paragraph in its entirety and add the following language:

OWNER shall not provide survey reference points, construction stakes, lines and grade for the work unless otherwise noted.

4. GC-6 CONTRACTOR'S RESPONSIBILITIES

- A. Labor, Materials and Equipment, delete paragraph 6.3 in its entirety and insert the following:

6.3 CONTRACTOR shall provide competent, suitably qualified personnel to survey, layout and construct the Work as required by the Contract Documents. CONTRACTOR shall at all times maintain good discipline and order at the site. Except as otherwise required for the safety or protection of persons or the Work or property at the site or adjacent thereto, and except as otherwise indicated in the Contract Documents, all Work at the site shall be performed during regular working hours and CONTRACTOR will not permit overtime work or the performance of Work, or at night without OWNER's written consent given after prior written notice to ENGINEER. No extra payment will be paid to the CONTRACTOR by the OWNER due to labor overtime or other increased costs of performing the Work on Friday afternoons, or at night. Should the CONTRACTOR desire to work at night between the hours of 5:00 p.m. and 8:00 p.m., Monday-Thursday, from 3:30 p.m. to 8:00 p.m. Friday, the CONTRACTOR shall submit a written request to the ENGINEER 24 hours prior. If approval is given by ENGINEER to CONTRACTOR for authorized overtime work, ENGINEER's and ENGINEER's authorized personnel will charge overtime and other incidental administrative expenses necessary for performing inspections between the hours of 5:00 p. m. and 8:00 p.m., Monday-Thursday and

3:30 p.m. to 8:00 p.m. Friday, CONTRACTOR will be responsible to pay for all such rates and charges, and shall not be granted a Contract Price increase for such charges. Overtime and other incidental administrative expenses for ENGINEER's and ENGINEER's authorized personnel are as follows:

DESCRIPTION	HOURLY RATE
Engineer	\$60.00
Construction Inspector	\$45.00
Operations Supervisor	\$45.00
Maintenance Worker	\$30.00
Clerical	\$25.00
Vehicle	\$15.00

B. Permits

- a. Paragraph 6.13.2, add the following language:

A deposit is required for the 2" water meter in an amount of \$2500 and the deposit is reimbursed when the 2" meter is returned, in good condition. Charges for water consumption are waived when water is used for this project. Bulk Water Permit and meter are available from the City of Louisville Operations Division, located at 739 S. 104th St.

- b. Paragraph 6.13.3, add the following language:

Right of Way Permit fee is waived for this project.

5. GC-7 OTHER WORK

- A. Section 7.1 of Article 7 of the General Conditions, add the following language:

OWNER has employed a concrete flatwork contractor to replace segments of concrete, curb, gutter, sidewalk, and median cover. CONTRACTOR shall coordinate his activities with the concrete flatwork contractor to allow completion of concrete flatwork prior to asphalt resurfacing.

6. **ARTICLE 9 ENGINEER'S STATUS DURING CONSTRUCTION**

- A. Section 9.3.1 **CONFERENCES AND MEETINGS** of the General Conditions, add the following language:

NEIGHBORHOOD MEETING

At least **10 days** prior to the start of construction in any phase, CONTRACTOR will be required to coordinate and have a representative at a meeting with the residents of the neighborhood. CONTRACTOR is required to hand out notices to all affected residents at least **5 days** prior to the meeting. A template for the notice is below. ENGINEER must review and approve the notice prior to delivery. ENGINEER shall be notified by CONTRACTOR after notices are distributed. At this meeting CONTRACTOR will be required to define the schedule for construction and to address any special needs and concerns of the residents. ENGINEER shall be present at this meeting.

Construction Notification / Neighborhood Meeting Invite

[CONTRACTOR NAME] has been contracted by the City of Louisville to perform the Street Resurfacing Project in 2025. The intent of this work is to repair roadways in the public right-of-way. This work will begin in May or June 2025 and will be preceded by the 2025 Concrete Replacement Project in the same area, which will be performed by a separate contractor. *[Your Neighborhood is scheduled for a "full depth reconstruction". This work will require full closure of the road, except for emergency vehicle access for multiple days and vehicle access to your home will be restricted. You will need to find alternative parking outside the limits of construction during this time. We recognize this is not ideal and is extremely inconvenient, but is necessary to rebuild the road for long term success of the street. We certainly appreciate your patience as we continue to rebuild for the future.]*

A neighborhood meeting is scheduled for [DATE] at [TIME]. The meeting will be located in the Council Chambers at City Hall at 749 Main Street. See map on back of this notice for 2025 concrete and asphalt work locations. Representatives from the City and [CONTRACTOR] will be present to discuss the project.

Topics that will be covered at the meeting will include coordination of work, driveway closures, access to streets and buildings, duration of work, and other topics and questions. For example:

Construction will typically begin at 7 AM and should be completed by 5 PM. Note that delays during the day could require the contractor to work beyond 5 PM on some days. All vehicles will need to be removed from the street by 7:00 AM if "NO PARKING" signs are on your street to allow the contractors access to the area. The "NO PARKING" signs will be placed on your street at least 24 hours prior to work beginning. When work is being performed in front of your address, the process will require that your street/driveway be closed for parking most of the day, so please make arrangements to park any vehicles you need outside the work area. Every effort will be made to have the street open by 5:00 PM.

We hope the coordination will reduce your inconvenience and allow for you to plan accordingly. We appreciate your patience as we repair the street near your address. If you have any questions or concerns or need immediate assistance, please contact [CONTRACTOR] Project Manager [NAME] at [CONTRACTOR PM PHONE NUMBER].

In the event that weather or other delays occur, we may need to reschedule the work and will attempt notify affected residents of any changes.

Attendees can request interpretation services at least 7 days in advance of the meeting (Los asistentes podrán solicitar los servicios de un intérprete con 7 días de anticipación a la fecha una reunion) by contacting Derek Cosson at dcosson@louisvilleco.gov or 303-335-4814.

7. GC-12 CHANGES OF CONTRACT TIMES

- A. Section 12.2 **LIQUIDATED DAMAGES** of Article 12 of the General Conditions, add the following language:

PHASE TIMES – The work is broken into Phases as specified in the Supplementary Conditions with a specific road closure or lane closure limit, described work item with respective day limit, and Substantial Completion date for each Phase. Failure to perform the phase work described in Section 2.3 of the General Conditions will result in liquidated damages. CONTRACTOR shall pay OWNER **ONE THOUSAND DOLLARS (\$1,000.00)** for each and every **Contract Day** and portion thereof that expires after the specified road or lane closure limit days, described work item with respective day limit and Substantial Completion date until the same is finally complete.

- B. Add the following language to Article 12 of the General Conditions:

12.4 EXTENSIONS OF TIME

- a. OWNER and CONTRACTOR are both aware that construction will be conducted during spring and summer and that variable weather conditions are typical for the site of the work.
- b. CONTRACTOR expressly agrees that the Contract Price is based on completion of the work within the times specified in the Agreement and under weather conditions typically encountered during the contemplated construction period at the site of the work.
- c. For purposes of evaluating requests for extensions of time due to abnormal weather conditions, the following conditions, and no others, will be considered unusually severe:
 - 1) Precipitation volume exceeding the historical mean for the months of the construction period by more than one standard deviation.
 - 2) Isolated abnormal weather occurrences of a severely destructive nature, which in fact, cause such destruction at the site of the work.
- d. For the purpose of determining mean conditions, all available data contained in the records of the National Weather Service for reporting from Denver, as well as data available from the State Climatologist for the same areas.

- e. CONTRACTOR further agrees that should a request for time extension due to abnormal weather conditions, CONTRACTOR shall submit all necessary historical and detailed daily data during the construction period to support the claim.

8. GC-13 TESTS AND INSPECTIONS; CORRECTION, REMOVAL OR ACCEPTANCE OF DEFECTIVE WORK

- A. Section 13.11, **CORRECTION OR REMOVAL OF DEFECTIVE WORK** of Article 13 of the General Conditions, add the following language:

Failure or neglect on the part of ENGINEER to condemn unsatisfactory material or reject inferior workmanship will in no way release CONTRACTOR, nor shall it be construed to mean the acceptance of such work, nor shall Final Acceptance bar OWNER from recovering damages in case fraud was practiced, or for defective work resulting from CONTRACTOR's dishonesty.

Work done contrary to or regardless of the instructions of ENGINEER, work done without lines, grade, and/or cross section stakes and grades shown on the Plans or as given by ENGINEER, or any deviation made from the Plans and Specifications without written authority will be considered unauthorized and at the expense of CONTRACTOR and will not be measured or paid for by OWNER. Any and all work so done may be ordered removed and replaced immediately at CONTRACTOR's expense.

SECTION 01010 - SUMMARY OF WORK

PART 1 - GENERAL

1.1 SUMMARY:

1.1.1 PROJECT NAME: 2025 Street Resurfacing Project

1.1.2 PROJECT NUMBER: 301312-660012
PROJECT LOCATION: Louisville, Colorado

1.1.3 OWNER: City of Louisville

1.1.4 WORK INCLUDED: The Work consists of asphalt patching, milling, leveling, signage, pavement marking, and traffic control, including all work appurtenant thereto, on various streets within the City of Louisville, Colorado.

1.1.5 EXHIBIT A - ESTIMATED QUANTITIES PER PLAN SHEET

EXHIBIT A

ESTIMATED QUANTITIES PER PLAN SHEET

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 1A

STREET NAME: ENCLAVE WAY: MCCASLIN BLVD TO W. ENCLAVE CIR.				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 1A	Mobilization	LS	1
2	Alt 1A	Construction Zone Traffic Control	LS	1
3	Alt 1A	Erosion Control	LS	1
4	Alt 1A	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 1A	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	659
6	Alt 1A	Unclassified Excavation (Alley)	SY	
7	Alt 1A	Structural Excavation and Backfill (Street Resurfacing)	CY	11
8	Alt 1A	Structural Excavation and Backfill (Alley)	CY	
9	Alt 1A	Imported Borrow	TON	15
10	Alt 1A	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 1A	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 1A	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	
13	Alt 1A	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 1A	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 1A	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 1A	Cold Mill Patch Grade SX (2")	SY	
17	Alt 1A	Crack Sealant	LBS	
18	Alt 1A	Slurry Seal	SY	
19	Alt 1A	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 1A	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 1A	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 1A	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 1A	Subgrade Cement Treatment	SY	
24	Alt 1A	Hot Asphalt Pavement Grade SX Leveler Course	TON	
25	Alt 1A	Hot Asphalt Pavement Grade S (2.5")	SY	659
26	Alt 1A	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 1A	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	
28	Alt 1A	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	659
29	Alt 1A	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 1A	Skin (Surface) Patching - Grade SX	TON	
31	Alt 1A	Speed Cushion	EA	
32	Alt 1A	Raised Crosswalk (Speed Table)	EA	
33	Alt 1A	Epoxy Pavement Markings	SF	
34	Alt 1A	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 1A	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	68
36	Alt 1A	Remove Sign and Post	EA	
37	Alt 1A	Remove and Replace Sign Post	EA	1
38	Alt 1A	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Alt 1A	Remove and Replace Sign (D3-1)	EA	
40	Alt 1A	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 1A	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 1A	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 1A	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 1B

STREET NAME: W ENCLAVE CIR: W. ENCLAVE WAY TO MCCASLIN BLVD.				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 1B	Mobilization	LS	1
2	Alt 1B	Construction Zone Traffic Control	LS	1
3	Alt 1B	Erosion Control	LS	1
4	Alt 1B	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 1B	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	9836
6	Alt 1B	Unclassified Excavation (Alley)	SY	
7	Alt 1B	Structural Excavation and Backfill (Street Resurfacing)	CY	138
8	Alt 1B	Structural Excavation and Backfill (Alley)	CY	
9	Alt 1B	Imported Borrow	TON	219
10	Alt 1B	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 1B	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 1B	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	
13	Alt 1B	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 1B	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 1B	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 1B	Cold Mill Patch Grade SX (2")	SY	
17	Alt 1B	Crack Sealant	LBS	
18	Alt 1B	Slurry Seal	SY	
19	Alt 1B	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 1B	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 1B	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 1B	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 1B	Subgrade Cement Treatment	SY	
24	Alt 1B	Hot Asphalt Pavement Grade SX Leveler Course	TON	
25	Alt 1B	Hot Asphalt Pavement Grade S (2.5")	SY	9836
26	Alt 1B	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 1B	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	
28	Alt 1B	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	9836
29	Alt 1B	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 1B	Skin (Surface) Patching - Grade SX	TON	
31	Alt 1B	Speed Cushion	EA	
32	Alt 1B	Raised Crosswalk (Speed Table)	EA	
33	Alt 1B	Epoxy Pavement Markings	SF	
34	Alt 1B	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 1B	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	60
36	Alt 1B	Remove Sign and Post	EA	
37	Alt 1B	Remove and Replace Sign Post	EA	
38	Alt 1B	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Alt 1B	Remove and Replace Sign (D3-1)	EA	2
40	Alt 1B	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 1B	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	1
42	Alt 1B	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 1B	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 1C

STREET NAME: W PINE CT: W. ENCLAVE CIR. TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 1C	Mobilization	LS	1
2	Alt 1C	Construction Zone Traffic Control	LS	1
3	Alt 1C	Erosion Control	LS	1
4	Alt 1C	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 1C	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	1609
6	Alt 1C	Unclassified Excavation (Alley)	SY	
7	Alt 1C	Structural Excavation and Backfill (Street Resurfacing)	CY	34
8	Alt 1C	Structural Excavation and Backfill (Alley)	CY	
9	Alt 1C	Imported Borrow	TON	36
10	Alt 1C	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 1C	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 1C	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	
13	Alt 1C	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 1C	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 1C	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 1C	Cold Mill Patch Grade SX (2")	SY	
17	Alt 1C	Crack Sealant	LBS	
18	Alt 1C	Slurry Seal	SY	
19	Alt 1C	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 1C	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 1C	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 1C	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 1C	Subgrade Cement Treatment	SY	
24	Alt 1C	Hot Asphalt Pavement Grade SX Leveler Course	TON	
25	Alt 1C	Hot Asphalt Pavement Grade S (2.5")	SY	1609
26	Alt 1C	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 1C	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	
28	Alt 1C	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	1609
29	Alt 1C	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 1C	Skin (Surface) Patching - Grade SX	TON	
31	Alt 1C	Speed Cushion	EA	
32	Alt 1C	Raised Crosswalk (Speed Table)	EA	
33	Alt 1C	Epoxy Pavement Markings	SF	
34	Alt 1C	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 1C	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	Alt 1C	Remove Sign and Post	EA	
37	Alt 1C	Remove and Replace Sign Post	EA	
38	Alt 1C	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Alt 1C	Remove and Replace Sign (D3-1)	EA	
40	Alt 1C	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 1C	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 1C	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 1C	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 2A

STREET NAME: KENNEDY AVE.: SBR TO W. LINDEN ST				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 2A	Mobilization	LS	1
2	Alt 2A	Construction Zone Traffic Control	LS	1
3	Alt 2A	Erosion Control	LS	1
4	Alt 2A	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 2A	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 2A	Unclassified Excavation (Alley)	SY	
7	Alt 2A	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 2A	Structural Excavation and Backfill (Alley)	CY	
9	Alt 2A	Imported Borrow	TON	
10	Alt 2A	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 2A	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 2A	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	1140
13	Alt 2A	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 2A	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 2A	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 2A	Cold Mill Patch Grade SX (2")	SY	
17	Alt 2A	Crack Sealant	LBS	
18	Alt 2A	Slurry Seal	SY	
19	Alt 2A	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 2A	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 2A	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 2A	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 2A	Subgrade Cement Treatment	SY	
24	Alt 2A	Hot Asphalt Pavement Grade SX Leveler Course	TON	119
25	Alt 2A	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 2A	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 2A	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	2169
28	Alt 2A	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 2A	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 2A	Skin (Surface) Patching - Grade SX	TON	
31	Alt 2A	Speed Cushion	EA	
32	Alt 2A	Raised Crosswalk (Speed Table)	EA	
33	Alt 2A	Epoxy Pavement Markings	SF	66
34	Alt 2A	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 2A	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	80
36	Alt 2A	Remove Sign and Post	EA	
37	Alt 2A	Remove and Replace Sign Post	EA	1
38	Alt 2A	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Alt 2A	Remove and Replace Sign (D3-1)	EA	
40	Alt 2A	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 2A	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 2A	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 2A	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 2B

STREET NAME: KENNEDY AVE.: W LINDEN ST. TO W WILLOW ST				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 2B	Mobilization	LS	1
2	Alt 2B	Construction Zone Traffic Control	LS	1
3	Alt 2B	Erosion Control	LS	1
4	Alt 2B	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 2B	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 2B	Unclassified Excavation (Alley)	SY	
7	Alt 2B	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 2B	Structural Excavation and Backfill (Alley)	CY	
9	Alt 2B	Imported Borrow	TON	
10	Alt 2B	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 2B	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 2B	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	1032
13	Alt 2B	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 2B	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 2B	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 2B	Cold Mill Patch Grade SX (2")	SY	
17	Alt 2B	Crack Sealant	LBS	
18	Alt 2B	Slurry Seal	SY	
19	Alt 2B	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 2B	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 2B	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 2B	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 2B	Subgrade Cement Treatment	SY	
24	Alt 2B	Hot Asphalt Pavement Grade SX Leveler Course	TON	109
25	Alt 2B	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 2B	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 2B	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1975
28	Alt 2B	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 2B	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 2B	Skin (Surface) Patching - Grade SX	TON	
31	Alt 2B	Speed Cushion	EA	
32	Alt 2B	Raised Crosswalk (Speed Table)	EA	
33	Alt 2B	Epoxy Pavement Markings	SF	
34	Alt 2B	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 2B	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	Alt 2B	Remove Sign and Post	EA	
37	Alt 2B	Remove and Replace Sign Post	EA	
38	Alt 2B	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Alt 2B	Remove and Replace Sign (D3-1)	EA	
40	Alt 2B	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 2B	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 2B	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 2B	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 2C

STREET NAME: W. LINDEN ST: KENNEDY AVE TO WASHINGTON AVE				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 2C	Mobilization	LS	1
2	Alt 2C	Construction Zone Traffic Control	LS	1
3	Alt 2C	Erosion Control	LS	1
4	Alt 2C	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 2C	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 2C	Unclassified Excavation (Alley)	SY	
7	Alt 2C	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 2C	Structural Excavation and Backfill (Alley)	CY	
9	Alt 2C	Imported Borrow	TON	
10	Alt 2C	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	1
11	Alt 2C	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 2C	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	2733
13	Alt 2C	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 2C	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 2C	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 2C	Cold Mill Patch Grade SX (2")	SY	
17	Alt 2C	Crack Sealant	LBS	
18	Alt 2C	Slurry Seal	SY	
19	Alt 2C	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 2C	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 2C	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 2C	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 2C	Subgrade Cement Treatment	SY	
24	Alt 2C	Hot Asphalt Pavement Grade SX Leveler Course	TON	
25	Alt 2C	Hot Asphalt Pavement Grade S (2.5")	SY	296
26	Alt 2C	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 2C	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	5375
28	Alt 2C	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 2C	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 2C	Skin (Surface) Patching - Grade SX	TON	
31	Alt 2C	Speed Cushion	EA	
32	Alt 2C	Raised Crosswalk (Speed Table)	EA	1
33	Alt 2C	Epoxy Pavement Markings	SF	
34	Alt 2C	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 2C	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	178
36	Alt 2C	Remove Sign and Post	EA	3
37	Alt 2C	Remove and Replace Sign Post	EA	
38	Alt 2C	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Alt 2C	Remove and Replace Sign (D3-1)	EA	
40	Alt 2C	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 2C	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 2C	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	2
43	Alt 2C	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	2

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 2D

STREET NAME: HAYS CT: W LINDEN TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 2D	Mobilization	LS	1
2	Alt 2D	Construction Zone Traffic Control	LS	1
3	Alt 2D	Erosion Control	LS	1
4	Alt 2D	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 2D	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 2D	Unclassified Excavation (Alley)	SY	
7	Alt 2D	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 2D	Structural Excavation and Backfill (Alley)	CY	
9	Alt 2D	Imported Borrow	TON	
10	Alt 2D	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 2D	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 2D	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	463
13	Alt 2D	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 2D	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 2D	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 2D	Cold Mill Patch Grade SX (2")	SY	
17	Alt 2D	Crack Sealant	LBS	
18	Alt 2D	Slurry Seal	SY	
19	Alt 2D	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 2D	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 2D	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 2D	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 2D	Subgrade Cement Treatment	SY	
24	Alt 2D	Hot Asphalt Pavement Grade SX Leveler Course	TON	51
25	Alt 2D	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 2D	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 2D	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	933
28	Alt 2D	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 2D	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 2D	Skin (Surface) Patching - Grade SX	TON	
31	Alt 2D	Speed Cushion	EA	
32	Alt 2D	Raised Crosswalk (Speed Table)	EA	
33	Alt 2D	Epoxy Pavement Markings	SF	
34	Alt 2D	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 2D	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	Alt 2D	Remove Sign and Post	EA	
37	Alt 2D	Remove and Replace Sign Post	EA	
38	Alt 2D	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	1
39	Alt 2D	Remove and Replace Sign (D3-1)	EA	
40	Alt 2D	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 2D	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 2D	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 2D	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 2E

STREET NAME: HARRISON CT: W LINDEN ST TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 2E	Mobilization	LS	1
2	Alt 2E	Construction Zone Traffic Control	LS	1
3	Alt 2E	Erosion Control	LS	1
4	Alt 2E	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 2E	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 2E	Unclassified Excavation (Alley)	SY	
7	Alt 2E	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 2E	Structural Excavation and Backfill (Alley)	CY	
9	Alt 2E	Imported Borrow	TON	
10	Alt 2E	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 2E	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 2E	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	474
13	Alt 2E	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 2E	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 2E	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 2E	Cold Mill Patch Grade SX (2")	SY	
17	Alt 2E	Crack Sealant	LBS	
18	Alt 2E	Slurry Seal	SY	
19	Alt 2E	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 2E	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 2E	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 2E	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 2E	Subgrade Cement Treatment	SY	
24	Alt 2E	Hot Asphalt Pavement Grade SX Leveler Course	TON	54
25	Alt 2E	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 2E	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 2E	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	974
28	Alt 2E	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 2E	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 2E	Skin (Surface) Patching - Grade SX	TON	
31	Alt 2E	Speed Cushion	EA	
32	Alt 2E	Raised Crosswalk (Speed Table)	EA	
33	Alt 2E	Epoxy Pavement Markings	SF	
34	Alt 2E	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 2E	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	Alt 2E	Remove Sign and Post	EA	
37	Alt 2E	Remove and Replace Sign Post	EA	
38	Alt 2E	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Alt 2E	Remove and Replace Sign (D3-1)	EA	
40	Alt 2E	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 2E	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 2E	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 2E	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 2F

STREET NAME: FORD CT: W LINDEN ST TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 2F	Mobilization	LS	1
2	Alt 2F	Construction Zone Traffic Control	LS	1
3	Alt 2F	Erosion Control	LS	1
4	Alt 2F	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 2F	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 2F	Unclassified Excavation (Alley)	SY	
7	Alt 2F	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 2F	Structural Excavation and Backfill (Alley)	CY	
9	Alt 2F	Imported Borrow	TON	
10	Alt 2F	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 2F	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 2F	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	559
13	Alt 2F	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 2F	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 2F	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 2F	Cold Mill Patch Grade SX (2")	SY	
17	Alt 2F	Crack Sealant	LBS	
18	Alt 2F	Slurry Seal	SY	
19	Alt 2F	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 2F	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 2F	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 2F	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 2F	Subgrade Cement Treatment	SY	
24	Alt 2F	Hot Asphalt Pavement Grade SX Leveler Course	TON	62
25	Alt 2F	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 2F	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 2F	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1122
28	Alt 2F	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 2F	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 2F	Skin (Surface) Patching - Grade SX	TON	
31	Alt 2F	Speed Cushion	EA	
32	Alt 2F	Raised Crosswalk (Speed Table)	EA	
33	Alt 2F	Epoxy Pavement Markings	SF	
34	Alt 2F	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 2F	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	Alt 2F	Remove Sign and Post	EA	
37	Alt 2F	Remove and Replace Sign Post	EA	
38	Alt 2F	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Alt 2F	Remove and Replace Sign (D3-1)	EA	
40	Alt 2F	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 2F	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 2F	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 2F	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 2G

STREET NAME: TAFT CT: W LINDEN ST TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 2G	Mobilization	LS	1
2	Alt 2G	Construction Zone Traffic Control	LS	1
3	Alt 2G	Erosion Control	LS	1
4	Alt 2G	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 2G	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 2G	Unclassified Excavation (Alley)	SY	
7	Alt 2G	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 2G	Structural Excavation and Backfill (Alley)	CY	
9	Alt 2G	Imported Borrow	TON	
10	Alt 2G	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 2G	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 2G	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	580
13	Alt 2G	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 2G	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 2G	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 2G	Cold Mill Patch Grade SX (2")	SY	
17	Alt 2G	Crack Sealant	LBS	
18	Alt 2G	Slurry Seal	SY	
19	Alt 2G	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 2G	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 2G	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 2G	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 2G	Subgrade Cement Treatment	SY	
24	Alt 2G	Hot Asphalt Pavement Grade SX Leveler Course	TON	65
25	Alt 2G	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 2G	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 2G	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1179
28	Alt 2G	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 2G	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 2G	Skin (Surface) Patching - Grade SX	TON	
31	Alt 2G	Speed Cushion	EA	
32	Alt 2G	Raised Crosswalk (Speed Table)	EA	
33	Alt 2G	Epoxy Pavement Markings	SF	
34	Alt 2G	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 2G	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	30
36	Alt 2G	Remove Sign and Post	EA	
37	Alt 2G	Remove and Replace Sign Post	EA	
38	Alt 2G	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Alt 2G	Remove and Replace Sign (D3-1)	EA	
40	Alt 2G	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 2G	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 2G	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 2G	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 2H

STREET NAME: TAFT PL: W WILLOW ST TO W LINDEN ST				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 2H	Mobilization	LS	1
2	Alt 2H	Construction Zone Traffic Control	LS	1
3	Alt 2H	Erosion Control	LS	1
4	Alt 2H	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 2H	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 2H	Unclassified Excavation (Alley)	SY	
7	Alt 2H	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 2H	Structural Excavation and Backfill (Alley)	CY	
9	Alt 2H	Imported Borrow	TON	
10	Alt 2H	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 2H	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 2H	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	973
13	Alt 2H	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 2H	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 2H	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 2H	Cold Mill Patch Grade SX (2")	SY	
17	Alt 2H	Crack Sealant	LBS	
18	Alt 2H	Slurry Seal	SY	
19	Alt 2H	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 2H	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 2H	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 2H	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 2H	Subgrade Cement Treatment	SY	
24	Alt 2H	Hot Asphalt Pavement Grade SX Leveler Course	TON	117
25	Alt 2H	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 2H	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 2H	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	2119
28	Alt 2H	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 2H	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 2H	Skin (Surface) Patching - Grade SX	TON	
31	Alt 2H	Speed Cushion	EA	
32	Alt 2H	Raised Crosswalk (Speed Table)	EA	
33	Alt 2H	Epoxy Pavement Markings	SF	64
34	Alt 2H	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 2H	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	Alt 2H	Remove Sign and Post	EA	
37	Alt 2H	Remove and Replace Sign Post	EA	
38	Alt 2H	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Alt 2H	Remove and Replace Sign (D3-1)	EA	
40	Alt 2H	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 2H	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 2H	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 2H	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 2I

STREET NAME: W. WILLOW ST: KENNEDY AVE TO FORD PL				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 2I	Mobilization	LS	1
2	Alt 2I	Construction Zone Traffic Control	LS	1
3	Alt 2I	Erosion Control	LS	1
4	Alt 2I	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 2I	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 2I	Unclassified Excavation (Alley)	SY	
7	Alt 2I	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 2I	Structural Excavation and Backfill (Alley)	CY	
9	Alt 2I	Imported Borrow	TON	
10	Alt 2I	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 2I	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 2I	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	1675
13	Alt 2I	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 2I	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 2I	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 2I	Cold Mill Patch Grade SX (2")	SY	
17	Alt 2I	Crack Sealant	LBS	
18	Alt 2I	Slurry Seal	SY	
19	Alt 2I	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 2I	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 2I	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 2I	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 2I	Subgrade Cement Treatment	SY	
24	Alt 2I	Hot Asphalt Pavement Grade SX Leveler Course	TON	179
25	Alt 2I	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 2I	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 2I	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	3261
28	Alt 2I	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 2I	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 2I	Skin (Surface) Patching - Grade SX	TON	
31	Alt 2I	Speed Cushion	EA	
32	Alt 2I	Raised Crosswalk (Speed Table)	EA	
33	Alt 2I	Epoxy Pavement Markings	SF	
34	Alt 2I	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 2I	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	Alt 2I	Remove Sign and Post	EA	
37	Alt 2I	Remove and Replace Sign Post	EA	
38	Alt 2I	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	1
39	Alt 2I	Remove and Replace Sign (D3-1)	EA	
40	Alt 2I	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 2I	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 2I	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 2I	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 2J

STREET NAME: W. WILLOW ST: FORD PL TO WASHINGTON AVE				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 2J	Mobilization	LS	1
2	Alt 2J	Construction Zone Traffic Control	LS	1
3	Alt 2J	Erosion Control	LS	1
4	Alt 2J	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 2J	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 2J	Unclassified Excavation (Alley)	SY	
7	Alt 2J	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 2J	Structural Excavation and Backfill (Alley)	CY	
9	Alt 2J	Imported Borrow	TON	
10	Alt 2J	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 2J	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 2J	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	1375
13	Alt 2J	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 2J	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 2J	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 2J	Cold Mill Patch Grade SX (2")	SY	
17	Alt 2J	Crack Sealant	LBS	
18	Alt 2J	Slurry Seal	SY	
19	Alt 2J	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 2J	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 2J	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 2J	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 2J	Subgrade Cement Treatment	SY	
24	Alt 2J	Hot Asphalt Pavement Grade SX Leveler Course	TON	145
25	Alt 2J	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 2J	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 2J	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	2644
28	Alt 2J	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 2J	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 2J	Skin (Surface) Patching - Grade SX	TON	
31	Alt 2J	Speed Cushion	EA	
32	Alt 2J	Raised Crosswalk (Speed Table)	EA	1
33	Alt 2J	Epoxy Pavement Markings	SF	
34	Alt 2J	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 2J	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	180
36	Alt 2J	Remove Sign and Post	EA	4
37	Alt 2J	Remove and Replace Sign Post	EA	
38	Alt 2J	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	1
39	Alt 2J	Remove and Replace Sign (D3-1)	EA	
40	Alt 2J	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 2J	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 2J	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	2
43	Alt 2J	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	2

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 2K

STREET NAME: FORD PL: W WILLOW ST TO W LINDEN ST				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 2K	Mobilization	LS	1
2	Alt 2K	Construction Zone Traffic Control	LS	1
3	Alt 2K	Erosion Control	LS	1
4	Alt 2K	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 2K	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 2K	Unclassified Excavation (Alley)	SY	
7	Alt 2K	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 2K	Structural Excavation and Backfill (Alley)	CY	
9	Alt 2K	Imported Borrow	TON	
10	Alt 2K	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	1
11	Alt 2K	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 2K	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	770
13	Alt 2K	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 2K	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 2K	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 2K	Cold Mill Patch Grade SX (2")	SY	
17	Alt 2K	Crack Sealant	LBS	
18	Alt 2K	Slurry Seal	SY	
19	Alt 2K	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 2K	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 2K	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 2K	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 2K	Subgrade Cement Treatment	SY	
24	Alt 2K	Hot Asphalt Pavement Grade SX Leveler Course	TON	84
25	Alt 2K	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 2K	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 2K	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1520
28	Alt 2K	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 2K	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 2K	Skin (Surface) Patching - Grade SX	TON	
31	Alt 2K	Speed Cushion	EA	
32	Alt 2K	Raised Crosswalk (Speed Table)	EA	
33	Alt 2K	Epoxy Pavement Markings	SF	
34	Alt 2K	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 2K	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	Alt 2K	Remove Sign and Post	EA	
37	Alt 2K	Remove and Replace Sign Post	EA	
38	Alt 2K	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Alt 2K	Remove and Replace Sign (D3-1)	EA	
40	Alt 2K	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 2K	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 2K	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 2K	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 2L

STREET NAME: W OAK CT: FORD PL TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 2L	Mobilization	LS	1
2	Alt 2L	Construction Zone Traffic Control	LS	1
3	Alt 2L	Erosion Control	LS	1
4	Alt 2L	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 2L	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 2L	Unclassified Excavation (Alley)	SY	
7	Alt 2L	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 2L	Structural Excavation and Backfill (Alley)	CY	
9	Alt 2L	Imported Borrow	TON	
10	Alt 2L	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 2L	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 2L	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	775
13	Alt 2L	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 2L	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 2L	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 2L	Cold Mill Patch Grade SX (2")	SY	
17	Alt 2L	Crack Sealant	LBS	
18	Alt 2L	Slurry Seal	SY	
19	Alt 2L	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 2L	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 2L	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 2L	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 2L	Subgrade Cement Treatment	SY	
24	Alt 2L	Hot Asphalt Pavement Grade SX Leveler Course	TON	85
25	Alt 2L	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 2L	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 2L	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1542
28	Alt 2L	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 2L	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 2L	Skin (Surface) Patching - Grade SX	TON	
31	Alt 2L	Speed Cushion	EA	
32	Alt 2L	Raised Crosswalk (Speed Table)	EA	
33	Alt 2L	Epoxy Pavement Markings	SF	
34	Alt 2L	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 2L	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	Alt 2L	Remove Sign and Post	EA	
37	Alt 2L	Remove and Replace Sign Post	EA	
38	Alt 2L	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Alt 2L	Remove and Replace Sign (D3-1)	EA	
40	Alt 2L	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 2L	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 2L	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 2L	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 2M

STREET NAME: TRUMAN CT: W WILLOW ST TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 2M	Mobilization	LS	1
2	Alt 2M	Construction Zone Traffic Control	LS	1
3	Alt 2M	Erosion Control	LS	1
4	Alt 2M	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 2M	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 2M	Unclassified Excavation (Alley)	SY	
7	Alt 2M	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 2M	Structural Excavation and Backfill (Alley)	CY	
9	Alt 2M	Imported Borrow	TON	
10	Alt 2M	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 2M	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 2M	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	646
13	Alt 2M	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 2M	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 2M	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 2M	Cold Mill Patch Grade SX (2")	SY	
17	Alt 2M	Crack Sealant	LBS	
18	Alt 2M	Slurry Seal	SY	
19	Alt 2M	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 2M	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 2M	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 2M	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Alt 2M	Subgrade Cement Treatment	SY	
24	Alt 2M	Hot Asphalt Pavement Grade SX Leveler Course	TON	70
25	Alt 2M	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 2M	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 2M	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1279
28	Alt 2M	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 2M	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 2M	Skin (Surface) Patching - Grade SX	TON	
31	Alt 2M	Speed Cushion	EA	
32	Alt 2M	Raised Crosswalk (Speed Table)	EA	
33	Alt 2M	Epoxy Pavement Markings	SF	
34	Alt 2M	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 2M	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	Alt 2M	Remove Sign and Post	EA	
37	Alt 2M	Remove and Replace Sign Post	EA	
38	Alt 2M	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Alt 2M	Remove and Replace Sign (D3-1)	EA	
40	Alt 2M	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 2M	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 2M	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 2M	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 3A

STREET NAME: DOGWOOD ST.: CTC BLVD TO CHERRY ST				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 3A	Mobilization	LS	1
2	Alt 3A	Construction Zone Traffic Control	LS	1
3	Alt 3A	Erosion Control	LS	1
4	Alt 3A	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 3A	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 3A	Unclassified Excavation (Alley)	SY	
7	Alt 3A	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 3A	Structural Excavation and Backfill (Alley)	CY	
9	Alt 3A	Imported Borrow	TON	
10	Alt 3A	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 3A	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 3A	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	
13	Alt 3A	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 3A	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 3A	Cold Mill Patch Grade SX (1.5")	SY	433
16	Alt 3A	Cold Mill Patch Grade SX (2")	SY	
17	Alt 3A	Crack Sealant	LBS	1298
18	Alt 3A	Slurry Seal	SY	7210
19	Alt 3A	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 3A	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 3A	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 3A	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	91
23	Alt 3A	Subgrade Cement Treatment	SY	
24	Alt 3A	Hot Asphalt Pavement Grade SX Leveler Course	TON	
25	Alt 3A	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 3A	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 3A	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	
28	Alt 3A	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 3A	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 3A	Skin (Surface) Patching - Grade SX	TON	
31	Alt 3A	Speed Cushion	EA	
32	Alt 3A	Raised Crosswalk (Speed Table)	EA	
33	Alt 3A	Epoxy Pavement Markings	SF	
34	Alt 3A	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 3A	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	86
36	Alt 3A	Remove Sign and Post	EA	
37	Alt 3A	Remove and Replace Sign Post	EA	
38	Alt 3A	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	1
39	Alt 3A	Remove and Replace Sign (D3-1)	EA	
40	Alt 3A	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 3A	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 3A	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 3A	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 3B

STREET NAME: DOGWOOD ST.: S 104TH ST TO CTC BLVD				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 3B	Mobilization	LS	1
2	Alt 3B	Construction Zone Traffic Control	LS	1
3	Alt 3B	Erosion Control	LS	1
4	Alt 3B	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 3B	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 3B	Unclassified Excavation (Alley)	SY	
7	Alt 3B	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 3B	Structural Excavation and Backfill (Alley)	CY	
9	Alt 3B	Imported Borrow	TON	
10	Alt 3B	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 3B	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 3B	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	
13	Alt 3B	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 3B	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 3B	Cold Mill Patch Grade SX (1.5")	SY	30
16	Alt 3B	Cold Mill Patch Grade SX (2")	SY	
17	Alt 3B	Crack Sealant	LBS	582
18	Alt 3B	Slurry Seal	SY	3231
19	Alt 3B	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 3B	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 3B	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 3B	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	51
23	Alt 3B	Subgrade Cement Treatment	SY	
24	Alt 3B	Hot Asphalt Pavement Grade SX Leveler Course	TON	
25	Alt 3B	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 3B	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 3B	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	
28	Alt 3B	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 3B	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 3B	Skin (Surface) Patching - Grade SX	TON	
31	Alt 3B	Speed Cushion	EA	
32	Alt 3B	Raised Crosswalk (Speed Table)	EA	
33	Alt 3B	Epoxy Pavement Markings	SF	
34	Alt 3B	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 3B	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	70
36	Alt 3B	Remove Sign and Post	EA	
37	Alt 3B	Remove and Replace Sign Post	EA	
38	Alt 3B	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	1
39	Alt 3B	Remove and Replace Sign (D3-1)	EA	
40	Alt 3B	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 3B	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 3B	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 3B	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 3C

STREET NAME: TAYLOR AVE.: S 104TH ST TO CTC BLVD				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 3C	Mobilization	LS	1
2	Alt 3C	Construction Zone Traffic Control	LS	1
3	Alt 3C	Erosion Control	LS	1
4	Alt 3C	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 3C	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 3C	Unclassified Excavation (Alley)	SY	
7	Alt 3C	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 3C	Structural Excavation and Backfill (Alley)	CY	
9	Alt 3C	Imported Borrow	TON	
10	Alt 3C	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 3C	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 3C	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	1457
13	Alt 3C	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 3C	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 3C	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 3C	Cold Mill Patch Grade SX (2")	SY	
17	Alt 3C	Crack Sealant	LBS	
18	Alt 3C	Slurry Seal	SY	
19	Alt 3C	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 3C	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 3C	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 3C	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	38
23	Alt 3C	Subgrade Cement Treatment	SY	
24	Alt 3C	Hot Asphalt Pavement Grade SX Leveler Course	TON	159
25	Alt 3C	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 3C	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 3C	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	2889
28	Alt 3C	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 3C	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 3C	Skin (Surface) Patching - Grade SX	TON	
31	Alt 3C	Speed Cushion	EA	
32	Alt 3C	Raised Crosswalk (Speed Table)	EA	
33	Alt 3C	Epoxy Pavement Markings	SF	116
34	Alt 3C	Thermoplastic Pavement Markings (Words and Symbols)	SF	16
35	Alt 3C	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	60
36	Alt 3C	Remove Sign and Post	EA	
37	Alt 3C	Remove and Replace Sign Post	EA	
38	Alt 3C	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	1
39	Alt 3C	Remove and Replace Sign (D3-1)	EA	
40	Alt 3C	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 3C	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 3C	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 3C	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 3D

STREET NAME: TAYLOR AVE.: CTC BLVD TO CHERRY ST				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 3D	Mobilization	LS	1
2	Alt 3D	Construction Zone Traffic Control	LS	1
3	Alt 3D	Erosion Control	LS	1
4	Alt 3D	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 3D	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 3D	Unclassified Excavation (Alley)	SY	
7	Alt 3D	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 3D	Structural Excavation and Backfill (Alley)	CY	
9	Alt 3D	Imported Borrow	TON	
10	Alt 3D	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 3D	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 3D	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	6842
13	Alt 3D	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 3D	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 3D	Cold Mill Patch Grade SX (1.5")	SY	
16	Alt 3D	Cold Mill Patch Grade SX (2")	SY	34
17	Alt 3D	Crack Sealant	LBS	
18	Alt 3D	Slurry Seal	SY	
19	Alt 3D	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 3D	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 3D	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 3D	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	117
23	Alt 3D	Subgrade Cement Treatment	SY	
24	Alt 3D	Hot Asphalt Pavement Grade SX Leveler Course	TON	818
25	Alt 3D	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 3D	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 3D	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	14866
28	Alt 3D	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 3D	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 3D	Skin (Surface) Patching - Grade SX	TON	
31	Alt 3D	Speed Cushion	EA	
32	Alt 3D	Raised Crosswalk (Speed Table)	EA	
33	Alt 3D	Epoxy Pavement Markings	SF	
34	Alt 3D	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 3D	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	70
36	Alt 3D	Remove Sign and Post	EA	
37	Alt 3D	Remove and Replace Sign Post	EA	
38	Alt 3D	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Alt 3D	Remove and Replace Sign (D3-1)	EA	
40	Alt 3D	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 3D	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 3D	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 3D	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Alt 3E

STREET NAME: ARTHUR AVE.: TAYLOR AVE TO CHERRY ST				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Alt 3E	Mobilization	LS	1
2	Alt 3E	Construction Zone Traffic Control	LS	1
3	Alt 3E	Erosion Control	LS	1
4	Alt 3E	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Alt 3E	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Alt 3E	Unclassified Excavation (Alley)	SY	
7	Alt 3E	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Alt 3E	Structural Excavation and Backfill (Alley)	CY	
9	Alt 3E	Imported Borrow	TON	
10	Alt 3E	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Alt 3E	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Alt 3E	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	4413
13	Alt 3E	Cold Milling Asphalt Pavement (1.5")	SY	
14	Alt 3E	Cold Milling Asphalt Pavement (2")	SY	
15	Alt 3E	Cold Mill Patch Grade SX (1.5")	SY	46
16	Alt 3E	Cold Mill Patch Grade SX (2")	SY	
17	Alt 3E	Crack Sealant	LBS	
18	Alt 3E	Slurry Seal	SY	
19	Alt 3E	Hot Asphalt Patch Grade SX (4")	SY	
20	Alt 3E	Hot Asphalt Patch Grade SX (6")	SY	
21	Alt 3E	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Alt 3E	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	57
23	Alt 3E	Subgrade Cement Treatment	SY	
24	Alt 3E	Hot Asphalt Pavement Grade SX Leveler Course	TON	508
25	Alt 3E	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Alt 3E	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Alt 3E	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	9229
28	Alt 3E	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Alt 3E	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Alt 3E	Skin (Surface) Patching - Grade SX	TON	
31	Alt 3E	Speed Cushion	EA	
32	Alt 3E	Raised Crosswalk (Speed Table)	EA	
33	Alt 3E	Epoxy Pavement Markings	SF	
34	Alt 3E	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Alt 3E	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	30
36	Alt 3E	Remove Sign and Post	EA	
37	Alt 3E	Remove and Replace Sign Post	EA	
38	Alt 3E	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Alt 3E	Remove and Replace Sign (D3-1)	EA	
40	Alt 3E	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Alt 3E	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Alt 3E	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Alt 3E	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: A

STREET NAME: TRAIL RIDGE DR.: WASHINGTON AVE TO LIMIT (CEMENT SUB)				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	A	Mobilization	LS	1
2	A	Construction Zone Traffic Control	LS	1
3	A	Erosion Control	LS	1
4	A	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	A	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	A	Unclassified Excavation (Alley)	SY	
7	A	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	A	Structural Excavation and Backfill (Alley)	CY	
9	A	Imported Borrow	TON	
10	A	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	A	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	A	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	1283
13	A	Cold Milling Asphalt Pavement (1.5")	SY	
14	A	Cold Milling Asphalt Pavement (2")	SY	
15	A	Cold Mill Patch Grade SX (1.5")	SY	33
16	A	Cold Mill Patch Grade SX (2")	SY	
17	A	Crack Sealant	LBS	
18	A	Slurry Seal	SY	
19	A	Hot Asphalt Patch Grade SX (4")	SY	
20	A	Hot Asphalt Patch Grade SX (6")	SY	
21	A	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	A	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	A	Subgrade Cement Treatment	SY	
24	A	Hot Asphalt Pavement Grade SX Leveler Course	TON	130
25	A	Hot Asphalt Pavement Grade S (2.5")	SY	
26	A	Hot Asphalt Pavement Grade S (4.5")	SY	
27	A	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	2365
28	A	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	A	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	A	Skin (Surface) Patching - Grade SX	TON	
31	A	Speed Cushion	EA	
32	A	Raised Crosswalk (Speed Table)	EA	
33	A	Epoxy Pavement Markings	SF	
34	A	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	A	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	A	Remove Sign and Post	EA	
37	A	Remove and Replace Sign Post	EA	
38	A	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	A	Remove and Replace Sign (D3-1)	EA	
40	A	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	A	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	A	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	A	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: B

STREET NAME: TRAIL RIDGE DR: LIMIT (SUBGRADE CEMENT TREATMENT)				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	B	Mobilization	LS	1
2	B	Construction Zone Traffic Control	LS	1
3	B	Erosion Control	LS	1
4	B	Unclassified Excavation (Trail Ridge Dr.)	SY	2857
5	B	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	B	Unclassified Excavation (Alley)	SY	
7	B	Structural Excavation and Backfill (Street Resurfacing)	CY	50
8	B	Structural Excavation and Backfill (Alley)	CY	
9	B	Imported Borrow	TON	
10	B	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	B	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	B	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	
13	B	Cold Milling Asphalt Pavement (1.5")	SY	
14	B	Cold Milling Asphalt Pavement (2")	SY	
15	B	Cold Mill Patch Grade SX (1.5")	SY	
16	B	Cold Mill Patch Grade SX (2")	SY	
17	B	Crack Sealant	LBS	
18	B	Slurry Seal	SY	
19	B	Hot Asphalt Patch Grade SX (4")	SY	
20	B	Hot Asphalt Patch Grade SX (6")	SY	
21	B	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	B	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	B	Subgrade Cement Treatment	SY	2857
24	B	Hot Asphalt Pavement Grade SX Leveler Course	TON	
25	B	Hot Asphalt Pavement Grade S (2.5")	SY	
26	B	Hot Asphalt Pavement Grade S (4.5")	SY	2857
27	B	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	
28	B	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	2857
29	B	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	B	Skin (Surface) Patching - Grade SX	TON	
31	B	Speed Cushion	EA	
32	B	Raised Crosswalk (Speed Table)	EA	
33	B	Epoxy Pavement Markings	SF	
34	B	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	B	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	B	Remove Sign and Post	EA	
37	B	Remove and Replace Sign Post	EA	
38	B	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	B	Remove and Replace Sign (D3-1)	EA	
40	B	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	B	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	B	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	B	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: C

STREET NAME: TRAIL RIDGE DR.: LIMIT (CEMENT SUB) TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	C	Mobilization	LS	1
2	C	Construction Zone Traffic Control	LS	1
3	C	Erosion Control	LS	1
4	C	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	C	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	C	Unclassified Excavation (Alley)	SY	
7	C	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	C	Structural Excavation and Backfill (Alley)	CY	
9	C	Imported Borrow	TON	
10	C	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	C	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	1
12	C	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	2258
13	C	Cold Milling Asphalt Pavement (1.5")	SY	
14	C	Cold Milling Asphalt Pavement (2")	SY	
15	C	Cold Mill Patch Grade SX (1.5")	SY	
16	C	Cold Mill Patch Grade SX (2")	SY	
17	C	Crack Sealant	LBS	
18	C	Slurry Seal	SY	
19	C	Hot Asphalt Patch Grade SX (4")	SY	
20	C	Hot Asphalt Patch Grade SX (6")	SY	19
21	C	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	C	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	C	Subgrade Cement Treatment	SY	
24	C	Hot Asphalt Pavement Grade SX Leveler Course	TON	263
25	C	Hot Asphalt Pavement Grade S (2.5")	SY	
26	C	Hot Asphalt Pavement Grade S (4.5")	SY	
27	C	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	4785
28	C	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	C	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	C	Skin (Surface) Patching - Grade SX	TON	
31	C	Speed Cushion	EA	
32	C	Raised Crosswalk (Speed Table)	EA	
33	C	Epoxy Pavement Markings	SF	
34	C	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	C	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	C	Remove Sign and Post	EA	
37	C	Remove and Replace Sign Post	EA	
38	C	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	C	Remove and Replace Sign (D3-1)	EA	
40	C	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	C	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	C	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	C	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: D

STREET NAME: ESTES WAY: TRAIL RIDGE DR. TO WASHINGTON AVE				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	D	Mobilization	LS	1
2	D	Construction Zone Traffic Control	LS	1
3	D	Erosion Control	LS	1
4	D	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	D	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	D	Unclassified Excavation (Alley)	SY	
7	D	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	D	Structural Excavation and Backfill (Alley)	CY	
9	D	Imported Borrow	TON	
10	D	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	D	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	D	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	689
13	D	Cold Milling Asphalt Pavement (1.5")	SY	
14	D	Cold Milling Asphalt Pavement (2")	SY	
15	D	Cold Mill Patch Grade SX (1.5")	SY	
16	D	Cold Mill Patch Grade SX (2")	SY	
17	D	Crack Sealant	LBS	
18	D	Slurry Seal	SY	
19	D	Hot Asphalt Patch Grade SX (4")	SY	
20	D	Hot Asphalt Patch Grade SX (6")	SY	
21	D	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	D	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	D	Subgrade Cement Treatment	SY	
24	D	Hot Asphalt Pavement Grade SX Leveler Course	TON	66
25	D	Hot Asphalt Pavement Grade S (2.5")	SY	
26	D	Hot Asphalt Pavement Grade S (4.5")	SY	
27	D	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1201
28	D	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	D	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	D	Skin (Surface) Patching - Grade SX	TON	
31	D	Speed Cushion	EA	
32	D	Raised Crosswalk (Speed Table)	EA	
33	D	Epoxy Pavement Markings	SF	
34	D	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	D	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	D	Remove Sign and Post	EA	
37	D	Remove and Replace Sign Post	EA	
38	D	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	D	Remove and Replace Sign (D3-1)	EA	
40	D	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	D	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	D	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	D	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: E

STREET NAME: ROCK ROSE CT: TRAIL RIDGE DR TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	E	Mobilization	LS	1
2	E	Construction Zone Traffic Control	LS	1
3	E	Erosion Control	LS	1
4	E	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	E	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	E	Unclassified Excavation (Alley)	SY	
7	E	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	E	Structural Excavation and Backfill (Alley)	CY	
9	E	Imported Borrow	TON	
10	E	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	E	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	E	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	370
13	E	Cold Milling Asphalt Pavement (1.5")	SY	
14	E	Cold Milling Asphalt Pavement (2")	SY	
15	E	Cold Mill Patch Grade SX (1.5")	SY	
16	E	Cold Mill Patch Grade SX (2")	SY	
17	E	Crack Sealant	LBS	
18	E	Slurry Seal	SY	
19	E	Hot Asphalt Patch Grade SX (4")	SY	
20	E	Hot Asphalt Patch Grade SX (6")	SY	
21	E	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	E	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	E	Subgrade Cement Treatment	SY	
24	E	Hot Asphalt Pavement Grade SX Leveler Course	TON	50
25	E	Hot Asphalt Pavement Grade S (2.5")	SY	
26	E	Hot Asphalt Pavement Grade S (4.5")	SY	
27	E	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	916
28	E	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	E	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	E	Skin (Surface) Patching - Grade SX	TON	
31	E	Speed Cushion	EA	
32	E	Raised Crosswalk (Speed Table)	EA	
33	E	Epoxy Pavement Markings	SF	
34	E	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	E	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	E	Remove Sign and Post	EA	
37	E	Remove and Replace Sign Post	EA	
38	E	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	E	Remove and Replace Sign (D3-1)	EA	
40	E	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	E	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	E	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	E	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: F

STREET NAME: DOGWOOD CIR: W CENTENNIAL DR TO W CENTENNIAL DR				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	F	Mobilization	LS	1
2	F	Construction Zone Traffic Control	LS	1
3	F	Erosion Control	LS	1
4	F	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	F	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	F	Unclassified Excavation (Alley)	SY	
7	F	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	F	Structural Excavation and Backfill (Alley)	CY	
9	F	Imported Borrow	TON	
10	F	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	F	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	F	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	3271
13	F	Cold Milling Asphalt Pavement (1.5")	SY	
14	F	Cold Milling Asphalt Pavement (2")	SY	
15	F	Cold Mill Patch Grade SX (1.5")	SY	
16	F	Cold Mill Patch Grade SX (2")	SY	
17	F	Crack Sealant	LBS	
18	F	Slurry Seal	SY	
19	F	Hot Asphalt Patch Grade SX (4")	SY	
20	F	Hot Asphalt Patch Grade SX (6")	SY	
21	F	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	F	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	F	Subgrade Cement Treatment	SY	
24	F	Hot Asphalt Pavement Grade SX Leveler Course	TON	341
25	F	Hot Asphalt Pavement Grade S (2.5")	SY	
26	F	Hot Asphalt Pavement Grade S (4.5")	SY	
27	F	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	6193
28	F	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	F	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	F	Skin (Surface) Patching - Grade SX	TON	
31	F	Speed Cushion	EA	
32	F	Raised Crosswalk (Speed Table)	EA	
33	F	Epoxy Pavement Markings	SF	
34	F	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	F	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	F	Remove Sign and Post	EA	
37	F	Remove and Replace Sign Post	EA	1
38	F	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	1
39	F	Remove and Replace Sign (D3-1)	EA	
40	F	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	F	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	F	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	F	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: G

STREET NAME: BOBOLINK CT: DOGWOOD CIR TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	G	Mobilization	LS	1
2	G	Construction Zone Traffic Control	LS	1
3	G	Erosion Control	LS	1
4	G	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	G	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	G	Unclassified Excavation (Alley)	SY	
7	G	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	G	Structural Excavation and Backfill (Alley)	CY	
9	G	Imported Borrow	TON	
10	G	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	G	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	G	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	321
13	G	Cold Milling Asphalt Pavement (1.5")	SY	
14	G	Cold Milling Asphalt Pavement (2")	SY	
15	G	Cold Mill Patch Grade SX (1.5")	SY	
16	G	Cold Mill Patch Grade SX (2")	SY	
17	G	Crack Sealant	LBS	
18	G	Slurry Seal	SY	
19	G	Hot Asphalt Patch Grade SX (4")	SY	
20	G	Hot Asphalt Patch Grade SX (6")	SY	
21	G	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	G	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	G	Subgrade Cement Treatment	SY	
24	G	Hot Asphalt Pavement Grade SX Leveler Course	TON	41
25	G	Hot Asphalt Pavement Grade S (2.5")	SY	
26	G	Hot Asphalt Pavement Grade S (4.5")	SY	
27	G	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	742
28	G	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	G	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	G	Skin (Surface) Patching - Grade SX	TON	
31	G	Speed Cushion	EA	
32	G	Raised Crosswalk (Speed Table)	EA	
33	G	Epoxy Pavement Markings	SF	
34	G	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	G	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	G	Remove Sign and Post	EA	
37	G	Remove and Replace Sign Post	EA	
38	G	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	G	Remove and Replace Sign (D3-1)	EA	
40	G	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	G	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	G	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	G	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: H

STREET NAME: CLIFFROSE LN: DOGWOOD CIR TO DOGWOOD CIR				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	H	Mobilization	LS	1
2	H	Construction Zone Traffic Control	LS	1
3	H	Erosion Control	LS	1
4	H	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	H	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	H	Unclassified Excavation (Alley)	SY	
7	H	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	H	Structural Excavation and Backfill (Alley)	CY	
9	H	Imported Borrow	TON	
10	H	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	H	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	H	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	1530
13	H	Cold Milling Asphalt Pavement (1.5")	SY	
14	H	Cold Milling Asphalt Pavement (2")	SY	
15	H	Cold Mill Patch Grade SX (1.5")	SY	
16	H	Cold Mill Patch Grade SX (2")	SY	
17	H	Crack Sealant	LBS	
18	H	Slurry Seal	SY	
19	H	Hot Asphalt Patch Grade SX (4")	SY	
20	H	Hot Asphalt Patch Grade SX (6")	SY	
21	H	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	H	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	H	Subgrade Cement Treatment	SY	
24	H	Hot Asphalt Pavement Grade SX Leveler Course	TON	180
25	H	Hot Asphalt Pavement Grade S (2.5")	SY	
26	H	Hot Asphalt Pavement Grade S (4.5")	SY	
27	H	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	3276
28	H	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	H	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	H	Skin (Surface) Patching - Grade SX	TON	
31	H	Speed Cushion	EA	
32	H	Raised Crosswalk (Speed Table)	EA	
33	H	Epoxy Pavement Markings	SF	
34	H	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	H	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	H	Remove Sign and Post	EA	
37	H	Remove and Replace Sign Post	EA	
38	H	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	H	Remove and Replace Sign (D3-1)	EA	
40	H	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	H	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	H	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	H	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: I

STREET NAME: MEADOW CT: GROVE CT TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	I	Mobilization	LS	1
2	I	Construction Zone Traffic Control	LS	1
3	I	Erosion Control	LS	1
4	I	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	I	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	I	Unclassified Excavation (Alley)	SY	
7	I	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	I	Structural Excavation and Backfill (Alley)	CY	
9	I	Imported Borrow	TON	
10	I	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	I	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	I	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	998
13	I	Cold Milling Asphalt Pavement (1.5")	SY	
14	I	Cold Milling Asphalt Pavement (2")	SY	
15	I	Cold Mill Patch Grade SX (1.5")	SY	
16	I	Cold Mill Patch Grade SX (2")	SY	
17	I	Crack Sealant	LBS	
18	I	Slurry Seal	SY	
19	I	Hot Asphalt Patch Grade SX (4")	SY	
20	I	Hot Asphalt Patch Grade SX (6")	SY	
21	I	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	65
22	I	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	I	Subgrade Cement Treatment	SY	
24	I	Hot Asphalt Pavement Grade SX Leveler Course	TON	106
25	I	Hot Asphalt Pavement Grade S (2.5")	SY	
26	I	Hot Asphalt Pavement Grade S (4.5")	SY	
27	I	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1928
28	I	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	I	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	I	Skin (Surface) Patching - Grade SX	TON	
31	I	Speed Cushion	EA	
32	I	Raised Crosswalk (Speed Table)	EA	
33	I	Epoxy Pavement Markings	SF	
34	I	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	I	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	I	Remove Sign and Post	EA	
37	I	Remove and Replace Sign Post	EA	
38	I	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	I	Remove and Replace Sign (D3-1)	EA	
40	I	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	I	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	I	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	I	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: J

STREET NAME: GROVE CT: WASHINGTON AVE TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	J	Mobilization	LS	1
2	J	Construction Zone Traffic Control	LS	1
3	J	Erosion Control	LS	1
4	J	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	J	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	J	Unclassified Excavation (Alley)	SY	
7	J	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	J	Structural Excavation and Backfill (Alley)	CY	
9	J	Imported Borrow	TON	
10	J	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	J	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	J	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	1040
13	J	Cold Milling Asphalt Pavement (1.5")	SY	52
14	J	Cold Milling Asphalt Pavement (2")	SY	
15	J	Cold Mill Patch Grade SX (1.5")	SY	
16	J	Cold Mill Patch Grade SX (2")	SY	
17	J	Crack Sealant	LBS	
18	J	Slurry Seal	SY	
19	J	Hot Asphalt Patch Grade SX (4")	SY	
20	J	Hot Asphalt Patch Grade SX (6")	SY	
21	J	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	67
22	J	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	J	Subgrade Cement Treatment	SY	
24	J	Hot Asphalt Pavement Grade SX Leveler Course	TON	113
25	J	Hot Asphalt Pavement Grade S (2.5")	SY	
26	J	Hot Asphalt Pavement Grade S (4.5")	SY	
27	J	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	2053
28	J	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	J	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	J	Skin (Surface) Patching - Grade SX	TON	
31	J	Speed Cushion	EA	
32	J	Raised Crosswalk (Speed Table)	EA	
33	J	Epoxy Pavement Markings	SF	
34	J	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	J	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	J	Remove Sign and Post	EA	
37	J	Remove and Replace Sign Post	EA	
38	J	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	J	Remove and Replace Sign (D3-1)	EA	
40	J	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	J	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	J	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	J	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: K

STREET NAME: HARPER LAKE DR.: GROVE CT TO KENNEDY AVE				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	K	Mobilization	LS	1
2	K	Construction Zone Traffic Control	LS	1
3	K	Erosion Control	LS	1
4	K	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	K	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	K	Unclassified Excavation (Alley)	SY	
7	K	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	K	Structural Excavation and Backfill (Alley)	CY	
9	K	Imported Borrow	TON	
10	K	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	K	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	K	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	2178
13	K	Cold Milling Asphalt Pavement (1.5")	SY	
14	K	Cold Milling Asphalt Pavement (2")	SY	
15	K	Cold Mill Patch Grade SX (1.5")	SY	
16	K	Cold Mill Patch Grade SX (2")	SY	
17	K	Crack Sealant	LBS	
18	K	Slurry Seal	SY	
19	K	Hot Asphalt Patch Grade SX (4")	SY	
20	K	Hot Asphalt Patch Grade SX (6")	SY	23
21	K	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	14
22	K	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	K	Subgrade Cement Treatment	SY	
24	K	Hot Asphalt Pavement Grade SX Leveler Course	TON	203
25	K	Hot Asphalt Pavement Grade S (2.5")	SY	
26	K	Hot Asphalt Pavement Grade S (4.5")	SY	
27	K	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	3695
28	K	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	K	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	K	Skin (Surface) Patching - Grade SX	TON	
31	K	Speed Cushion	EA	
32	K	Raised Crosswalk (Speed Table)	EA	
33	K	Epoxy Pavement Markings	SF	
34	K	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	K	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	K	Remove Sign and Post	EA	
37	K	Remove and Replace Sign Post	EA	
38	K	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	K	Remove and Replace Sign (D3-1)	EA	
40	K	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	K	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	K	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	K	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: L

STREET NAME: HARPER LAKE CT: KENNEDY AVE TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	L	Mobilization	LS	1
2	L	Construction Zone Traffic Control	LS	1
3	L	Erosion Control	LS	1
4	L	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	L	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	L	Unclassified Excavation (Alley)	SY	
7	L	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	L	Structural Excavation and Backfill (Alley)	CY	
9	L	Imported Borrow	TON	
10	L	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	L	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	L	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	377
13	L	Cold Milling Asphalt Pavement (1.5")	SY	
14	L	Cold Milling Asphalt Pavement (2")	SY	
15	L	Cold Mill Patch Grade SX (1.5")	SY	
16	L	Cold Mill Patch Grade SX (2")	SY	
17	L	Crack Sealant	LBS	
18	L	Slurry Seal	SY	
19	L	Hot Asphalt Patch Grade SX (4")	SY	
20	L	Hot Asphalt Patch Grade SX (6")	SY	5
21	L	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	31
22	L	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	L	Subgrade Cement Treatment	SY	
24	L	Hot Asphalt Pavement Grade SX Leveler Course	TON	47
25	L	Hot Asphalt Pavement Grade S (2.5")	SY	
26	L	Hot Asphalt Pavement Grade S (4.5")	SY	
27	L	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	856
28	L	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	L	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	L	Skin (Surface) Patching - Grade SX	TON	
31	L	Speed Cushion	EA	
32	L	Raised Crosswalk (Speed Table)	EA	
33	L	Epoxy Pavement Markings	SF	
34	L	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	L	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	L	Remove Sign and Post	EA	
37	L	Remove and Replace Sign Post	EA	
38	L	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	L	Remove and Replace Sign (D3-1)	EA	
40	L	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	L	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	L	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	L	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: M

STREET NAME: PIKES PEAK LN: PIKES PEAK CT TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	M	Mobilization	LS	1
2	M	Construction Zone Traffic Control	LS	1
3	M	Erosion Control	LS	1
4	M	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	M	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	M	Unclassified Excavation (Alley)	SY	
7	M	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	M	Structural Excavation and Backfill (Alley)	CY	
9	M	Imported Borrow	TON	
10	M	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	M	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	M	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	
13	M	Cold Milling Asphalt Pavement (1.5")	SY	614
14	M	Cold Milling Asphalt Pavement (2")	SY	
15	M	Cold Mill Patch Grade SX (1.5")	SY	
16	M	Cold Mill Patch Grade SX (2")	SY	
17	M	Crack Sealant	LBS	
18	M	Slurry Seal	SY	
19	M	Hot Asphalt Patch Grade SX (4")	SY	
20	M	Hot Asphalt Patch Grade SX (6")	SY	132
21	M	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	35
22	M	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	M	Subgrade Cement Treatment	SY	
24	M	Hot Asphalt Pavement Grade SX Leveler Course	TON	69
25	M	Hot Asphalt Pavement Grade S (2.5")	SY	
26	M	Hot Asphalt Pavement Grade S (4.5")	SY	
27	M	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1259
28	M	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	M	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	M	Skin (Surface) Patching - Grade SX	TON	
31	M	Speed Cushion	EA	
32	M	Raised Crosswalk (Speed Table)	EA	
33	M	Epoxy Pavement Markings	SF	
34	M	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	M	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	M	Remove Sign and Post	EA	
37	M	Remove and Replace Sign Post	EA	
38	M	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	M	Remove and Replace Sign (D3-1)	EA	
40	M	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	M	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	M	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	M	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: N

STREET NAME: PIKES PEAK CT.: WASHINGTON AVE TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	N	Mobilization	LS	1
2	N	Construction Zone Traffic Control	LS	1
3	N	Erosion Control	LS	1
4	N	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	N	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	N	Unclassified Excavation (Alley)	SY	
7	N	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	N	Structural Excavation and Backfill (Alley)	CY	
9	N	Imported Borrow	TON	
10	N	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	N	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	N	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	694
13	N	Cold Milling Asphalt Pavement (1.5")	SY	
14	N	Cold Milling Asphalt Pavement (2")	SY	
15	N	Cold Mill Patch Grade SX (1.5")	SY	
16	N	Cold Mill Patch Grade SX (2")	SY	
17	N	Crack Sealant	LBS	
18	N	Slurry Seal	SY	
19	N	Hot Asphalt Patch Grade SX (4")	SY	
20	N	Hot Asphalt Patch Grade SX (6")	SY	
21	N	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	43
22	N	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	N	Subgrade Cement Treatment	SY	
24	N	Hot Asphalt Pavement Grade SX Leveler Course	TON	78
25	N	Hot Asphalt Pavement Grade S (2.5")	SY	
26	N	Hot Asphalt Pavement Grade S (4.5")	SY	
27	N	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1410
28	N	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	N	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	N	Skin (Surface) Patching - Grade SX	TON	
31	N	Speed Cushion	EA	
32	N	Raised Crosswalk (Speed Table)	EA	
33	N	Epoxy Pavement Markings	SF	
34	N	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	N	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	N	Remove Sign and Post	EA	
37	N	Remove and Replace Sign Post	EA	
38	N	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	N	Remove and Replace Sign (D3-1)	EA	
40	N	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	N	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	N	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	N	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: O

STREET NAME: FLAT IRONS CT.: WASHINGTON AVE TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	O	Mobilization	LS	1
2	O	Construction Zone Traffic Control	LS	1
3	O	Erosion Control	LS	1
4	O	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	O	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	O	Unclassified Excavation (Alley)	SY	
7	O	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	O	Structural Excavation and Backfill (Alley)	CY	
9	O	Imported Borrow	TON	
10	O	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	O	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	O	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	639
13	O	Cold Milling Asphalt Pavement (1.5")	SY	
14	O	Cold Milling Asphalt Pavement (2")	SY	
15	O	Cold Mill Patch Grade SX (1.5")	SY	
16	O	Cold Mill Patch Grade SX (2")	SY	
17	O	Crack Sealant	LBS	
18	O	Slurry Seal	SY	
19	O	Hot Asphalt Patch Grade SX (4")	SY	
20	O	Hot Asphalt Patch Grade SX (6")	SY	
21	O	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	40
22	O	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	O	Subgrade Cement Treatment	SY	
24	O	Hot Asphalt Pavement Grade SX Leveler Course	TON	72
25	O	Hot Asphalt Pavement Grade S (2.5")	SY	
26	O	Hot Asphalt Pavement Grade S (4.5")	SY	
27	O	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1310
28	O	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	O	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	O	Skin (Surface) Patching - Grade SX	TON	
31	O	Speed Cushion	EA	
32	O	Raised Crosswalk (Speed Table)	EA	
33	O	Epoxy Pavement Markings	SF	
34	O	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	O	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	O	Remove Sign and Post	EA	
37	O	Remove and Replace Sign Post	EA	
38	O	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	O	Remove and Replace Sign (D3-1)	EA	
40	O	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	O	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	O	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	O	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: P

STREET NAME: MOUNT EVANS CT: WASHINGTON AVE TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	P	Mobilization	LS	1
2	P	Construction Zone Traffic Control	LS	1
3	P	Erosion Control	LS	1
4	P	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	P	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	P	Unclassified Excavation (Alley)	SY	
7	P	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	P	Structural Excavation and Backfill (Alley)	CY	
9	P	Imported Borrow	TON	
10	P	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	P	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	P	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	701
13	P	Cold Milling Asphalt Pavement (1.5")	SY	
14	P	Cold Milling Asphalt Pavement (2")	SY	
15	P	Cold Mill Patch Grade SX (1.5")	SY	
16	P	Cold Mill Patch Grade SX (2")	SY	
17	P	Crack Sealant	LBS	
18	P	Slurry Seal	SY	
19	P	Hot Asphalt Patch Grade SX (4")	SY	
20	P	Hot Asphalt Patch Grade SX (6")	SY	
21	P	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	40
22	P	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	P	Subgrade Cement Treatment	SY	
24	P	Hot Asphalt Pavement Grade SX Leveler Course	TON	77
25	P	Hot Asphalt Pavement Grade S (2.5")	SY	
26	P	Hot Asphalt Pavement Grade S (4.5")	SY	
27	P	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1407
28	P	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	P	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	P	Skin (Surface) Patching - Grade SX	TON	
31	P	Speed Cushion	EA	
32	P	Raised Crosswalk (Speed Table)	EA	
33	P	Epoxy Pavement Markings	SF	
34	P	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	P	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	P	Remove Sign and Post	EA	
37	P	Remove and Replace Sign Post	EA	
38	P	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	P	Remove and Replace Sign (D3-1)	EA	
40	P	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	P	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	P	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	P	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Q

STREET NAME: VISTA LN: MULBERRY ST TO MULBERRY ST				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Q	Mobilization	LS	1
2	Q	Construction Zone Traffic Control	LS	1
3	Q	Erosion Control	LS	1
4	Q	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Q	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Q	Unclassified Excavation (Alley)	SY	
7	Q	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Q	Structural Excavation and Backfill (Alley)	CY	
9	Q	Imported Borrow	TON	
10	Q	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Q	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Q	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	1883
13	Q	Cold Milling Asphalt Pavement (1.5")	SY	412
14	Q	Cold Milling Asphalt Pavement (2")	SY	
15	Q	Cold Mill Patch Grade SX (1.5")	SY	85
16	Q	Cold Mill Patch Grade SX (2")	SY	
17	Q	Crack Sealant	LBS	
18	Q	Slurry Seal	SY	
19	Q	Hot Asphalt Patch Grade SX (4")	SY	
20	Q	Hot Asphalt Patch Grade SX (6")	SY	63
21	Q	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	35
22	Q	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Q	Subgrade Cement Treatment	SY	
24	Q	Hot Asphalt Pavement Grade SX Leveler Course	TON	234
25	Q	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Q	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Q	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	4260
28	Q	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Q	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	Q	Skin (Surface) Patching - Grade SX	TON	
31	Q	Speed Cushion	EA	
32	Q	Raised Crosswalk (Speed Table)	EA	
33	Q	Epoxy Pavement Markings	SF	
34	Q	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Q	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	90
36	Q	Remove Sign and Post	EA	
37	Q	Remove and Replace Sign Post	EA	
38	Q	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Q	Remove and Replace Sign (D3-1)	EA	
40	Q	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Q	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Q	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Q	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: R

STREET NAME: SKYVIEW CT: VISTA LN TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	R	Mobilization	LS	1
2	R	Construction Zone Traffic Control	LS	1
3	R	Erosion Control	LS	1
4	R	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	R	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	R	Unclassified Excavation (Alley)	SY	
7	R	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	R	Structural Excavation and Backfill (Alley)	CY	
9	R	Imported Borrow	TON	
10	R	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	R	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	R	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	476
13	R	Cold Milling Asphalt Pavement (1.5")	SY	
14	R	Cold Milling Asphalt Pavement (2")	SY	
15	R	Cold Mill Patch Grade SX (1.5")	SY	
16	R	Cold Mill Patch Grade SX (2")	SY	
17	R	Crack Sealant	LBS	
18	R	Slurry Seal	SY	
19	R	Hot Asphalt Patch Grade SX (4")	SY	
20	R	Hot Asphalt Patch Grade SX (6")	SY	
21	R	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	R	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	R	Subgrade Cement Treatment	SY	
24	R	Hot Asphalt Pavement Grade SX Leveler Course	TON	63
25	R	Hot Asphalt Pavement Grade S (2.5")	SY	
26	R	Hot Asphalt Pavement Grade S (4.5")	SY	
27	R	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1151
28	R	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	R	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	R	Skin (Surface) Patching - Grade SX	TON	
31	R	Speed Cushion	EA	
32	R	Raised Crosswalk (Speed Table)	EA	
33	R	Epoxy Pavement Markings	SF	
34	R	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	R	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	R	Remove Sign and Post	EA	
37	R	Remove and Replace Sign Post	EA	
38	R	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	R	Remove and Replace Sign (D3-1)	EA	
40	R	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	R	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	R	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	R	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: S

STREET NAME: CRESTVIEW CT: VISTA LN TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	S	Mobilization	LS	1
2	S	Construction Zone Traffic Control	LS	1
3	S	Erosion Control	LS	1
4	S	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	S	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	S	Unclassified Excavation (Alley)	SY	
7	S	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	S	Structural Excavation and Backfill (Alley)	CY	
9	S	Imported Borrow	TON	
10	S	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	S	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	S	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	416
13	S	Cold Milling Asphalt Pavement (1.5")	SY	
14	S	Cold Milling Asphalt Pavement (2")	SY	
15	S	Cold Mill Patch Grade SX (1.5")	SY	76
16	S	Cold Mill Patch Grade SX (2")	SY	
17	S	Crack Sealant	LBS	
18	S	Slurry Seal	SY	
19	S	Hot Asphalt Patch Grade SX (4")	SY	
20	S	Hot Asphalt Patch Grade SX (6")	SY	
21	S	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	S	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	S	Subgrade Cement Treatment	SY	
24	S	Hot Asphalt Pavement Grade SX Leveler Course	TON	57
25	S	Hot Asphalt Pavement Grade S (2.5")	SY	
26	S	Hot Asphalt Pavement Grade S (4.5")	SY	
27	S	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1031
28	S	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	S	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	S	Skin (Surface) Patching - Grade SX	TON	
31	S	Speed Cushion	EA	
32	S	Raised Crosswalk (Speed Table)	EA	
33	S	Epoxy Pavement Markings	SF	
34	S	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	S	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	S	Remove Sign and Post	EA	
37	S	Remove and Replace Sign Post	EA	
38	S	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	S	Remove and Replace Sign (D3-1)	EA	
40	S	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	S	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	S	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	S	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: T

STREET NAME: JACKSON CIR: LAFAYETTE ST TO LAFAYETTE ST				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	T	Mobilization	LS	1
2	T	Construction Zone Traffic Control	LS	1
3	T	Erosion Control	LS	1
4	T	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	T	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	T	Unclassified Excavation (Alley)	SY	
7	T	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	T	Structural Excavation and Backfill (Alley)	CY	
9	T	Imported Borrow	TON	
10	T	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	T	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	T	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	3035
13	T	Cold Milling Asphalt Pavement (1.5")	SY	
14	T	Cold Milling Asphalt Pavement (2")	SY	
15	T	Cold Mill Patch Grade SX (1.5")	SY	
16	T	Cold Mill Patch Grade SX (2")	SY	
17	T	Crack Sealant	LBS	
18	T	Slurry Seal	SY	
19	T	Hot Asphalt Patch Grade SX (4")	SY	
20	T	Hot Asphalt Patch Grade SX (6")	SY	14
21	T	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	T	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	T	Subgrade Cement Treatment	SY	
24	T	Hot Asphalt Pavement Grade SX Leveler Course	TON	311
25	T	Hot Asphalt Pavement Grade S (2.5")	SY	
26	T	Hot Asphalt Pavement Grade S (4.5")	SY	
27	T	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	5649
28	T	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	T	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	T	Skin (Surface) Patching - Grade SX	TON	
31	T	Speed Cushion	EA	
32	T	Raised Crosswalk (Speed Table)	EA	
33	T	Epoxy Pavement Markings	SF	
34	T	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	T	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	60
36	T	Remove Sign and Post	EA	
37	T	Remove and Replace Sign Post	EA	
38	T	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	T	Remove and Replace Sign (D3-1)	EA	
40	T	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	T	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	T	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	T	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: U

STREET NAME: SOUTH PL: JACKSON CIR TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	U	Mobilization	LS	1
2	U	Construction Zone Traffic Control	LS	1
3	U	Erosion Control	LS	1
4	U	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	U	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	U	Unclassified Excavation (Alley)	SY	
7	U	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	U	Structural Excavation and Backfill (Alley)	CY	
9	U	Imported Borrow	TON	
10	U	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	U	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	U	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	655
13	U	Cold Milling Asphalt Pavement (1.5")	SY	
14	U	Cold Milling Asphalt Pavement (2")	SY	
15	U	Cold Mill Patch Grade SX (1.5")	SY	
16	U	Cold Mill Patch Grade SX (2")	SY	
17	U	Crack Sealant	LBS	
18	U	Slurry Seal	SY	
19	U	Hot Asphalt Patch Grade SX (4")	SY	
20	U	Hot Asphalt Patch Grade SX (6")	SY	27
21	U	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	U	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	U	Subgrade Cement Treatment	SY	
24	U	Hot Asphalt Pavement Grade SX Leveler Course	TON	79
25	U	Hot Asphalt Pavement Grade S (2.5")	SY	
26	U	Hot Asphalt Pavement Grade S (4.5")	SY	
27	U	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1434
28	U	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	U	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	U	Skin (Surface) Patching - Grade SX	TON	
31	U	Speed Cushion	EA	
32	U	Raised Crosswalk (Speed Table)	EA	
33	U	Epoxy Pavement Markings	SF	
34	U	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	U	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	U	Remove Sign and Post	EA	
37	U	Remove and Replace Sign Post	EA	
38	U	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	U	Remove and Replace Sign (D3-1)	EA	
40	U	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	U	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	U	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	U	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: V

STREET NAME: JOHNSON ST: ROOSEVELT AVE TO CDS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	V	Mobilization	LS	1
2	V	Construction Zone Traffic Control	LS	1
3	V	Erosion Control	LS	1
4	V	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	V	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	V	Unclassified Excavation (Alley)	SY	
7	V	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	V	Structural Excavation and Backfill (Alley)	CY	
9	V	Imported Borrow	TON	
10	V	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	V	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	V	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	1500
13	V	Cold Milling Asphalt Pavement (1.5")	SY	
14	V	Cold Milling Asphalt Pavement (2")	SY	
15	V	Cold Mill Patch Grade SX (1.5")	SY	
16	V	Cold Mill Patch Grade SX (2")	SY	
17	V	Crack Sealant	LBS	
18	V	Slurry Seal	SY	
19	V	Hot Asphalt Patch Grade SX (4")	SY	
20	V	Hot Asphalt Patch Grade SX (6")	SY	31
21	V	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	42
22	V	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	V	Subgrade Cement Treatment	SY	
24	V	Hot Asphalt Pavement Grade SX Leveler Course	TON	158
25	V	Hot Asphalt Pavement Grade S (2.5")	SY	
26	V	Hot Asphalt Pavement Grade S (4.5")	SY	
27	V	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	2865
28	V	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	V	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	V	Skin (Surface) Patching - Grade SX	TON	
31	V	Speed Cushion	EA	
32	V	Raised Crosswalk (Speed Table)	EA	
33	V	Epoxy Pavement Markings	SF	
34	V	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	V	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	V	Remove Sign and Post	EA	
37	V	Remove and Replace Sign Post	EA	
38	V	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	V	Remove and Replace Sign (D3-1)	EA	
40	V	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	V	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	V	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	V	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: W

STREET NAME: SUMMIT VIEW DR: CO42 TO LIMITS				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	W	Mobilization	LS	1
2	W	Construction Zone Traffic Control	LS	1
3	W	Erosion Control	LS	1
4	W	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	W	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	W	Unclassified Excavation (Alley)	SY	
7	W	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	W	Structural Excavation and Backfill (Alley)	CY	
9	W	Imported Borrow	TON	
10	W	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	W	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	W	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	
13	W	Cold Milling Asphalt Pavement (1.5")	SY	
14	W	Cold Milling Asphalt Pavement (2")	SY	1096
15	W	Cold Mill Patch Grade SX (1.5")	SY	
16	W	Cold Mill Patch Grade SX (2")	SY	
17	W	Crack Sealant	LBS	
18	W	Slurry Seal	SY	
19	W	Hot Asphalt Patch Grade SX (4")	SY	
20	W	Hot Asphalt Patch Grade SX (6")	SY	
21	W	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	W	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	6
23	W	Subgrade Cement Treatment	SY	
24	W	Hot Asphalt Pavement Grade SX Leveler Course	TON	60
25	W	Hot Asphalt Pavement Grade S (2.5")	SY	
26	W	Hot Asphalt Pavement Grade S (4.5")	SY	
27	W	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	1096
28	W	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	W	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	W	Skin (Surface) Patching - Grade SX	TON	
31	W	Speed Cushion	EA	
32	W	Raised Crosswalk (Speed Table)	EA	
33	W	Epoxy Pavement Markings	SF	122
34	W	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	W	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	64
36	W	Remove Sign and Post	EA	
37	W	Remove and Replace Sign Post	EA	
38	W	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	1
39	W	Remove and Replace Sign (D3-1)	EA	
40	W	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	W	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	1
42	W	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	W	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: X

STREET NAME: ALLEY NO. 29				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	X	Mobilization	LS	1
2	X	Construction Zone Traffic Control	LS	1
3	X	Erosion Control	LS	1
4	X	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	X	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	X	Unclassified Excavation (Alley)	SY	
7	X	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	X	Structural Excavation and Backfill (Alley)	CY	
9	X	Imported Borrow	TON	
10	X	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	X	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	X	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	
13	X	Cold Milling Asphalt Pavement (1.5")	SY	
14	X	Cold Milling Asphalt Pavement (2")	SY	
15	X	Cold Mill Patch Grade SX (1.5")	SY	
16	X	Cold Mill Patch Grade SX (2")	SY	
17	X	Crack Sealant	LBS	
18	X	Slurry Seal	SY	
19	X	Hot Asphalt Patch Grade SX (4")	SY	
20	X	Hot Asphalt Patch Grade SX (6")	SY	
21	X	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	X	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	X	Subgrade Cement Treatment	SY	
24	X	Hot Asphalt Pavement Grade SX Leveler Course	TON	
25	X	Hot Asphalt Pavement Grade S (2.5")	SY	
26	X	Hot Asphalt Pavement Grade S (4.5")	SY	
27	X	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	
28	X	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	X	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	X	Skin (Surface) Patching - Grade SX	TON	14
31	X	Speed Cushion	EA	
32	X	Raised Crosswalk (Speed Table)	EA	
33	X	Epoxy Pavement Markings	SF	
34	X	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	X	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	X	Remove Sign and Post	EA	
37	X	Remove and Replace Sign Post	EA	
38	X	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	X	Remove and Replace Sign (D3-1)	EA	
40	X	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	X	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	X	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	X	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Y

STREET NAME: ALLEY NO. 34				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Y	Mobilization	LS	1
2	Y	Construction Zone Traffic Control	LS	1
3	Y	Erosion Control	LS	1
4	Y	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Y	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Y	Unclassified Excavation (Alley)	SY	473
7	Y	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Y	Structural Excavation and Backfill (Alley)	CY	26
9	Y	Imported Borrow	TON	
10	Y	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Y	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Y	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	
13	Y	Cold Milling Asphalt Pavement (1.5")	SY	
14	Y	Cold Milling Asphalt Pavement (2")	SY	
15	Y	Cold Mill Patch Grade SX (1.5")	SY	
16	Y	Cold Mill Patch Grade SX (2")	SY	
17	Y	Crack Sealant	LBS	
18	Y	Slurry Seal	SY	
19	Y	Hot Asphalt Patch Grade SX (4")	SY	
20	Y	Hot Asphalt Patch Grade SX (6")	SY	
21	Y	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Y	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Y	Subgrade Cement Treatment	SY	
24	Y	Hot Asphalt Pavement Grade SX Leveler Course	TON	
25	Y	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Y	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Y	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	
28	Y	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Y	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	473
30	Y	Skin (Surface) Patching - Grade SX	TON	
31	Y	Speed Cushion	EA	
32	Y	Raised Crosswalk (Speed Table)	EA	
33	Y	Epoxy Pavement Markings	SF	
34	Y	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Y	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	Y	Remove Sign and Post	EA	
37	Y	Remove and Replace Sign Post	EA	
38	Y	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Y	Remove and Replace Sign (D3-1)	EA	
40	Y	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Y	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Y	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Y	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: Z

STREET NAME: ALLEY NO. 35				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	Z	Mobilization	LS	1
2	Z	Construction Zone Traffic Control	LS	1
3	Z	Erosion Control	LS	1
4	Z	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	Z	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	Z	Unclassified Excavation (Alley)	SY	419
7	Z	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	Z	Structural Excavation and Backfill (Alley)	CY	23
9	Z	Imported Borrow	TON	
10	Z	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	Z	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	Z	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	
13	Z	Cold Milling Asphalt Pavement (1.5")	SY	
14	Z	Cold Milling Asphalt Pavement (2")	SY	
15	Z	Cold Mill Patch Grade SX (1.5")	SY	
16	Z	Cold Mill Patch Grade SX (2")	SY	
17	Z	Crack Sealant	LBS	
18	Z	Slurry Seal	SY	
19	Z	Hot Asphalt Patch Grade SX (4")	SY	
20	Z	Hot Asphalt Patch Grade SX (6")	SY	
21	Z	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	Z	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	Z	Subgrade Cement Treatment	SY	
24	Z	Hot Asphalt Pavement Grade SX Leveler Course	TON	
25	Z	Hot Asphalt Pavement Grade S (2.5")	SY	
26	Z	Hot Asphalt Pavement Grade S (4.5")	SY	
27	Z	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	
28	Z	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	Z	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	419
30	Z	Skin (Surface) Patching - Grade SX	TON	
31	Z	Speed Cushion	EA	
32	Z	Raised Crosswalk (Speed Table)	EA	
33	Z	Epoxy Pavement Markings	SF	
34	Z	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	Z	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	Z	Remove Sign and Post	EA	
37	Z	Remove and Replace Sign Post	EA	
38	Z	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	Z	Remove and Replace Sign (D3-1)	EA	
40	Z	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	Z	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	Z	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	Z	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: AA

STREET NAME: ALLEY NO. 38				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	AA	Mobilization	LS	1
2	AA	Construction Zone Traffic Control	LS	1
3	AA	Erosion Control	LS	1
4	AA	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	AA	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	AA	Unclassified Excavation (Alley)	SY	417
7	AA	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	AA	Structural Excavation and Backfill (Alley)	CY	23
9	AA	Imported Borrow	TON	
10	AA	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	AA	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	AA	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	
13	AA	Cold Milling Asphalt Pavement (1.5")	SY	
14	AA	Cold Milling Asphalt Pavement (2")	SY	
15	AA	Cold Mill Patch Grade SX (1.5")	SY	
16	AA	Cold Mill Patch Grade SX (2")	SY	
17	AA	Crack Sealant	LBS	
18	AA	Slurry Seal	SY	
19	AA	Hot Asphalt Patch Grade SX (4")	SY	
20	AA	Hot Asphalt Patch Grade SX (6")	SY	
21	AA	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	AA	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	AA	Subgrade Cement Treatment	SY	
24	AA	Hot Asphalt Pavement Grade SX Leveler Course	TON	
25	AA	Hot Asphalt Pavement Grade S (2.5")	SY	
26	AA	Hot Asphalt Pavement Grade S (4.5")	SY	
27	AA	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	
28	AA	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	AA	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	417
30	AA	Skin (Surface) Patching - Grade SX	TON	
31	AA	Speed Cushion	EA	
32	AA	Raised Crosswalk (Speed Table)	EA	
33	AA	Epoxy Pavement Markings	SF	
34	AA	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	AA	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	AA	Remove Sign and Post	EA	
37	AA	Remove and Replace Sign Post	EA	
38	AA	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	AA	Remove and Replace Sign (D3-1)	EA	
40	AA	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	AA	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	AA	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	AA	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
PROJECT: 2025 STREET RESURFACING PROJECT
PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: BB

STREET NAME: MISCELLANEOUS (PATCHING)				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	BB	Mobilization	LS	1
2	BB	Construction Zone Traffic Control	LS	1
3	BB	Erosion Control	LS	1
4	BB	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	BB	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	BB	Unclassified Excavation (Alley)	SY	
7	BB	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	BB	Structural Excavation and Backfill (Alley)	CY	
9	BB	Imported Borrow	TON	
10	BB	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	BB	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	BB	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	
13	BB	Cold Milling Asphalt Pavement (1.5")	SY	
14	BB	Cold Milling Asphalt Pavement (2")	SY	
15	BB	Cold Mill Patch Grade SX (1.5")	SY	
16	BB	Cold Mill Patch Grade SX (2")	SY	379
17	BB	Crack Sealant	LBS	
18	BB	Slurry Seal	SY	
19	BB	Hot Asphalt Patch Grade SX (4")	SY	
20	BB	Hot Asphalt Patch Grade SX (6")	SY	
21	BB	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	BB	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	BB	Subgrade Cement Treatment	SY	
24	BB	Hot Asphalt Pavement Grade SX Leveler Course	TON	
25	BB	Hot Asphalt Pavement Grade S (2.5")	SY	
26	BB	Hot Asphalt Pavement Grade S (4.5")	SY	
27	BB	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	
28	BB	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	BB	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	BB	Skin (Surface) Patching - Grade SX	TON	
31	BB	Speed Cushion	EA	1
32	BB	Raised Crosswalk (Speed Table)	EA	2
33	BB	Epoxy Pavement Markings	SF	
34	BB	Thermoplastic Pavement Markings (Words and Symbols)	SF	188
35	BB	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	240
36	BB	Remove Sign and Post	EA	
37	BB	Remove and Replace Sign Post	EA	
38	BB	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	BB	Remove and Replace Sign (D3-1)	EA	
40	BB	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	2
41	BB	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	BB	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	4
43	BB	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

CITY OF LOUISVILLE
 PROJECT: 2025 STREET RESURFACING PROJECT
 PROJECT NO: 301312-660012

QUANTITY TABULATION

Sub-item: CC

STREET NAME: MISCELLANEOUS - ENCLAVE CIR AND W PINE CT				
ITEM #		DESCRIPTION	UNIT	QUANTITY
1	CC	Mobilization	LS	1
2	CC	Construction Zone Traffic Control	LS	1
3	CC	Erosion Control	LS	1
4	CC	Unclassified Excavation (Trail Ridge Dr.)	SY	
5	CC	Unclassified Excavation (Enclave Cir., Enclave Way, and Pine Ct.)	SY	
6	CC	Unclassified Excavation (Alley)	SY	
7	CC	Structural Excavation and Backfill (Street Resurfacing)	CY	
8	CC	Structural Excavation and Backfill (Alley)	CY	
9	CC	Imported Borrow	TON	
10	CC	Remove Existing 6" MH Ring and Cover and Install New 6" Manhole Ring and Cover (30") Storm	EA	
11	CC	Remove Existing 6" MH Ring and Cover and Install New 4" Manhole Ring and Cover (24") Sewer	EA	
12	CC	Edge Cold Milling Asphalt Pavement (0"-1.5")	SY	
13	CC	Cold Milling Asphalt Pavement (1.5")	SY	
14	CC	Cold Milling Asphalt Pavement (2")	SY	
15	CC	Cold Mill Patch Grade SX (1.5")	SY	
16	CC	Cold Mill Patch Grade SX (2")	SY	
17	CC	Crack Sealant	LBS	
18	CC	Slurry Seal	SY	
19	CC	Hot Asphalt Patch Grade SX (4")	SY	712
20	CC	Hot Asphalt Patch Grade SX (6")	SY	
21	CC	18" W x 3" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
22	CC	18" W x 4" D Cold Mill Patching w/ Crack Filling and Pavement Repair Membrane	SY	
23	CC	Subgrade Cement Treatment	SY	
24	CC	Hot Asphalt Pavement Grade SX Leveler Course	TON	
25	CC	Hot Asphalt Pavement Grade S (2.5")	SY	
26	CC	Hot Asphalt Pavement Grade S (4.5")	SY	
27	CC	Virgin Hot Asphalt Pavement Grade SX (1.5" Overlay)	SY	
28	CC	Virgin Hot Asphalt Pavement Grade SX (1.5")	SY	
29	CC	Virgin Hot Asphalt Pavement Grade S (4") and 12" Class 6 Recycle Concrete	SY	
30	CC	Skin (Surface) Patching - Grade SX	TON	
31	CC	Speed Cushion	EA	
32	CC	Raised Crosswalk (Speed Table)	EA	
33	CC	Epoxy Pavement Markings	SF	
34	CC	Thermoplastic Pavement Markings (Words and Symbols)	SF	
35	CC	Thermoplastic Pavement Markings (Crosswalk and Stop Bars)	SF	
36	CC	Remove Sign and Post	EA	
37	CC	Remove and Replace Sign Post	EA	
38	CC	Remove and Replace Sign (R1-1) - Stop Sign - 30" x 30"	EA	
39	CC	Remove and Replace Sign (D3-1)	EA	
40	CC	Furnish and Install New Sign (W17-1) - Speed Hump - 30" x 30"	EA	
41	CC	Furnish and Install New Sign and Post (R1-1) - Stop Sign - 30" x 30"	EA	
42	CC	Furnish and Install New Signs and Post (Specialty and W16-7P) - Raised X-ing	EA	
43	CC	Furnish and Install New Signs and Post (S1-1 and W16-9P) - School X-ing	EA	

SECTION 01025 - MEASUREMENT AND PAYMENT

1.1 GENERAL

- A. Measurement and payment criteria applicable to (portions of) the Work performed under a unit price payment method.
- B. Defect assessment and non-payment for rejected work.

1.2 AUTHORITY

- A. Measurement methods delineated in the individual specification sections complement the criteria of this section. (In the event of conflict, the requirements of the individual specification section govern.)
- B. Take all measurements and compute quantities. ENGINEER will verify measurements and quantities.

1.3 UNIT QUANTITIES SPECIFIED

- A. Quantities indicated in the Bid Form are for bidding and contract purposes only. Quantities and measurements supplied or placed in the Work and verified by ENGINEER determine payment.
- B. If the actual Work requires more or fewer quantities than those quantities indicated, provide the required quantities at the unit/lump sum prices contracted.
- C. If the actual Work requires a change that is equal to an increase or decrease that is 25 percent (25%) or more of the Bid Price, then OWNER or CONTRACTOR may claim for a Contract Price adjustment.
- D. The City reserves the right to remove work from the Contract. If an item is removed from the contract, no payment will be made for said item.

1.3.1 LUMP SUM SCHEDULES

- A. There will be no measurement for lump sum items included in the lump sum schedule.

1.3.2 FORCE ACCOUNT – MINOR CONTRACT REVISIONS

- A. Force account items include the Project Manager's estimate for items included in the Contract. The estimated amounts marked with "AL" will be added to the total bid to determine the amount of performance and payment bonds. Force Account work shall be performed as directed and approved by the City's Project Manager. This is not a lump sum bid item, but rather an allowance for work not reasonably anticipated in the above items.
- B. Payment will be made in accordance with the General Conditions. If additional work as described above is not encountered, this item will not be used.

C. Force Account Descriptions

- i. F/A Minor Contract Revisions – This work consists of minor work and approved by the Project Manager, which is not included in the Contract drawings or specifications, and is necessary to accomplish the scope of work of this contract.

1.4 MEASUREMENT OF QUANTITIES

- A. Measurement by volume: Measured by cubic dimension using mean length, width, and height or thickness.
- B. Measurement by area: Measured by square dimension, using mean length and width or radius.
- C. Linear measurement: Measured by linear dimension, at the item centerline or mean chord.
- D. Measurement by weight: The term “ton” will mean the short ton consisting of 2000 pounds avoirdupois.

Materials measured or proportioned by weight shall be weighed on accurate scales. Scales shall be accurate within the allowable tolerances as prescribed by State law. The scales shall be sealed by the measurement Standards Section of the Colorado Department of Agriculture at least once each year, each time the scales are relocated, and as often as ENGINEER may deem necessary. Scales shall be furnished by CONTRACTOR or CONTRACTOR may utilize commercial scales.

Scales shall be operated according to the Colorado Department of Agriculture’s regulations. Weighers, scales, scale tickets, scale house, and verification of the scales’ accuracy will not be measured and paid for separately but shall be included in the work.

CONTRACTOR may use either certified hopper scales or certified platform scales.

When platform scales are used to weigh vehicles carrying material paid for by weight, each vehicle shall be weighed by a certified weigher. Hopper scales used to directly measure material paid for by weight shall be operated by certified weighers and provide an accurate net weight.

The operator of each vehicle carrying material measured and paid for by weight shall obtain a scale ticket (certificate of correct weight) from the certified weigher and deliver the ticket to ENGINEER at the point of delivery of the material.

The scale ticket shall include the following information:

- 1. Project Number
- 2. Date
- 3. Ticket Number
- 4. Haul Unit Number
- 5. Gross weight
- 6. Tare Weight

- 7. Net Weight
- 8. Material Type
- 9. Certified Weigher's Name

1.5 PAYMENT

- A. Payment includes: Full compensation for all required labor, products, tools, equipment, plant, transportation, services and incidentals; erection, application or installation of an item of the Work; overhead and profit.
- B. Final payment for Work governed by unit prices will be made on the basis of the actual measurements and quantities accepted by ENGINEER multiplied by the unit price for Work which is incorporated in or made necessary by the Work.

1.6 DEFECT ASSESSMENT

- A. Replace the Work, or portions of the Work, not conforming to specified requirements.

1.7 NON-PAYMENT FOR REJECTED PRODUCTS

- A. Payment will not be made for any of the following:
 - 1. Products wasted or disposed of in a manner that is not acceptable.
 - 2. Products determined as unacceptable before or after placement.
 - 3. Products not completely unloaded from the transporting vehicle.
 - 4. Products placed beyond the lines and levels of the required Work.
 - 5. Products remaining on hand after completion of the Work.
 - 6. Loading, hauling, and disposing of rejected Products.

2.0 PRODUCTS - Not Used

3.0 EXECUTION - Not Used

SECTION 01091 - REFERENCE STANDARDS

PART 1 - SUMMARY

1.1 SUMMARY:

1.1.1 WORK INCLUDED:

- A. This Section contains a summary of industry-accepted and recognized standards published by trade associations, government, and institutional organizations, which are referred to in the various sections of these specifications or elsewhere in the Contract Documents.
- B. Standards listed herein are included in the Contract Documents by this reference, and become a part of the Contract Documents to the same extent as though included in their entirety unless specific limitations are noted in the individual Specifications Sections.
- C. Listings of reference standards include name and address of the organization publishing the standard, plus the full name and designator of each of the standards referenced herein.
- D. If a publication date or edition number is listed with the reference standard, that publication date or edition number shall apply; otherwise, the publication date of edition number in effect at the Contract Date shall apply.
- E. Inclusion of reference standards herein does not make ENGINEER an agent of the publishing agency, nor does it obligate ENGINEER to perform inspections required by or enforce rules or regulations contained in the reference standards.

1.2 REFERENCES:

1.2.1 RELATED DOCUMENTS: General Conditions, Supplementary Conditions, and applicable provisions of other Division 1 sections apply to this section.

1.2.2 PRECEDENCE OF REQUIREMENTS: In the event of a conflict between the requirements of a published reference standard and the specific requirements of the general conditions, supplementary conditions, or other Contract Documents, or between one reference standard and another reference standard, the more stringent requirements shall take precedence.

PART 2 - PRODUCTS - (Not Used)

PART 3 - EXECUTION

3.1.1 AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)
444 North Capital Street NW, Suite 225, Washington, DC 2002

- M103 -- Mild to medium strength carbon-steel castings for general application
- M105 -- Gray iron castings

- M111 -- Zinc (Hot-Galvanized) coatings on products fabricated from rolled, pressed, and forged steel shapes, plates, bar, and strip
- M183 -- Structural steel
- T166 -- Bulk specific gravity of compacted bituminous mixtures

3.1.2 AMERICAN CONCRETE INSTITUTE (ACI)

P.O. Box 19150, Redford Station, Detroit, MI 48219
(313) 372-9800

- ACI 211.1 -- Standard practice for selecting proportions for normal, heavyweight, and mass concrete
- ACI 211.2 -- Standard practice for selecting proportions for structural lightweight concrete
- ACI 301 -- Specifications for structural concrete for buildings
- ACI 304 -- Recommended practice for measuring, mixing, transporting, and placing concrete
- ACI 304.2R -- Placing concrete by pumping methods
- ACI 305R -- Hot weather concreting
- ACI 306R -- Cold weather concreting
- ACI 315 -- Details and detailing of concrete reinforcement
- ACI 318 -- Building codes requirements for reinforced concrete
Note: Reference to ACI 318 may be limited by more stringent requirements of local building code
- ACI 347 -- Recommended practice for concrete formwork
- ACI SP-66 -- ACI detailing manual (synopsis)

3.1.3 AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

1916 Race Street, Philadelphia, PA 19103
(215) 299-5585

- ASTM A27 -- Specification for steel castings, carbon, for general application
- ASTM A36 -- Standard specification for structural steel
- ASTM A48 -- Specification for gray iron castings
- ASTM A53 -- Specification for pipe, steel, black and hot-dipped, zinc-coated, welded and seamless
- ASTM A82 -- Specifications for steel wire, plain, for concrete reinforcement.
- ASTM A120 -- Specification for pipe, steel, black and hot-dipped zinc-coated (galvanized) welded and seamless, for ordinary uses
- ASTM A123 -- Specification for zinc (hot dipped-galvanized) coatings on iron and steel products
- ASTM A185 -- Specifications for steel welded wire, fabric, plain, for concrete reinforcement
- ASTM A283 -- Specification for low and intermediate tensile strength carbon steel plates, shapes, and bars
- ASTM A307 -- Specification for carbon steel externally threaded standard fasteners
- ASTM A325 -- Specification for high-strength bolts for structural steel joints
- ASTM A366 -- Specification for steel, carbon, cold-rolled sheet, commercial quality
- ASTM A416 -- Specification for uncoated seven-wire stress-relieved steel strand for pre-stressed concrete
- ASTM A421 -- Specification for uncoated stress-relieved wire for pre-stressed concrete
- ASTM A446 -- Specification for steel sheet, zinc-coated (galvanized) by the hot-dip process, structural (physical) quality

ASTM A490	--	Specification for heat-treated, steel structural bolts, 150 ksi (1035 map) tensile strength
ASTM A500	--	Specification for cold-formed welded and seamless carbon steel structural tubing in rounds and shapes
ASTM A501	--	Specification for hot-formed welded and seamless carbon steel structural tubing
ASTM A525	--	Specification for general requirements for steel sheet, zinc-coated (galvanized) by the hot-dip process
ASTM A526	--	Specification for sheet steel, zinc-coated (galvanized) by the hot-dip process, commercial quality
ASTM A536	--	Specification for ductile iron castings
ASTM A568	--	Specification for general requirements for steel, carbon, and high-strength, low-alloy hot-rolled sheet and cold-rolled sheet
ASTM A570	--	Specification for hot-rolled carbon steel sheet and strip, structural quality
ASTM A572	--	Specification for high-strength low-alloy columbium-vanadium steels of structural quality
ASTM A588	--	Specification for high-strength low-alloy structural steel with 50 ksi (345MPa) minimum yield point to 4 inches thick
ASTM A611	--	Specification for steel, cold-rolled sheet, carbon, structural
ASTM A615	--	Specification for deformed and plain billet-steel bars for concrete reinforcement
ASTM A663	--	Specification for steel bars, carbon, merchant quality, mechanical properties
ASTM A775	--	Specification for epoxy-coated reinforcing steel bars
ASTM B32	--	Specification for solder metal
ASTM B88	--	Specification for seamless copper water tube
ASTM B209	--	Specification for aluminum and aluminum-alloy sheet and plate
ASTM B221	--	Specification for aluminum-alloy extruded bars, rods, wire, shapes, and tubes
ASTM C31	--	Methods of making and curing concrete test specimens in the field
ASTM C33	--	Specification for concrete aggregates
ASTM C36	--	Specification for gypsum wall board
ASTM C39	--	Test method for compressive strength of cylindrical concrete specimens
ASTM C42	--	Method of obtaining and testing drilled cores and sawed beams of concrete
ASTM C67	--	Method of testing brick and structural clay tile
ASTM C76	--	Specification for reinforced concrete culvert, storm drain, and sewer pipe
ASTM C79	--	Test method for gypsum sheathing board
ASTM C94	--	Specification for ready mixed concrete
ASTM C109	--	Test method for compressive strength of hydraulic cement mortars (using 2-inch or 50 mm cube specimens)
ASTM C110	--	Methods for physical testing of quicklime, hydrated lime, and limestone
ASTM C136	--	Method for sieve analysis of fine and coarse aggregates
ASTM C138	--	Test method for unit weight, yield, and air content (gravimetric) of concrete
ASTM C140	--	Method of sampling and testing concrete masonry units
ASTM C143	--	Test method for slump or Portland cement concrete
ASTM C144	--	Specification for aggregate for masonry mortar
ASTM C150	--	Specification for Portland cement
ASTM C171	--	Specification for sheet materials for curing concrete
ASTM C172	--	Method of sampling fresh concrete
ASTM C173	--	Test method for air content of freshly mixed concrete by the volumetric method
ASTM C207	--	Specification for hydrated lime for masonry purposes

ASTM C231	--	Test method for a content of freshly mixed concrete by the pressure method
ASTM C260	--	Specification for air entraining admixtures for concrete
ASTM C270	--	Specification for mortar for unit masonry
ASTM C309	--	Specification for liquid membrane-forming compounds for curing concrete
ASTM C330	--	Specification for lightweight aggregated for structural concrete
ASTM C425	--	Specification for compression joints for vitrified clay pipe and fittings
ASTM C476	--	Specification for grout for masonry
ASTM C478	--	Specification for precast reinforced concrete manhole sections
ASTM C494	--	Specification for chemical admixtures for concrete
ASTM C506	--	Specification for reinforced concrete arch culvert, storm drain, and sewer pipe
ASTM C507	--	Specification for reinforced concrete elliptical culvert, storm drain, or sewer pipe
ASTM C578	--	Specification for performed, cellular polystyrene thermal insulation
ASTM C612	--	Specification for mineral fiber block and board thermal insulation
ASTM C630	--	Specification of water-resistant gypsum backing board
ASTM C641	--	Test method for staining materials in lightweight concrete aggregates
ASTM C645	--	Specification for non-load (axial) bearing steel studs, runners (track), and furring channels for screw application of gypsum board
ASTM C665	--	Specification for mineral fiber blanket thermal insulation for light frame construction and manufactured housing
ASTM C672	--	Test method for scaling resistance of concrete surfaces exposed to deicing chemicals
ASTM C700	--	Specification for vitrified clay pipe, extra strength, standard strength, and perforated
ASTM C726	--	Specification for mineral fiber and mineral fiber, rigid cellular, polyurethane composite roof insulation board
ASTM C803	--	Test method for penetration resistance of hardened concrete
ASTM C805	--	Test method for rebound number of hardened concrete
ASTM C828	--	Recommended practice for low-pressure air test of vitrified clay pipe lines
ASTM C834	--	Specification for latex sealing compounds
ASTM C920	--	Specification for elastomeric joint sealants
ASTM C936	--	Specification for solid concrete interlocking paving units
ASTM D41	--	Specification for asphalt primer used in roofing and waterproofing
ASTM D312	--	Specification for asphalt used in roofing
ASTM D422	--	Test method for particle size analysis of soils
ASTM D448	--	Specification for standard sizes of coarse aggregate for highway construction
ASTM D698	--	Test method for moisture density relations of soils and soil-aggregate mixtures using 5.5-lb rammer and 12-inch drop
ASTM D1188	--	Test method for bulk specific gravity and density of compacted bituminous mixtures using paraffin-coated specimens
ASTM D1227	--	Specification for emulsified asphalt used as a protective coating for built-up roofing
ASTM D1556	--	Test method for density of soil in place by the sand-cone method
ASTM D1557	--	Method for moisture density relations of soils and soil-aggregate mixtures using 10-lb rammer and 18-inch drop
ASTM D1559	--	Test method for resistance to plastic flow of bituminous mixtures using marshal apparatus
ASTM D1667	--	Specification for flexible cellular materials - vinyl chloride polymers and copolymers (closed-cell vinyl)

ASTM D1751	--	Specification for preformed expansion joint fillers for concrete paving and structural construction (non-extruding and resilient bituminous types)
ASTM D1752	--	Specification for preformed sponge rubber and cork expansion joint fillers for concrete paving and structural construction
ASTM D1784	--	Specification for rigid poly (vinyl chloride) (PVC) compounds and chlorinated poly (vinyl chloride) (CPVC) compounds
ASTM D1785	--	Specification for poly (vinyl chloride) (PVC) pipe, schedules 40, 80, and 120
ASTM D2000	--	Classification for rubber products in automotive applications
ASTM D2167	--	Test method for density of soil in place by the rubber-balloon method
ASTM D2172	--	Test method for quantitative extraction of bitumen from bituminous paving mixtures
ASTM D2178	--	Specification for asphalt glass (felt) used in roofing and waterproofing
ASTM D2216	--	Method for laboratory determination of water (moisture) content of soil, rock, and soil-aggregate mixtures
ASTM D2241	--	Specification for poly (vinyl chloride) (PVC) plastic pipe (SDR-PR)
ASTM D2287	--	Specification for nonrigid vinyl chloride polymer and copolymer molding and extrusion compounds
ASTM D2487	--	Test method for classification of soils for engineering purposes
ASTM D2564	--	Specification for solvent cements for poly (vinyl chloride) (PVC) plastic pipe and fittings
ASTM D2729	--	Specification for poly (vinyl chloride) (PVC) sewer pipe and fittings
ASTM D2855	--	Recommended practice for making solvent cemented joints with poly (vinyl chloride) (PVC) pipe and fittings
ASTM D2898	--	Accelerated weathering of fire-retardant-treated wood for fire testing
ASTM D2922	--	Test method for density of soil and soil-aggregate in place by nuclear method
ASTM D2950	--	Test method for density of bituminous concrete in place by nuclear method
ASTM D3017	--	Test method for moisture content of soil and soil-aggregate in place by nuclear methods (shallow depth)
ASTM D3034	--	Specification for type PSM poly (vinyl chloride) (PVC) sewer pipe and fittings
ASTM D3909	--	Specification for asphalt roll roofing (glass mat) surfaced with mineral granules
ASTM D4253	--	Test method for maximum index density of soils using a vibratory table
ASTM D4254	--	Test methods for minimum index density of soils and calculation of relative density
ASTM D4318	--	Test method for liquid limit, plastic limit, plasticity index of soils
ASTM D4397	--	Specification for polyethylene sheeting for construction, industrial, and agricultural applications
ASTM E84	--	Test method for surface burning characteristics of building materials
ASTM E96	--	Test methods for water vapor transmission of materials
ASTM E136	--	Test method for behavior of materials in a vertical tube furnace at 750°C
ASTM E283	--	Test method for rate of air leakage through exterior windows, curtain walls, and doors
ASTM E329	--	Recommended practice for inspection and testing agencies for concrete, steel, and bituminous materials as used in construction
ASTM E331	--	Test method for water penetration of exterior windows, curtain walls, and doors by uniform static air pressure difference
ASTM E605	--	Test method for thickness and density of sprayed fire-resistive material applied to structural members
ASTM E759	--	Test method for effect of deflection of sprayed fire-resistive material applied to structural members

- ASTM E760 -- Test method for effect of impact on bonding of sprayed fire-resistive material applied to structural members
- ASTM E761 -- Test method for compressive strength of sprayed fire-resistive material applied to structural members
- ASTM E859 -- Test method for air erosion of sprayed fire-resistive material applied to structural members
- ASTM F567 -- Practice for installation of chain link fence
- ASTM F679 -- Specification for poly (vinyl chloride) (PVC) large diameter plastic gravity sewer pipe and fittings

3.1.4 AMERICAN WATER WORKS ASSOCIATION (AWWA)

6666 W. Quincy Ave., Denver, CO 80235
(303) 794-7711

Specifications and Test Methods Specifically Referenced Herein.

3.1.5 PORTLAND CEMENT ASSOCIATION (PCA)

5420 Old Orchard Road, Skokie, IL 60077
(312) 966-6200

Design and Control of Concrete Admixtures.

3.1.6 CITY OF LOUISVILLE

Department of Public Works - Engineering Division
749 Main Street, Louisville, Colorado 80027
(303) 335-4608

Design and Construction Standards, 1994 Edition

3.1.7 COLORADO DEPARTMENT OF TRANSPORTATION (CDOT)

4201 E. Arkansas Avenue, Denver, CO 80222
(303) 757-9011

Standard Specification for Road and Bridge Construction, current Edition.

- END OF SECTION -

SECTION 01300 - SUBMITTALS

PART 1 - GENERAL

1.1 SUMMARY:

1.1.1 WORK INCLUDED:

- A. This section contains a summary of submittals required by the Contract Documents and establishes the general procedures and requirements for submittals.
- B. Submittals covered under this section include, but are not necessarily limited to, schedules, reports, product data, shop drawings, samples, and miscellaneous data specifically prepared for the work by CONTRACTOR or any subcontractor, manufacturer, or supplier, to illustrate some portion of the work.

1.1.2 RELATED WORK: Specific requirements for submittals are included in the individual specification sections.

1.2 REFERENCES:

1.2.1 RELATED DOCUMENTS: General conditions, supplementary conditions, and applicable provisions of Division 1 sections apply to this section.

1.3 DEFINITIONS:

- 1.3.1 **PRODUCT DATA:** As used herein, the term "product data" includes standard printed information published by the manufacturer describing materials, products, systems, and installation instruction not specifically prepared for this project, other than designation of selections from among available choices printed.
- 1.3.2 **SHOP DRAWINGS:** As used herein, the term "shop drawings" includes specially prepared technical data forms including drawings, diagrams, performance curves, data sheets, schedules templates, patterns, reports, calculations, instructions, measurements, and similar information not in standard printed form for application to more than one project. Supplier's standard component drawings may be submitted if they clearly show the exact items required for the work, in context with adjacent materials and with such relationships clearly shown. Shop drawings are not part of Contract Documents.
- 1.3.3 **SAMPLES:** As used herein, the term "samples" includes fabricated and unfabricated physical examples of materials, products, and units of work; as complete units or smaller portions of units of work; either for limited visual inspection or, where indicated, for more detailed testing and analysis.
- 1.3.4 **MOCK-UPS:** As used herein, the term "mock-ups" means special on-site or off-site forms of samples, which are too large or otherwise inconvenient for handling in transmittal or submittal form.

1.3.5 MISCELLANEOUS DATA: As used herein, the term "miscellaneous data" means various documents related directly to the work, including project photographs, survey data and reports, physical work records, statements of applicability, copies of certificates, bonds, quality testing and certifying reports, copies of industry standards, record drawings, field measurement data, operation and maintenance materials, overrun stock, security/protection/safety keys, and similar information, devices, materials, which are applicable to the work but not processed as shop drawings, product data, or samples.

1.4 QUALITY ASSURANCE:

1.4.1 GENERAL

A. No extension of time will be granted, nor will consideration be given to claims arising out of CONTRACTOR's failure to submit shop drawings, product data, samples, or related submittals which do not allow adequate lead time for ENGINEER's review, and also do not allow ample time for revision, resubmission, and subsequent review by ENGINEER as required.

1.4.2 PERFORMANCE: Promptly check each submittal for accuracy, completeness, and applicability, and review, approve, and submit - in sequence according to the submittal schedule so as to cause no delay in the work or in the work of OWNER or any separate contractor - all submittals required by the Contract Documents. Identify each submittal to include name of project, specification section, supplier, source, finish, and location of use in the project.

1.4.3 VERIFICATION:

A. By making a submittal to ENGINEER, CONTRACTOR represents that he has approved such submittals and has determined and verified:

1. The applicability of the submittal to the project,
2. all quantities and sizes of materials, detailed fabricating dimensions, temporary erection connections or closures, tolerances and the proper fit and mating with adjacent materials,
3. related field measurements and field construction criteria, and
4. information pertaining to fabrication process and techniques of construction and erection.

B. CONTRACTOR further represents that he has checked and coordinated information contained within such submittal with requirements of the work and of the Contract Documents.

1.4.4 RESPONSIBILITY: CONTRACTOR shall not be relieved of responsibility for any deviation from requirements of the Contract Documents by ENGINEER review of submittals, unless CONTRACTOR has specifically informed ENGINEER in writing of such deviation at the time of submission, and ENGINEER has taken no written exception to the specific deviation. CONTRACTOR shall not be relieved from responsibility for errors or omissions in submittals by ENGINEER's review of or action upon such submittals.

1.4.5 SUBMITTAL VALIDITY: Submittals submitted which are not required to be submitted or are submitted without CONTRACTOR's approval will not be processed by ENGINEER, but will be

returned to CONTRACTOR for his compliance with Contract Document requirements, in which event it shall be deemed that CONTRACTOR has not complied with requirements of the Contract Documents, and CONTRACTOR shall bear responsibility for all delays as if no submittals had been submitted.

- 1.4.6 COMMENCEMENT OF WORK: No portion of the work requiring submittals shall be commenced until submittals have been acted on by ENGINEER. All such portions of the work shall be in accordance with appropriate, required submittals. **All submittals shall be submitted to ENGINEER prior to commencement of project construction.**

1.5 GENERAL SUBMITTAL REQUIREMENTS:

- 1.5.1 SCHEDULING: Where appropriate in various required administrative submittals (listing of products, manufacturers, suppliers, subcontractors, and in the progress schedule), show principal work-related submittal requirements and time schedules for coordination and integration of submittal activity with related work.
- 1.5.2 COORDINATION AND SEQUENCING: Coordinate preparation and processing of submittals with performance of work so that the work will not be delayed by submittals. Coordinate and sequence different categories of submittals for the same work, and for interfacing units of work, so that one will not be delayed by coordination with another. No extension of time will be allowed because of failure to properly coordinate and sequence submittals.
- 1.5.3 PREPARATION OF SUBMITTALS: Provide permanent marking on each submittal to identify project, date, contractor, subcontractor, submittal name, applicable specification section, and similar information to distinguish it from other submittals. Show evidence of CONTRACTOR's review by clearly exhibiting check marks and stamped approval marking acceptance, and provide space for the ENGINEER and ENGINEER's consultant's review or action marking. Package each submittal appropriately for transmittal and handling.
- 1.5.4 SPECIFIC CATEGORY SUBMITTAL REQUIREMENTS: Except as otherwise indicated in individual specifications sections, comply with general requirements specified herein for each indicated submittal category. Furnish and process intermediate submittals, where required between initial and final, similar to initial submittals(s).
- 1.5.5 PROGRESS SCHEDULE: Refer to supplementary conditions for progress schedule requirements.
- 1.5.6 DAILY REPORTS: Furnish copies of each daily report prepared by CONTRACTOR's Project Superintendent to ENGINEER and OWNER. Transmit reports on a daily basis.
- 1.5.7 SHOP DRAWINGS:
- A. Furnish newly-prepared information, on reproducible sheets, with graphic information at accurate scale (except as otherwise indicated), with name of preparer (firm name) indicated thereon. Affix seal of contractor's or fabricator's design engineer where applicable. Show all dimensions and note which are based on field measurement. Identify materials and products in the work shown. Indicate compliance with standards, and special coordination requirements.

- B. Where shop drawings are normally required, and where specifically called for in the specifications, submit to ENGINEER four (4) blue-line or black-line prints of each shop drawing and/or schedule required. Two prints will be returned.
- C. Subsequent submittal(s), if required for correction or confirmation of corrective items, shall be same as initial submittal except as otherwise requested by ENGINEER or specified in conditions of the contract.
- D. Shop drawings and schedules will be reviewed for general conformance with the design concept contained within the Contract Documents.
- E. Do not allow shop drawing copies into field without appropriate final markings by ENGINEER.

1.5.8 PRODUCT DATA:

- A. Collect required data into one submittal for each unit of work or system. Mark each copy in a legible and reproducible manner to show which choices and options are applicable to the project; "highlighting" with colored markers not acceptable. Include manufacturer's standard printed recommendations for application and use, compliance with standards, application of labels and seals, notation of field measurements which have been checked, and special coordination requirements.
- B. Do not submit product data, or allow its use on the project, until compliance with requirements of Contract Documents has been confirmed by CONTRACTOR. Submittals of product data are for information and record, unless otherwise indicated.
- C. The initial submittal will be the only submittal required unless returned promptly by ENGINEER, marked with an action which indicated an observed noncompliance. Submit 4 copies, each marked or labeled with project name, date, contractor, subcontractor, submittal name, applicable specification section, and similar information to distinguish it from other submittals. Provide sufficient space for ENGINEER's action stamp. ENGINEER will retain two copies for himself and return the rest.
- D. Do not proceed with installation of materials, products, or systems, until a copy of applicable product data is in the possession of the installer.
- E. Maintain one set of product data for each submittal at the project site.

1.5.9 PUBLISHED STANDARDS: Where submittal of published standards is required, except where specified integrally with "Product Data" submittals, submit a single copy for ENGINEER's use. Where workmanship at the project site and elsewhere is governed by published standards, furnish additional copies to fabricators, installers and others involved in performance of the work.

1.5.10 CONSTRUCTION PHOTOGRAPHS: Unless otherwise provided in the Contract Documents, OWNER will arrange and pay for construction photographs, and/or videotapes.

PART 2- PRODUCTS - (Not Used)

PART 3 - EXECUTION

3.1 SCHEDULES:

- 3.1.1 SUBMITTAL SCHEDULE: The following scheduled is included as a checklist for convenience only, and may not include all submittals required. Failure to include submittals in this schedule does not relieve CONTRACTOR from providing submittals if required by individual specification sections.

General Requirements		
Section	Title	Submittals Required
01410	Testing and Inspections	N/A - City to provide Testing Services
01700	Contract Closeout	Record documents, Certificates of Compliance, Certificates of Inspection, Warranties, Guaranties, Bonds, Insurance Certificates, Consent of Surety, Releases of Liens, List of subcontractors and suppliers Acknowledgment of date of commencement of warranties and guaranties
Technical Specifications		
Section	Title	Submittals Required
02070	Demolition	Product Data, Shop Drawings, Test Reports
02500	Asphalt	Mix Design Certificates of Compliance, Product Data, Test Reports, Resident-Business Notification, Pavement Repair Membrane, Sign Designs, Crack Patch
02580	Pavement Marking, Signs	Product Data, Test Reports, Certificates of Compliance, sign cut sheet,
02600	Construction Zone Traffic Control	Method for Handling Traffic (MHT)
07900	Crack Seal	

- END OF SECTION -

SECTION 01410 - TESTING AND INSPECTIONS

PART 1 - SUMMARY:

1.1.1 WORK INCLUDED:

- A. This section defines the responsibilities of the various agencies or parties performing testing and inspection services as specified herein or required by the Contract Documents.
- B. Quality assurance testing and inspections will be provided by an independent testing and inspections agency selected and paid for by OWNER.
- C. Cooperate with the selected testing and inspections agency and all others who may be responsible for testing and inspection of the work.

1.1.2 RELATED WORK: Specific testing and inspection requirements are described in the various sections of these specifications. Failure to list specific testing or inspection requirements does not relieve CONTRACTOR from providing all tests, which are indicated to be his responsibility, or from cooperating with the testing and inspections agency.

1.1.3 LIMITATION OF AUTHORITY: The testing and inspections agency is not authorized to release, revoke, or alter the requirements of the Contract Documents, or to approve or accept any portion of the work without ENGINEER's written consent.

1.2 REFERENCES:

1.2.1 RELATED DOCUMENTS: General conditions, supplementary conditions, and applicable provisions of other Division 1 Sections apply to this Section.

1.2.2 REFERENCE STANDARDS: Comply with the requirements of all reference standards, codes, ordinances, rules, and regulations contained in the various sections of these specifications, except where more stringent requirements are listed herein or otherwise required by the Contract Documents. A complete listing of applicable reference standards, including full name of publishing agency and date or number is contained in section 01091.

1.3 DEFINITIONS:

1.3.1 QUALITY ASSURANCE TESTS AND INSPECTIONS: All tests and inspections specified herein or elsewhere in the Contract Documents which are performed by an independent testing and inspections agency to determine compliance of materials, products, equipment, or completed work with the requirements of the Contract Documents.

1.3.2 CODE COMPLIANCE TESTS AND INSPECTIONS: Mandatory tests or inspections required by codes or ordinances, or other authorities having jurisdiction over the work.

1.3.3 CONTRACTOR'S CONVENIENCE TESTS AND INSPECTIONS: Tests or inspections informed exclusively for CONTRACTOR's convenience or information.

1.3.4 RE-TESTING: Subsequent testing or inspections of the work or any portion of the work for which initial testing has indicated non-compliance with the Contract Documents or with applicable codes, ordinances, rules, and regulations.

1.4 SUBMITTALS:

1.4.1 TEST AND INSPECTION REPORTS: Copies of all test and inspection reports will be promptly delivered by the testing and inspections agency directly to OWNER and ENGINEER.

1.5 PAYMENT FOR TESTS AND INSPECTIONS:

1.5.1 INITIAL QUALITY ASSURANCE TESTS AND INSPECTIONS: Paid for by OWNER.

1.5.2 CODE COMPLIANCE TESTS AND INSPECTION: Paid for by CONTRACTOR.

1.5.3 CONTRACTOR'S CONVENIENCE TESTS AND INSPECTIONS: Paid for by CONTRACTOR.

1.5.4 ADDITIONAL OR ALTERNATIVE TESTS AND INSPECTIONS: Paid for by OWNER if the materials or work tested is found to be in compliance with the Contract Documents; otherwise paid for by CONTRACTOR.

1.5.5 RE-TESTING: Paid for by CONTRACTOR.

PART 2 - PRODUCTS - (Not Used)

PART 3 - EXECUTION

3.1 COOPERATION WITH TESTING AND INSPECTIONS AGENCY:

3.1.1 ACCESS TO THE WORK: Representatives of the testing and inspections agency or other legally constituted testing or inspections personnel shall have unrestricted access to the site and all other locations where the work is in progress, including borrow pits, batch plants, material yards, or other locations where materials are being obtained, fabricated, or stored.

3.1.2 FACILITIES FOR TESTING: Provide all necessary facilities required for testing and inspecting the work, including but not limited to, lifts, and suitable safe storage areas for freshly poured concrete test cylinders.

3.1.3 NOTIFICATION: Notify ENGINEER not less than forty-eight (48) hours prior to tentative date or time when testing and inspection services will be required. Re-confirm date and time not less than twenty-four (24) hours prior to time when such services will be required. ENGINEER will schedule testing and inspection agency.

3.2 TEST AND INSPECTION PROCEDURES:

3.2.1 GENERAL: Gathering of specimens or samples, measuring, and testing of all materials, products, or other work shall be performed according to the procedures of the referenced standard test method.

3.2.2 TAKING SPECIMENS: Unless otherwise indicated, all specimens and samples for testing will be taken by the testing and inspections agency personnel, either at the source of the material or at the site for work in progress.

3.2.3 DELIVERY OF SPECIMENS: Unless otherwise indicated, pick-up and delivery of specimens or samples to the testing and inspections agency's laboratory will be done by the agency's personnel. This includes concrete test cylinders, which have been stored on site for the initial curing period.

3.2.4 RE-TESTING: When initial tests or inspections indicate non-compliance of the work or any portion thereof, the non-complying portion shall be removed, replaced, or reworked (re-compacted in the case of subgrade, fill, or backfill material), and re-tested by the same agency performing the initial test or inspection. Do not proceed with additional work until the non-complying work has re-tested and found to be in compliance.

3.2.5 ADDITIONAL OR ALTERNATIVE TESTS:

- A. OWNER and ENGINEER reserve the right to require additional or alternative tests or inspections of materials or work for which either has reason to believe may not be in compliance with the requirements of the Contract Documents.
- B. Examples of such additional tests may include, but are not limited to, additional sieve analysis of aggregates or granular fill material; additional field density tests of subgrade, fill, or backfill materials; additional slump tests of concrete as it is being placed; core tests of in-place structural concrete; load testing of concrete structures; x-ray or other non-destructive testing of structural steel; and field-cut test strips of membrane roofing.
- C. Payment for additional or alternative tests will be determined as provided herein above.

3.3 SCHEDULES:

3.3.1 SCHEDULE OF QUALITY CONTROL TESTS AND INSPECTIONS:

- A. The following schedule is included for information only, as a convenience to CONTRACTOR, and is not intended to limit the number and type of tests to be performed by the testing and inspections agency.
- B. Carefully examine the individual sections of these specifications for additional or complete quality control testing and inspections requirements. Failure to include any test or inspection in this schedule does not relieve CONTRACTOR from the testing and inspection requirements contained in the individual sections of the specifications.
- C. This schedule includes quality control tests and inspections only, which will be performed by the selected testing and inspections agency and paid for as previously mentioned in Article 13 of the General Conditions. Code compliance tests and inspections, contractor's convenience tests and inspections, and additional or alternative tests and inspections requested by the City are not included.

Section	Description of Test or Inspection	Test Qty/Interval
Earthwork	Fill and Backfill Material (Lab): Moisture Content – ASTM D2216 Max. Index Density – ASTM D4253 Moisture/Density Rel. – ASTM D698 or ASTM D1557 Plasticity Index – ASTM D4318 Particle Size Analysis – ASTM D422 Field Density Tests – ASTM D1556, D2167, or D2922 Field Moisture Tests – ASTM D3017 Subgrade: Fill, Bldg., and Paved Areas: Backfill: Site and Misc. Fills:	1 each test/soil type One/500 sf One/500 sf per lift One/250 sf/2 ft vert. One/500 sf/1 ft vert.
Utilities	Bedding Material (Lab): Particle Size Analysis – ASTM D422 Backfill Material (Lab): Moisture/Density Relation – ASTM D698 or D1557 Field Density Tests – ASTM D1556, D2167, or D2922 Field Moisture Tests – ASTM D3017:	1/soil type 1/soil type One/150 lf @ trench bottom at 2 ft vert. intervals, and at top
Paving	Asphalt Content – ASTM D2172 Asphalt Gradation – ASTM C136 Bulk Specific Gravity – ASTM D1188 AASHTO T166 Marshall Test – ASTM D1559	One each/500 tons, min. 2/day
Concrete	Concrete Quality: Fresh Concrete – ASTM C172 Compressive Strength – ASTM C39 Unit Weight – ASTM C138 Slump – ASTM C142 Air Content – ASTM C173 or C231 Hardened Concrete (failings only): ASTM C42, C803, C805, or load tests	One each/50 CY or major fraction thereof; min. 1/pour One each/truck As determined by ENGINEER

- END OF SECTION -

SECTION 01500 - TEMPORARY FACILITIES, CONTROLS, AND SERVICES

PART 1 - GENERAL

1.1 SUMMARY:

- 1.1.1 WORK INCLUDED: Provide temporary utilities and miscellaneous temporary facilities required during construction, including installation, maintenance, and removal upon completion of the work.

1.2 REFERENCES:

1.2.1 RELATED DOCUMENTS:

- A. General conditions, supplementary conditions, and applicable provisions of other Division 1 sections apply to this section.
- B. Section 02600 Construction Zone Traffic Control.

PART 2 - PRODUCTS

2.1 TEMPORARY CONSTRUCTION FACILITIES:

- 2.1.1 STORAGE STRUCTURES: Provide enclosed, weather tight storage facilities for materials and equipment, which require protection from the elements.

2.1.2 SANITARY FACILITIES:

- A. Provide temporary toilet facilities for duration of work, for use by any and all employees engaged in the work. Comply with requirements of applicable codes, regulations, laws, and ordinances.
- B. **ENGINEER shall approve locations of all temporary toilet facilities for the work. CONTRACTOR shall instruct any and all employees engaged in the work to use the designated temporary toilet facility or other approved toilet facility.**

2.1.3 FENCES AND BARRICADES:

- A. Provide temporary orange fences along the property owner side of the construction limits as shown on the plans. In the remaining work areas and streets provide traffic control devices as may be specified elsewhere within certain sections of the specifications, and as may be required by local code or authority and as required to maintain safety of work place.
- B. Maintain temporary fences, bulkheads, and other protective facilities in good condition throughout the term of the work. Remove at completion of the work and replace or repair all work damaged thereby. Repair or replace on a daily basis safety facilities or devices damaged or removed during the course of the work.

2.1.4 CONSTRUCTION STAGING

- A. Coordinate construction activities with the property and business owners to minimize impacts.
- B. CONTRACTOR will not be permitted to operate trucks and equipment or store equipment and supplies on private property unless he has written permission to do so.

2.1.5 STORAGE OF MATERIALS/EQUIPMENT, ETC.

- A. CONTRACTOR shall not be allowed to park any vehicles (including worker's personal vehicles) or equipment in any on-street parking spaces that are open to traffic.
- B. No construction trailers or storage yards will be allowed in the work area and neighborhood. CONTRACTOR shall locate trailer/storage yard subject to approval of ENGINEER.

2.3 TEMPORARY CONTROLS

- A. Noise Control. Equip construction machinery and vehicles with practical sound and muffling devices and operate in a manner to minimize noise consistent with efficient performance of the work.
- B. Dust Control.
 - 1. Take reasonable measures to prevent unnecessary dust.
 - 2. Moisten dirt roads used for transportation and haul with water or apply a chemical dust suppressant to control dust.
 - 3. Cover dusty material in transit when necessary to prevent blowing.
- C. Pollution Control.
 - 1. Prevent the pollution of drains and watercourses by sanitary wastes, sediment, debris, and other substances resulting from construction activities.
 - 2. Retain all spent oils, hydraulic fluids, and other petroleum fluids in containers for disposal off the site.
 - 3. Do not perform equipment maintenance or fueling within 50 feet of any water course.
- D. Erosion Control.
 - 1. Take such measures as are necessary to prevent erosion of soil on the site and adjacent properties that might result from construction activities.

2. Provide temporary materials such as hay bales, sand bags, or plastic sheets, to prevent the erosion of banks or excavation where runoff may be increased or concentrated due to construction activities.
3. Take such measures as are necessary to prevent soil, mud, debris, etc. from entering the storm sewer system. CONTRACTOR shall be responsible for cleaning existing storm sewer downstream of the site if any soil, mud, debris, etc. enter it from the site. ENGINEER shall inspect system prior to final inspection and required cleaning will be noted on the punch list. CONTRACTOR shall clean to the satisfaction of ENGINEER.

2.4 OTHER TEMPORARY SERVICES:

2.4.1 CLEANING:

- A. Provide daily sweeping and cleanup of dust, debris, litter, trash containers, and other items required to maintain a clean, orderly, and accessible site. Hauling of debris to legal dump or landfill is required daily as a minimum.
- B. Provide daily sweeping or cleaning of adjacent streets and walkways as required to prevent accumulation of mud, dust, or soil thereon from construction traffic and personnel.
- C. CONTRACTOR shall at his/her own expense clean up and remove all refuse and unused materials of any kind resulting from the work. Upon failure to do so within seventy-two (72) hours after request by ENGINEER, the work may be done by OWNER and the cost thereof be charged to CONTRACTOR and deducted from his/her final estimate.

2.4.2 ACCESS RAMPS:

- A. During resurfacing activities (milling and leveling) provide hard surface ramps as directed by ENGINEER to access private property, public property, pedestrian crossings, streets, and alleys.

2.4.3 OWNER-MAINTAINED FACILITIES:

- A. During construction activities including but not limited to demolition, unclassified excavation, subgrade cement treatment, and asphalt paving, CONTRACTOR shall protect from damage all OWNER-maintained facilities. Street signage, storm sewer inlets and manholes, sanitary sewer manholes, water main valve boxes, and water service curb stop boxes damaged or backfilled during construction shall be repaired, replaced, and made accessible. Backfilled manholes and inlets shall be cleaned immediately. Upon failure to repair, replace, or clean OWNER-maintained facilities promptly, the work may be completed by OWNER and the cost thereof be charged to CONTRACTOR and deducted from his/her final estimate.

PART 3 - EXECUTION

3.1 MAINTENANCE OF TEMPORARY FACILITIES:

- 3.1.1 TEMPORARY STRUCTURES: Maintain temporary offices, storage facilities, sanitary facilities, fire protection facilities, trailers, fences, barricades, and other structures in a neat, orderly appearance for the duration of the work.
- 3.1.2 REMOVAL OF TEMPORARY FACILITIES: Remove temporary facilities and structures from the site as soon as practicable or when no longer required by CONTRACTOR or subcontractors. Restore areas occupied by temporary facilities to like new condition, or to match surrounding areas.

PART 4 - MEASUREMENT AND PAYMENT

4.1 SUMMARY

- 4.1.1 Temporary Facilities and Controls and Services will not be paid for separately but shall be included in the work.

- END OF SECTION -

SECTION 01700 - CONTRACT CLOSEOUT

PART 1 - GENERAL

1.1 SUMMARY:

- 1.1.1 WORK INCLUDED: This section includes administrative procedures and closeout submittals required at substantial completion and final completion of the work.
- 1.1.2 RELATED WORK: Additional specific requirements are specified in the various sections of these specifications.

1.2 REFERENCES:

- 1.2.1 RELATED DOCUMENTS: General conditions, supplementary conditions, and applicable provisions of these specifications apply to this section.

1.3 DEFINITIONS:

- 1.3.1 CONTRACT CLOSEOUT: Contract closeout is defined to include general administrative requirements near the end of the contract time, in preparation for final acceptance, final payment, normal completion of the contract, occupancy by OWNER, and similar actions evidencing completion of the work. Time of closeout is directly related to substantial completion, and therefore may be either a single time period for the entire work or a series of time periods for individual parts of the work which have been certified as substantially complete at different dates. That time variation, if any, shall be applicable to other provisions of this section.

1.4 SUBMITTALS

1.4.1 RECORD DOCUMENTS - GENERAL:

- A. Additional or specific requirements for record documents are indicated in individual sections of these specifications.
- B. Do not use record documents for construction purposes; protect from deterioration and loss in a secure, fire resistive location.
- C. Provide access to record documents for ENGINEER's or OWNER's reference during normal working hours.
- D. Review record documents for progress and accuracy at regularly scheduled job progress meetings.
- E. Upon completion of mark-up, submit record documents to ENGINEER for OWNER's records.

1.4.2 RECORD DRAWINGS (FIELD SET):

- A. Maintain at the project site during the course of the work a white print set (blue line or black line) of contract drawings and shop drawings in clean, undamaged condition, with mark-ups of actual installations which vary substantially from the work as originally shown.
- B. Mark whichever drawing is most capable of showing "field" condition fully and accurately; however, where shop drawings are used for mark up, record a cross reference at corresponding locations on the contract drawings.
- C. Mark changes or deviations with red erasable pencil. Where feasible, use other colors to distinguish between variations in separate categories of work.
- D. Record new information, which is recognized to be of importance to OWNER but was not shown on either the contract drawings or shop drawings. Give particular attention to concealed work which would be difficult to measure and record at a later date. Note related change order or field order numbers where applicable.
- E. Record all deviations in sizes, locations, or other features of work from the Contract Documents. It shall be possible, using these drawings, to correctly and easily locate, identify, and establish sizes of all piping, directions of flow, and other features of the work which will be concealed in finished work or underground.
- F. Establish locations of concealed and underground work by accurate dimensions to column lines or permanent walls, locating all bends or turns, and properly referencing invert elevations and rates of fall.
- G. Organize record drawing sheets into manageable sets, bind with durable paper cover sheets, and print suitable titles, dates, and other identification on cover of each set.

1.4.3 FINAL RECORD DRAWINGS (AS-BUILTS):

- A. Submit the final marked-up field copy of record drawings to ENGINEER for review and approval.

1.4.4 RECORD SPECIFICATIONS:

- A. Maintain one copy of specifications, including addenda, change orders, and similar modifications issued in printed form during construction. Mark up variations of substance in actual work in comparison with text of specifications and modifications as issued.
- B. Give particular attention to substitutions, selection of options, and similar information on work where it is concealed or cannot otherwise be readily discerned at a later date by direct observation.
- C. Note related record drawing information and product data where applicable.

- D. Label record specifications with the words "RECORD COPY" and the date submitted, stamped or neatly printed in block letters on the cover.

1.4.5 OTHER DOCUMENTS: Submit the required number of the following additional documents, which may be required by the various specification sections:

- 1) Certificates of compliance with applicable reference standards.
- 2) Certificates of inspection or other evidence of compliance with governmental agencies or authorities having jurisdiction over the work.
- 3) Warranties, guarantees, and bonds.
- 4) Certificates of insurance for products and completed operations.
- 5) Written consent of surety.
- 6) Evidence of payment and release of liens for subcontractors, suppliers, and other goods and services (Claims Release Forms).
- 7) Certificate of substantial completion form signed by CONTRACTOR accepting the date of substantial completion.
- 8) Final Inspection report signed by CONTRACTOR.
- 9) Certificate of final completion signed by CONTRACTOR acknowledging the date of final completion.
- 10) Operations and maintenance manuals as required.

PART 2 - PRODUCTS - (Not Used)

PART 3 - EXECUTION

3.1 PREREQUISITES:

3.1.1 FINAL COMPLETION: Prior to requesting the City's final observation for certification of final acceptance and payment, as required by the general and supplemental conditions, complete the following:

- 1) Submit final payment request with final releases and supporting documentation not previously submitted and accepted. Include certificates of insurance for products and completed operations where required. List known exceptions to final completion of the work, if any, in the request.
- 2) Submit updated final statement, accounting for additional changes to contract sum.
- 3) Submit certified copy of final punch list of itemized work to be completed or corrected, stating that each item has been completed or otherwise resolved for acceptance. All surfaces must be cleaned and free of tack.
- 4) Submit written consent of surety.
- 5) Revise and submit evidence of final, continuing insurance coverage complying with insurance requirements.

PART 4 - MEASUREMENT AND PAYMENT

4.1 SUMMARY

- 4.1.1 Temporary Facilities and Controls and Services will not be paid for separately but shall be included in the work.

- END OF SECTION -

SECTION 02070 - DEMOLITION

TECHNICAL SPECIFICATIONS

- 1.0 SUMMARY OF WORK
- 2.0 PRODUCTS
- 3.0 EXECUTION
- 4.0 MEASUREMENT AND PAYMENT - DEMOLITION

PART 1 - GENERAL

1.1 SUMMARY:

- 1.1.1 **WORK INCLUDED:** Work of this section generally includes demolition and removal of certain items within the limits of the project in order to accommodate new or retrofit construction.
- 1.1.2 Demolition includes but is not limited to the following: demolition of existing pavements, curbs and gutters, sidewalks, miscellaneous concrete slabs, aggregate base course, shrubs, sod, signs and posts, tree roots, stumps when within structure or pipe excavation, water service line, ductile iron pipe, valves, fittings, reinforced concrete pipe, corrugated metal pipe, inlets, fencing, miscellaneous equipment and appurtenances and all other elements scheduled to be so demolished or removed or that may be reasonably implied to complete the site improvements. It also includes all saw cutting required and/or specified on the drawings. Demolition also includes hauling away of all materials described on the plans or that may be reasonably implied to be hauled away. Demolition also includes excavation, backfill, and compaction at elements not scheduled for replacement.

1.2 REFERENCES:

- 1.2.1 **RELATED DOCUMENTS:** General Requirements, General Conditions, Supplementary Conditions, and applicable provisions of Division 1 section supply to this section.
- 1.2.2 **ORDINANCES AND STANDARDS:** Perform the work in accordance with requirements of all applicable laws, codes, and ordinances.

1.3 JOBSITE CONDITIONS:

- 1.3.1 **SALVAGED MATERIALS:** Items of salvage value to CONTRACTOR that are not indicated to remain the property of the City may be removed from the property as work progresses. Salvaged items must be transported from site as they are removed. Storage or sale of removed items on site will not be permitted.
- 1.3.2 **EXPLOSIVES:** Use of explosives will not be permitted.
- 1.3.3 **PROTECTION OF PERSONS AND PROPERTY:**
- A. Ensure safe passage of persons around area of demolition. Conduct operations to prevent injury to adjacent buildings, structures, other facilities, improvements, and utilities designated to remain, and persons.
 - B. Provide interior and exterior temporary shoring, bracing, or support as required to prevent movement, settlement, or collapse of structures to be demolished, or of adjacent facilities and pavements indicated to remain.
 - C. Comply with all applicable regulations of the Occupational Safety and Health and Administration (OSHA) concerning the safety of workers and authorized visitors to the site.

1.3.4 DAMAGES: Promptly report damages caused to adjacent facilities and improvements by demolition operations to the City and ENGINEER. Repair damage at no additional cost to the City.

1.3.5. UTILITY SERVICES:

- A. Utility locations and sizes indicated on the drawings incorporate best available information; however, it shall be the responsibility of CONTRACTOR to make an accurate survey of existing conditions and verify locations with utility companies prior to commencing demolition work.
- B. Maintain existing utilities serving adjacent occupied facilities and protect against damage during demolition operations.
- C. Notify proper utility agencies to confirm or arrange for shut-off of affected utilities. Disconnect and seal indicated utilities before starting demolition operations.
- D. In case of damage to existing utility lines caused by the execution of this work, immediately notify the appropriate utility agency, and repair said damage according to the requirements of the utility agency, at no additional cost to the City.

PART 2 - PRODUCTS

(Not applicable to this Section)

PART 3 - EXECUTION

3.1 EXAMINATION:

3.1.1 VERIFICATION OF CONDITIONS: Examine areas and conditions under which the work of this section will be performed. Commencement of work implies acceptance of all areas and conditions.

3.2 DEMOLITION:

3.2.1 POLLUTION CONTROLS: Use water sprinkling, temporary enclosures, and other suitable methods to limit dust and dirt raising and scattering in air to lowest practical level. Comply with governing regulations pertaining to environmental protection. Provide and pay for all water and necessary connections therefore.

3.2.2 GENERAL PROCEDURES:

- A. By careful examination of the plans, determine the location and extent of the demolition required.
- B. In company of ENGINEER, visit the site and verify the extent and location of the demolition required.
 - 1. Carefully identify limits of demolition.

2. Mark interface surfaces as required to enable workmen to identify items to be removed and items to be left in place intact.
- C. Prepare and follow an organized plan for demolition and removal of items.
1. Demolition plan shall be in accordance with the construction phasing/staging requirements set forth in the Supplementary Conditions.
 2. Where existing concrete sidewalk is to be retained for use, that portion shall not be damaged during the removal operations. Where designated on the plans, existing concrete and asphalt shall be sawcut to the lines and dimensions shown on the plans or as designated by ENGINEER.
- D. Demolish concrete in sections of limited size and area to minimize hazards.
- E. Break up and remove concrete slabs-on-grade, sidewalks ramps, driveways, parkways and miscellaneous placements within limit lines shown. Saw cut edges where adjacent materials are designated to remain.
- F. Unless otherwise noted, demolished material shall be considered to be property of CONTRACTOR and shall be completely removed from the project and disposed of by CONTRACTOR.
- G. Use means necessary to prevent dust becoming a nuisance to the public, to businesses, and to other work being performed on or near the site.

3.2.3 CLEARING AND GRUBBING:

3.3.1 POLLUTION CONTROLS: Use water sprinkling, temporary enclosures, and other suitable methods to limit dust and dirt raising and scattering in air to lowest practical level. Comply with governing regulations pertaining to environmental protection. Provide and pay for all water and necessary connections therefore.

3.3.2 GENERAL PROCEDURES:

- A. Prior to topsoil stripping, all topsoil shall be made to be free from surface vegetation over six inches in height, trash, stones, and all other debris by clearing and grubbing. ENGINEER will establish the limits for clearing and grubbing and designate all trees, shrubs, plants, concrete pads, and other items that are to be removed. Unless otherwise specified, all material cleared and grubbed shall be disposed of by CONTRACTOR.
- B. CONTRACTOR shall take all appropriate precautions to protect trees that are not marked for removal. All tree removals shall include pulling from the ground and removing the root ball (stump) of all removed trees. In no case will grinding the root ball be allowed. Removal of trees shall be included in the cost of Clearing and Grubbing.
- C. Where topsoil stripping requirements are not outlined, the entire thickness of existing topsoil shall be stripped. Topsoil that is temporarily stockpiled for re-spreading on the project shall be piled within the construction limits delineated by ENGINEER. Where the plans call for permanent stockpiling of topsoil, the costs to haul and shape the material

to a drainable, mowable stockpile shall be included in the contract price for clearing and grubbing.

3.3.3 PROTECTION OF ITEMS TO REMAIN OR BE REINSTALLED

- A. Those items designated to be removed and reinstalled shall be carefully removed, stored, and protected from damage.
- B. Protection Trees to remain:
 - 1. Trees not designated to be removed shall be protected at all times during the entire contract period. No material or equipment shall be stockpiled in a manner that could cause damage to the trees.
 - 2. Any trees damaged or scarred during construction shall be repaired immediately by an approved tree surgeon. Where separating, exposing, or damage to the root systems of trees designated to remain, remedial measures shall be taken immediately at the direction of ENGINEER to insure the health of the tree. Trees designated to remain, but damaged beyond repair in the opinion of ENGINEER, shall be replaced with a similar size and species chosen by ENGINEER at CONTRACTOR's expense.

3.2.4 CLEANING: Clean adjacent finishes, structures, and improvements of dust, dirt, and debris caused by demolition operations, as directed by ENGINEER or governing authorities. Return adjacent areas to conditions existing prior to start of work.

3.2.5 BELOW-GRADE CONSTRUCTION:

3.2.6 GENERAL: Demolish and remove indicated below-grade improvements and non-soil materials encountered, except where specifically identified as items to remain.

3.2.7 BACKFILLING:

- A. Completely fill below-grade utility trenches, excavations, and voids resulting from demolition of structures, using material as specified in these specifications.
- B. Prior to placement of fill materials, ensure that areas to be filled are free of standing water, trash, and debris.
- C. Place materials in horizontal layers not exceeding 8" in loose depth. Compact each layer of fill material to density required by these specifications.
- D. After fill placement, grade surface to meet adjacent contours.

3.3 DISPOSAL OF DEMOLISHED MATERIALS:

3.3.1 GENERAL: Remove debris, rubbish, and other materials resulting from demolition operations from site. Transport materials removed from demolished structures and legally dispose of offsite.

3.3.2 BURNING: Onsite burning of removed materials from demolished structures will not be permitted.

3.4 REPLACEMENTS

A. In the event of demolition of items not so scheduled to be demolished, CONTRACTOR shall promptly replace such items to the approval of ENGINEER and at no additional cost to OWNER.

PART 4 - MEASUREMENT AND PAYMENT

4.1 Demolition will not be paid for separately but shall be included in the work.

- END OF SECTION -

SECTION 02450-C - CEMENT

TECHNICAL SPECIFICATIONS

SUBGRADE CEMENT TREATMENT

1.1 DESCRIPTION

This work consists of the contractor constructing one or more courses of a mixture of subgrade soil, approved stabilizing agent and water in substantial conformity with the design line, grades, thicknesses, and typical cross sections shown on the approved plans.

1.1.1 Purpose

The purpose of the work shall be to provide a structural section on which paving materials can be placed and to meet design specifications, while at the same time, protecting the underlying moisture conditioned subgrade soils.

2.1 MATERIALS

2.1.1 Stabilizing Agent

The pre-approved stabilizing agent is listed in the table below.

PRE-APPROVED STABILIZING AGENT		
Agents	Must conform to requirements of	
Portland Cement	ASTM	C 114

Stabilizing agent shall come from the same source as used in the design. If the source is changed, a new design must be submitted for the **OWNER's** approval. Each lot of stabilizing agent furnished shall have the supplier's certificate of compliance.

2.1.2 Water

Water used for mixing or curing shall be from a potable source. Non-potable water shall be tested in accordance with and meet the requirements of AASHTO T 26.

2.1.3 Subgrade

The subgrade to be stabilized shall be free of roots, sod, weeds, wood, construction debris, ice, snow, or other frozen materials, deleterious matter, and stones larger than 3 inches. Material in the stabilized zone shall have a soluble sulfate content of less than 0.5 percent. If the subgrade soils have a soluble sulfate content exceeding 0.5 percent,

the mix design shall be addressed to the specific methodology used to prevent adverse sulfate reactions.

2.1.4 Sealant

Emulsified asphalt is the only pre-approved sealant; no other sealant may be utilized without prior written approval of the **OWNER**. Emulsified asphalt used for a bituminous seal shall conform to requirements in the table below.

PRE-APPROVED SEALANTS			
Sealant	Type	Requirements	
Emulsified Asphalt	SS-1	ASTM	D 977
Emulsified Asphalt	SS-1h	ASTM	D 977
Emulsified Asphalt	CSS-1	ASTM	D 2397
Emulsified Asphalt	CSS-1h	ASTM	D 2397

3.1 EQUIPMENT

All equipment shall be subject to approval by the **OWNER**. All equipment and machinery shall be kept in good working order, free of leaks and properly muffled.

3.1.1 Dry Application Equipment

Equipment for spreading dry stabilizing agent shall be of an approved screw-type spreader box, mixer, or other semi enclosed equipment, which is equipped with a metering device. Spreading of stabilizing agents by aggregate spreaders or motor- graders will not be allowed.

3.1.2 Mixing Equipment

Mixing equipment shall be of sufficient size to adequately mix the stabilizing agent into the soil and to pulverize the mixture according to the requirements of 5.6. The size of the mixer shall be adequate to mix and pulverize the mixture to a minimum depth of 12 inches in a single pass. Blades, discs, and similar equipment are not allowed without prior written approval of the **OWNER**.

3.1.3 Compaction Equipment

Compaction equipment shall be in good working order and of sufficient size and effective force to achieve the required compactive effort as prescribed in sec 5.6.

3.2 CONSTRUCTION SUBMITTALS

At least 15 days prior to commencing stabilization work, the **CONTRACTOR** shall furnish the following information to the **OWNER**:

1. The source and supplier of stabilizing agent and certifications, including purity of stabilizing agent, from the manufacturer's testing agency indicating that the stabilizing agent meets the appropriate requirements.
2. Description of the proposed construction equipment, construction methods, expected production rates and planned sequence of construction.
3. A mix design giving the percentage of stabilizing agent, source of the agent, properties and any special considerations.

For each day's work, the **CONTRACTOR** shall furnish the following information to the **OWNER** by the following day:

- A. Certified truck weight tickets of stabilizing agent, delivered or used at the site.
- B. A summary of the amount of stabilizing agent used each day, areas stabilized and compacted.

3.3 STABILIZED MIX DESIGN

Mix designs shall be performed under the supervision of and signed by a Professional Engineer registered in the State of Colorado. Laboratories shall be accredited by either AASHTO or A2LA. **OWNER** shall provide the subgrade stabilization mix design. **For the 2025 Street Resurfacing Project provide 6% Portland Cement per cubic foot of subgrade material stabilized (based on the weight of the cement and the dry unit weight of the soil). Minimum depth of subgrade cement treatment shall be 12 inches.**

Mix design shall comply with the following requirements in the table below:

STABILIZATION MIX DESIGN REQUIREMENTS

Stabilization Agent	Maximum Plasticity Index (%) Note 1	Maximum Swell Potential (%) Note 2	Minimum Unconfined Compressive Strength (psi) Note 3
Portland Cement	10	1.0	160

Note:

1. Plasticity Index is to be less than 10, per AASHTO T 89 and T 90 unless a greater value is acceptable by the ENGINEER.
2. Swell Potential to be less than 1.0 percent at 200 psf, ASTM D 4546.
3. Minimum of 160 psi ($M_R > 34,800$ psi, where $M_R = 10,000 + 124q_U$) in five (5) days of moist curing at 100°F (38°C). Testing is in accordance with ASTM D 1633 Method A for pozzolanic agents and ASTM D 5102 Procedure B for Hydrated Lime.
4. The design stabilizing agent percentage shall be increased by 0.5 percent to account for waste, inert materials, and construction variability.

3.4 PROCESSING MATERIALS

It is the primary requirement of this specification to secure a completed subgrade structural section

containing a uniform stabilized mixture. The mixture is to have a uniform density and moisture content, free from loose or segregated areas, well bound for its full depth, well cured, and with a surface suitable for placing subsequent courses.

It shall be the responsibility of the **CONTRACTOR** to regulate the sequence of his work, to use the proper amount of stabilizing agent, maintain the work, and rework the courses, as necessary, to meet the requirements.

3.4.1 Application

The subgrade shall not be treated when the ambient air temperature falls below freezing or the subgrade material is below 40° F, or when weather predictions suggest that subgrade material temperature may fall below 40° F within 24 hours, unless prior written approval of the **OWNER** has been issued. **Prior to beginning any treatment, the subgrade shall also be constructed and finished to a smooth and uniform surface that is in conformity to the grade and typical section specified. CONTRACTOR shall account for potential soil swell caused by addition of subgrade cement. Prior to application of stabilization agent, ENGINEER to confirm and approve line and grade of subgrade.** Variation from the subgrade plan elevation specified shall not be more than ± 0.04 ft. The in-place density shall be at least 95% of maximum dry density as determined by ASTM D 698, Standard Proctor Density, and within 0 to 3% of optimum moisture content.

Stabilizing agent shall be applied at the minimum rate for the depth of stabilized subgrade specified. The rate shall be determined from a design using the on-site soils and shall meet the requirements found in Item 5.5. Rate of application shall be verified using area/quantity calculations or testing of stabilized subgrade. Stabilizing agent shall be spread only on that area where the first mixing operations can be completed during the same working day.

The **OWNER** or **ENGINEER** reserves the right to require variation of the rate of application of stabilizing agent from the mix design application rates during the progress of construction as necessary to maintain the desired characteristics of the stabilized subgrade.

Stabilizing agent shall be applied using the following methods:

3.4.1.1 Dry Placement

The amount of stabilizing agent spread shall be the amount required for mixing to the specified depth, which will result in the percentage specified by the design.

The stabilizing agent shall be distributed in such a manner that scattering by wind will be minimal. Agents shall not be applied when wind conditions, in the opinion of the **OWNER**, are detrimental to a proper application. The blended material shall be sprinkled or watered until moisture content is as specified in subgrade stabilization design.

After spreading of stabilizing agent and during mixing, water shall be added to hydrate the agent and to reduce dusting. The combination of stabilizing agent, soil and water shall be called the mixture.

3.4.1.2 High Sulfate Treatment

Where sulfates are over 0.5 percent and less than 1.0 percent the **ENGINEER** will address the method of treatment.

3.4.2 Mixing

No stabilization shall take place when precipitation may cause damage to the subgrade, as determined by the **OWNER**. Mixing shall be continuous. The full depth of the treated subgrade material shall be mixed with an approved mixing machine to the specified depth below the bottom of the pavement structure and/or curb. The mixing machine shall make a sufficient number of passes to adequately achieve 100 percent of the material passing the one-inch sieve and 60 percent passing the 1/4-inch sieve. Water shall be added to the subgrade during mixing to provide a moisture content of at least 3 percent above the optimum moisture of the mixture or as specified in subgrade stabilization design.

Mixing and remixing will be performed, as necessary, to assist the stabilizing agent-soil reaction and produce a homogeneous mixture. Mixing and remixing shall continue until the combination of stabilizing agent and subgrade material is free of streaks or pockets of stabilizing agent.

3.5 **COMPACTION**

Compaction of the mixture, for the full depth of the stabilized subgrade shall begin as soon as practical after final mixing. Stabilized subgrade with cementitious stabilization agent shall be completed within 90 minutes of the time cementitious stabilization agent or water is applied. The field density of the compacted mixture shall be at least 95 percent of the maximum dry density of laboratory specimens prepared from samples taken from the treated subgrade material immediately prior to compacting. The specimens shall be compacted and tested in accordance with ASTM D 698 or ASTM D 558, as specified in subgrade stabilization design. The in-place field density shall be determined in accordance with ASTM D 1556, ASTM D 2167 or ASTM D 2922. The moisture content of the mixture shall be between 0 to 3 percent above the optimum moisture content. The optimum moisture content shall be determined in accordance with ASTM D 698 or ASTM D 558, as specified in subgrade stabilization design.

Initial compaction shall be done by means of a sheep foot or segmented wheel roller. Final compaction shall be by means of a smooth wheel or pneumatic tired roller. Areas inaccessible to a mechanical roller shall be compacted to the required density by other means suitable to the **ENGINEER** or **OWNER**.

All irregularities, depressions, or weak spots which develop, as determined by the **OWNER**, shall be corrected immediately by scarifying the areas affected, adding or removing materials as required, and reshaping and recompacting by moisture conditioning and rolling. Adding additional stabilized material to an initial cured section, resulting in lamination and potential slip plane, is not allowed. The surface of the course shall be maintained in a smooth condition, free from undulations and ruts, until other work is placed thereon or the work is accepted. Should the material, due to any reason or cause, lose the required stability, density, and finish before the next course or pavement is placed, it shall be corrected and refinished at the sole expense of the **CONTRACTOR**, as directed by the **ENGINEER**.

3.6 FINISHING AND CURING

After the final layer of stabilized subgrade has been compacted, the shape of the surface shall be maintained by blading. The surface shall be smooth and conform to the required lines, sections, and grades, in accordance with the plans and thoroughly cured, or to within a minimum of 0.04 foot above the finished subgrade elevation to allow for trimming to final grade prior to placement of surface coarse. The completed section shall then be finished by rolling with suitable pneumatic tired equipment with sufficiently light effort to prevent hairline cracking.

Curing may be accomplished by periodic water application to maintain moisture content preventing sloughing or cracking in the surface of the stabilized subgrade to a depth no greater than 0.1 foot, or by the utilization of a bituminous seal. When bituminous seal (Section 5.2.4) is utilized, the minimum application will be at the rate of 0.12 gallons per square yard, as directed by the **ENGINEER** and approved by the **OWNER**.

The completed section shall be cured for a minimum of 3 days before further courses are added or any traffic is permitted, unless otherwise permitted by the **OWNER**. The moisture cured duration may be reduced if a non-yielding surface is obtained to support construction traffic and either the next layer of stabilized soils are placed or the pavement layer is constructed, as approved by the **OWNER**.

If the surface of the finished layer is above the approved plan elevation tolerance specified in this section, the excess material shall be trimmed, removed, and disposed of. Any low areas will be replaced with the subsequent surface courses. No loose material shall be left in place after trimming. After trimming the stabilized subgrade surface shall be rolled again with a steel wheel or pneumatic tired roller to seal the surface.

3.7 TOLERANCES

3.7.1 Thickness

Stabilized zone thickness shall be verified by the use of phenolphthalein and shall be performed at intervals of approximately every 500-feet in each lane. When the measurement of the thickness is deficient by more than 1 inch from the plan thickness, two additional locations shall be measured randomly within the deficient area and used in determining the average thickness. When the average thickness is deficient by more than 1 inch, the entire area shall be reprocessed to meet the design parameters or the roadway design section must be re-evaluated (Section 5.10).

3.7.2 Grade

Prior to placement of surface course, any deviation in excess of 1/2 inch in cross-section and 1/2 inch in 10 feet measured longitudinally shall be corrected. Variations in excess of this tolerance shall be corrected by the **CONTRACTOR**, at the **CONTRACTOR's** expense, in a manner satisfactory to the **OWNER**. Thickness requirements shall be met in areas corrected for grade.

3.7.3 Strength

The stabilized subgrade must develop a laboratory compressive strength of at least 160-psi at 5 days in accordance with Table 5.11. Samples shall be molded from stabilized soil within 1.5 hours of final mixing with the material compacted per ASTM D 558 or ASTM D 698, as specified in subgrade stabilization design, at the field moisture content.

3.7.4 Stabilizing Agent Percentage

The percentage of stabilizing agent placed in the mixture shall be determined by the appropriate AASHTO chemical determination and/or by calculation of stabilizing agent used for the volume of subgrade material stabilized. When the test result is deficient by more than 1 percent, the entire area shall be re-treated at the **CONTRACTOR's** expense.

3.8 CONFORMITY WITH PLANS AND SPECIFICATIONS

When thickness and/or strength criteria fail to meet design parameters, even after all possible attempts have been made to correct said deviations; remediation will be required as listed in table below. Evaluation of the roadway pavement section will be made by the **ENGINEER** with written approval of the **OWNER**. The pavement structural section shall be adjusted to compensate for any deficiency in the stabilized subgrade thickness and strength, at the **CONTRACTOR's** expense. Placement of subsequent surface coarse will not occur until both the **ENGINEER** and the **OWNER** has accepted the stabilized subgrade, in writing.

Deficiency	Remediation
< 25 % of design thickness	Evaluate Roadway design section
> 25 % of design thickness	Remove and replace
< 25% of required strength	Evaluate Roadway design section
> 25% of required strength	Remove and replace

4.1 MEASUREMENT AND PAYMENT

Payment will be made on an installed field measured square yard basis. Payment for SUBGRADE CEMENT TREATMENT shall be full compensation for all work necessary to complete the item.

Stabilizing agent shall not be paid for separately but shall be included in the work. The price for SUBGRADE CEMENT TREATMENT shall be full compensation for furnishing all material and for all

preparation of the subgrade material removed and replaced, proof rolling of secondary grade, delivering, placing, mixing, and compacting these materials, all labor, equipment, tools, and incidentals necessary to complete this item, including curing. Stabilized subgrade found deficient in thickness shall be removed and replaced, or at the option of the **OWNER**, the pavement structural section shall be adjusted to compensate for any deficiency in the stabilized subgrade thickness and strength at the **CONTRACTOR**'s expense as noted in section 3.8.

- END OF SECTION -

SECTION 02450-S – SLURRY SEAL

TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS

SLURRY SEAL

- 1.0 SCOPE OF WORK
- 2.0 CITY DESIGN CONSTRUCTION STANDARDS AND SPECIFICATIONS
- 3.0 MATERIALS
- 4.0 CONSTRUCTION REQUIREMENTS AND EXECUTION OF WORK
- 5.0 SPECIAL CONDITIONS
- 6.0 METHOD OF MEASUREMENT AND PAYMENT

1.0 SCOPE OF WORK

The work shall consist of, but not be limited to, application of a slurry seal at various locations.

2.0 CITY DESIGN AND CONSTRUCTION STANDARDS AND SPECIFICATIONS

Any materials required for this project shall be pursuant to the requirements of the City of Louisville, Colorado "Design Construction Standards and Specifications", and the Colorado Department of Transportation Standard Specifications for Road and Bridge Construction, latest revision, thereto except as modified by these plans and/or specifications.

3.0 MATERIALS

DESCRIPTION

The Contractor shall furnish all labor, equipment, material, supplies, signage, traffic control, and other incidentals necessary to provide a Slurry Seal. Slurry Seal shall consist of a mixture of an approved emulsified asphalt, mineral aggregate, water, and specified additives, proportioned, mixed and uniformly spread over a properly prepared asphalt surface. The completed Slurry Seal shall leave a homogeneous mat, adhere firmly to the prepared surface, and have a skid-resistant surface texture throughout its service life.

Emulsified Asphalt Material – The liquid emulsion shall be water-based emulsified asphalt comprised of straight-run vacuum tower bottoms, synthetic SBR latex polymer, and emulsification agents. The SBR polymer shall be co-milled during the emulsification process such that a bicontinuous polymer-asphalt network is formed upon curing of the finished emulsion. The emulsion shall be pumpable and suitable for use in a Slurry Seal machine.

The emulsified asphalt shall conform to the requirements of the ASTM specification for quick set CQS with revisions as indicated in the table below. In addition, the emulsion shall contain 3% minimum SBR latex solids based on weight of asphalt cement. The slurry seal mixture shall contain an emulsion content of 10 – 20% by weight of dry aggregate which shall be determined in the laboratory by an approved mix design process. The residual asphalt content shall be 5 – 15% based on weight of dry aggregate.

Tests on CQS Emulsion	Minimum	Maximum	Test Method
Viscosity, Sybolt Furoi, 25 deg C, see, (a)	20	100	ASTM <u>D 244</u>
Particle Charge Test	Positive		ASTM D 244
Sieve Test, % (a)		0.1	ASTM D 6933
Distillation: (b)			AASHTO T 59
Residue, %			AASHTO T 59
Polymer:			
Polymer Solids Based on Weight of Asphalt, %			Supplier Cert.
Polymer Type:			Supplier Cert.
Test on Residue (b)			AASHTO T 59
Penetration, 25 deg C, 100g, 5s	40		ASTM D 5

Ductility, 25 deg C, 5 cm/min, cm	40		ASTM D 113
Solubility in Trichloroethylene, %	97.5		ASTM D 2042
Elastic Recover, 77 deg F, 10 cm, 1 h, %	40		ASTM D 5976

The specification for Slurry Emulsion is in accordance with the material properties and test methods as specified by ISSA, ASTM, and AASHTO.

(a) This test requirement on representative samples is waived if successful application of the material has been achieved in the field.

(b) Residue by evaporation is intended to provide rapid determination of the percent residue and to provide material for tests on residue. If the percent residue or any test on the residue fails to meet specifications, the tests will be repeated using the distillation test specified by AASHTO T59. For polymer modified emulsions, the distillation and evaporation tests will be modified to include 400F maximum temperature to be held for 15 minutes.

(c) If the solubility of the residue is less than 97.5%, the base asphalt binder for the emulsion shall be tested. The solubility of the base asphalt binder shall be greater than 99 percent.

AGGREGATE - The aggregate shall consist of manufactured granite crusher fines. The smooth textured crusher fines shall have less than 1.25% water absorption. The aggregate shall be gray in color with 100% fractured faces, clean and free from organic matter or other deleterious substances and clay balls. Oversized granular material and/or presence of clay balls will require the project to be stopped and shall meet the following requirements:

Gradation Table – Aggregate (percent passing) (a) (b)

Sieve Size	Type II	Type III	Tolerance
3/8"	100	100	+ or – 5%
No. 4	90-100	70-90	+ or – 5%
No. 8	65-90	45-70	+ or – 5%
No. 16	45-70	28-50	+ or – 5%
No. 30	30-50	19-34	+ or – 5%
No. 50	18-30	12-25	+ or – 4%
No. 100	10-21	7-18	+ or – 3%
No. 200	5-15	5-15	+ or – 2%

(a) Meets ISSA gradation.

(b) If oversize material is present, screening through a ¼" screen will be required prior to delivery to the slurry machine. If clay balls are present, the aggregate may not be used.

- Resistance to Degradation (ASTM C131grading D) 20% maximum loss
- Soundness of Aggregate (ASTM C88) 15% maximum loss
- Sand Equivalent (ASTM D 2419) 55% maximum
- LA Abrasion (AASHTO T96) 20% maximum loss

Mineral Filler: Hydrated lime, limestone dust, or other approved filler meeting the requirements of ASTM D242 shall be used if required by the mix design. They shall be considered as part of the dry aggregate.

Water: All water used shall be potable and free of dissolved materials which may affect the mix characteristics or finished characteristics of the product. Additives:

Additives may be used to accelerate or retard the break-set of the Slurry Seal or to improve the resulting finished surface. The use of additives in the Slurry mix (or individual materials) shall be made initially in quantities predetermined by the mix design with field adjustments, if required, after approval by the Project Manager.

Slurry Seal Mix Design Specifications: Before work begins, the Contractor shall submit a mix design covering the specific materials to be used on the project. The mix design shall identify the job mix formula and present test results for the required specifications verifying the compatibility of the aggregate and the modified CQS-1HL. The mix design shall follow the standards and guidelines as set forth by ISSA. The Slurry mixture shall meet the following specifications:

ISSA TEST NO.	DESCRIPTION	SPECIFICATION
ISSA TB-100	Wet-Track Abrasion Loss, six (6) day Soak	75 g/ft ² (807 g/m ²)
ISSA TB-109	Sand Adhesion by wheel tester	50 g/ft ² Maximum
ISSA TB-105	Asphalt Content (based on dry aggregate)	5 – 15%
Trial Mix Characteristics		
ISSA TEST NO.	DESCRIPTION	SPECIFICATION
ISSA TB-113/3.5	Mix Characteristics	No excess free liquids in mix No excessively dry or stiff mix
ISSA TB-113/3.6	Mix Time at 77°F	180 seconds minimum
ISSA TB-113/3.6	Mix Time at 100°F	120 seconds minimum
ISSA TB-113/3.7	Set Time at 77°F Displacement	30 minutes maximum
ISSA TB-113/3.8	Clear blot	30 minutes maximum
Cured Trail Mix Evaluation (24 hr-77 deg F cured mix from ISSA T113/3.6 – 30 second mix)		
ISSA T113/4.1	Surface Examination	No tackiness No shininess
ISSA T113/4.2	Fines Flotation	No fines flotation
ISSA T113/4.3	Internal Adhesion	95% minimum coating, all size particles securely held in mix, no asphalt/aggregate segregation
Wet Stripping Test - modified to a 10 minute boiling period (24hr 77°F cured mix from ISSA T113/3.6 - 30 second mix)		
ISSA T114	Coated aggregate integrity	95% minimum coating report solid, broken, crumbly, etc.
ISSA T139	Cohesion Value at 77 deg F	30 min 12 kg-cm min 60 min report 2 hr report 4hr report 24hr solid spin (26 in-lb)

Composition of mixture: The owner shall approve the design mix and all Slurry Seal materials and methods prior to use and shall designate the proportions to be used within the following limits:

Residual Asphalt: 5% – 15% by dry weight of aggregate.

Emulsion Content: 10% - 20% by dry weight if aggregate.

Mineral Filler: 0.5% to 2% by dry weight of aggregate.
Polymer Content: 1%, 3% minimum based on weight of asphalt cement.
Water (Potable): As required to provide proper consistency.
Application Rate (average): 16-20 lbs. per square yard (Type II)
18-22 lbs. per square yard (Type III)

4.0 CONSTRUCTION REQUIREMENTS

Equipment: The size and condition of all equipment shall be approved prior to construction. Should equipment be unsatisfactory for whatever cause, the Contractor shall remove and replace the equipment without delay or cost. The equipment shall conform to the following minimum requirements.

The material shall be mixed by either a truck mounted or self propelled microsurfacing mixing machine. The machine shall employ continuous flow mixing and be able to accurately deliver and proportion the aggregate, emulsified asphalt, mineral filler and water to a revolving multi-blade mixer and discharge the mixed product on a continuous flow basis. The machine shall have sufficient storage capacity for aggregate, emulsified asphalt, mineral filler and water to maintain an adequate supply to the proportioning controls.

Individual volume or weight controls for proportioning each material to be added to the mix shall be provided. Each material control device shall be calibrated and properly marked. The aggregate feed to the mixer shall be equipped with a revolution counter or similar device so the amount of aggregate used may be determined at any time. The emulsion pump shall be a heated positive displacement type and shall be equipped with a revolution counter or similar device so that the amount of emulsion used may be determined at any time.

The mixing machine shall be equipped with a water pressure system and nozzle type spray bar to provide a water spray immediately ahead of and outside the spreader box. The mixing machine shall be equipped with an approved fines feeder that shall provide a uniform, positive, accurately metered, predetermined amount of the specified mineral filler.

Spreading Equipment: The paving mixture shall be spread uniformly by means of a mechanical type squeegee box attached to the mixer, equipped with paddles and/or augers to agitate and spread the materials throughout the box. A front seal shall be provided to insure no loss of the mixture at the road contact surface. The rear seal shall act as final strike off and shall be adjustable. The mixture shall be spread to fill cracks and minor surface irregularities and leave a uniform skid resistant application of aggregate and asphalt on the surface. The spreader box and rear strike-off shall be so designed and operated that a uniform consistency is achieved to produce a free flow of material to the rear strike-off. No "burlap" will be permitted to be drug behind the squeegee box except along the seams where a 2' to 3' wide burlap "blanket" will be permitted to be drug to the extent necessary to achieve an acceptable finish at the seams as determined by the owner. Rut filling equipment will require adjustable steel strike-off plates. The seam where two spreads join shall be neat appearing and uniform. All excess material shall be removed from ends of each job site immediately.

Calibration: Each mixing unit to be used during performance of the work shall be calibrated in the presence of the Project Manager prior to construction. Previous calibration documentation covering the exact materials to be used may be acceptable, provided they were made during the same calendar year.

The documentation shall include an individual calibration of each material at various settings, which can be related to each machine's metering devices. No machine will be allowed to work on the project until all calibrations have been completed and/or accepted by the Project Manager.

EXECUTION OF THE WORK

Lines: Care shall be taken to insure straight lines along curbs and shoulders. No runoff on these areas will be permitted. Lines at intersections shall be kept straight to provide a good appearance.

Handwork: Approved hand squeegees, with burlap drags, shall be used to spread Slurry in areas not accessible to the Slurry spreader box. Care shall be exercised in leaving no unsightly appearance from handwork.

Curing: Areas receiving Slurry Seal will be allowed to cure from three to five hours or until the treated pavement will not be damaged by traffic. The Contractor will protect the area with suitable barricades or markers for the full curing period. Areas damaged within 24 hours of application of Slurry, or prior to moving to new work locations, shall be repaired by the Contractor at their expense.

Surface Preparation: Immediately prior to applying the Slurry Seal, the surface shall be cleared of all loose material, oil spots, vegetation and other objectionable material. Any standard cleaning method will be acceptable. If water is used, cracks shall be allowed to dry thoroughly before Slurry surfacing. Manholes, valve boxes, drop inlets and other service entrances shall be protected from the Slurry Seal by a suitable method. The Project Manager shall approve the surface preparation prior to surfacing.

Weather Limitations:

No construction shall take place when either the ambient or pavement surface temperature fall below 50 deg F (10 deg C), or when the pavement is moist, or when the weather is or may be detrimental. Detrimental weather is defined as rain showers, cool temperatures, moist pavements, threat of rain showers, or other environmental factors which could affect the performance of the slurry seal construction.

Traffic Control: A Traffic Control Plan approved by Project Manager will be required before any work commences. Temporary Raised Pavement Markers will be installed as needed, at a minimum of 40' spacing.

5.0 SPECIAL CONDITIONS

MANHOLES AND VALVE BOXES

Manholes and valve boxes shall be covered with an approved material during the operation and shall be removed immediately after the street has been slurry sealed. The Contractor is responsible for locating all exposed manholes and valve boxes prior to slurry sealing.

WEATHER LIMITATIONS

No construction shall take place when either the air or pavement surface temperature fall below fifty degrees or when the pavement is moist, or when the weather is or may be detrimental. Detrimental weather is defined as rain showers, cool temperatures, moist pavements, threat of rain showers, or other factors which could affect the performance of the construction

PUBLIC NOTIFICATION

The Contractor shall distribute an approved information flyer to all residents adjacent to the project at least two weeks prior to the anticipated start of construction. The information flyer shall include the Contractor's name, office phone number, a manned 24/7 local telephone number and tentative construction schedule. Contractor shall also coordinate with Owner to establish a construction call line that includes 72 hour scheduling information updated daily. The cost of public notification indicated herein shall be included in the unit price of the slurry seal.

6.0 METHOD OF MEASUREMENT AND PAYMENT

1. Scope of Work

Work shall consist of furnishing all labor, materials, equipment, haul, asphalt emulsion, and all other pavement work necessary to install SLURRY SEAL to the limits and depths on the plans and as directed by the Engineer.

2. Method of Measurement and Payment

The accepted quantities of SLURRY SEAL will be paid for at the contract unit price per square yard installed and field measured, and shall be full compensation for all work necessary to complete the item.

- END OF SECTION -

SECTION 02500 - ASPHALT

TECHNICAL SPECIFICATIONS

- 1.0 SCOPE OF WORK
- 2.0 CITY DESIGN CONSTRUCTION STANDARDS AND SPECIFICATIONS
- 3.0 PRELIMINARY WORK
- 4.0 ASPHALT CEMENT CONCRETE PAVEMENT
- 5.0 SPECIAL CONDITIONS
- 6.0 BASIS OF PAYMENT

1.0 SCOPE OF WORK

The scope of work shall consist of, but not be limited to, asphalt patching, milling, demolition, asphalt leveling, asphalt paving, signage, pavement marking, and traffic control, including all work appurtenant thereto, on various streets within the City of Louisville.

2.0 CITY DESIGN AND CONSTRUCTION STANDARDS AND SPECIFICATIONS

Any and all materials required for this project shall be pursuant to the requirements of the City of Louisville, Colorado "Design and Construction Standards", adopted February 15, 1994, and the latest revisions thereto except as modified by these plans and/or specifications.

3.0 PRELIMINARY WORK

REMOVAL OF PAVEMENTS, SIDEWALKS, CURBS, ETC.

Concrete or asphalt that is to remain shall be in a straight and true line with a vertical face. Concrete or asphalt shall be cut with a cutting wheel, jackhammer, saw, or broken to the directed point of removal.

CONTRACTOR shall be responsible for replacement of all overbreak. CONTRACTOR shall maintain a straight, true break line. The sawing shall be done carefully, and all damages to concrete or asphalt to remain in place, due to CONTRACTOR's operation, shall be repaired by CONTRACTOR. The minimum depth of saw cut in concrete shall be 2 inches.

DISPOSAL

Unusable materials and surplus excavated materials shall be properly disposed of offsite by CONTRACTOR. All private and public property occupied by CONTRACTOR in connection with the work and construction shall be cleared of all rubbish, debris, and excess materials. All parts of the construction site shall be left in a condition acceptable to ENGINEER. CONTRACTOR shall make all necessary arrangements for obtaining suitable disposal locations.

BACKFILL

Except in areas to be excavated, all cavities left by structure removal shall be backfilled with suitable material and compacted in accordance with applicable sections in the Design and Construction Standards. Jetting or puddling will not be allowed.

TOLERANCES

Where bituminous surfacing materials are to be placed directly on the subgrade, the subgrade plane shall not vary more than 0.04 ft. Excavation operations shall be conducted so that material outside of the limits of slopes will not be disturbed.

PREPARATION OF SUBGRADE

All subgrade preparation shall conform to the standards and requirements herein. Work in this section shall pertain to the preparation of natural, excavated, or embankment subgrade areas prior to the placement of road base material, pavement, curb and gutter, driveways, sidewalks, or structures.

CONSTRUCTION OF EMBANKMENT AND TREATMENT OF CUT AREAS WITH MOISTURE AND DENSITY CONTROL

The plans will show the areas in which embankments are to be constructed with moisture and density control, and the distance below subgrade to which such methods shall be applied.

Within the areas indicated on the plans and to the designated depth below subgrade, for the full width of roadbed in all cut sections, earth shall be thoroughly scarified, and the moisture content increased or reduced, as necessary, to bring the moisture to the content specified. This scarified layer shall then be compacted to the degree of compaction specified.

Maximum dry density of all soil types encountered or to be used will be determined in accordance with AASHTO T99, or AASHTO T180. The amount of water to be used in compacting all materials shall not deviate from optimum on the dry side by more than two percentage points as determined by AASHTO T99 or T180.

The percent of compaction specified shall be equal to or greater than minimum values as shown in the following table for the various classes of soil and type of compaction.

Soil Classification (AASHTO M145)	AASHTO T99 Minimum Relative (Percent)	AASHTO T180 Minimum Relative (Percent)
A-1 through A-5		95
All Others	95	

PREPARATION OF SUBGRADE

All subgrade preparation shall conform to the standards and requirements herein. Work in this section shall pertain to the preparation of natural, excavated, or embankment subgrade areas prior to the placement of road base material, pavement, curb and gutter, driveways, sidewalks, or structures.

SUBGRADE SCARIFICATION, BLENDING, AND COMPACTION

Subgrade preparation in both excavation and embankment areas shall consist of scarifying, blending, mixing, blading, shaping, and compacting the subgrade with moisture and density control. A minimum of the top 8 to 12-inches of the entire width of the roadway subgrade shall be thoroughly prepared as mentioned above unless otherwise specified, the moisture content adjusted as necessary to meet density requirements.

The scarified layers shall then be compacted with the appropriate labor and equipment to the compaction specified. Compaction test results on utility trenches must be on file with the City prior to placing any layer of roadbase or pavement section on the subgrade. Compaction tests shall be taken by

a geotechnical engineer on the subgrade. Compaction test results on the subgrade shall be submitted to ENGINEER within 24 hours after the tests have been taken for review and approval.

Formal compaction test reports shall be submitted as soon as possible during applicable construction phases. The geotechnical engineer shall take a sufficient number of compaction tests to assure himself that the street subgrade is ready for roadbase or paving and shall so certify on his compaction report. Formal compaction reports shall be signed and sealed by a registered Professional Engineer.

Compaction tests shall include but not be limited to trenches for water main, sanitary sewer main, storm sewer main, water service trenches, sanitary sewer service trenches, gas mains and service trenches, electric trenches and services, sleeve or conduit trenches, around manholes, water valve boxes, inlets, and under curb, gutter, and sidewalk. If the subgrade does not have the specified density and moisture content prior to placing roadbase or pavement, the geotechnical engineer shall require scarifying, wetting, rerolling, and retesting.

If more than 24 hours has elapsed between the time compaction tests are taken and the time the next layer in the pavement sections is placed, the area shall be retested.

SUBGRADE TOLERANCES

After scarifying and compaction has been completed, the subgrade surface shall not vary above or below the lines and grades as staked by more than 0.08 foot, if roadbase is to be installed. Where asphalt pavement is to be installed directly on the subgrade, the subgrade plane shall not vary more than 0.04 foot.

Prior to installation of hot asphalt pavement, ENGINEER to confirm and approve line and grade of subgrade.

Bluetop stakes are required to set street centerline grade and verify tolerances.

PROOF ROLLING SUBGRADE

Proof rolling will be required on the subgrade and aggregate base course surfaces. Proof rolling shall be completed after specified compaction has been obtained. Areas found to be weak and those areas which failed shall be reworked or repaired or other measures taken to correct subgrade problems per the recommendations of the geotechnical engineer and approval of ENGINEER.

Satisfactory results of the proof roll do not relieve CONTRACTOR of his responsibility to provide suitable subgrade, and aggregate base course surfaces for roadway construction activities. Subgrade and aggregate base course failures that occur prior to paving activities, such as soft or yielding areas (as designated by ENGINEER) will be removed and either reworked or replaced.

Proof rolling shall be performed by the City. A 24-hour notification is required for scheduling a proof roll. Proof rolling on streets requiring subgrade cement treatment shall occur prior to and after the application of subgrade cement.

4.0 ASPHALT CEMENT CONCRETE PAVEMENT

1. DESIGN INTENT

These specifications include general requirements applicable to all types of plant mix, asphalt cement concrete pavements (ACCP). This work consists of one or more courses of asphalt mixture constructed on a prepared foundation in accordance with specifications. The design intent is to provide pavement with adequate thickness and quality to provide a serviceable life of 20 years. It is also the intent to provide construction in accordance with these specifications and with a high standard of practice. This item shall include all labor, equipment, materials to manufacture, place, and compact asphalt cement concrete for pavement purposes.

2. MATERIALS

The asphalt plant mix shall be composed of a mixture of aggregate, filler, hydrated lime, asphalt cement, polymer, and reclaimed asphalt pavement (RAP).

- 2.1 Aggregate – Aggregates for ACCP shall be of uniform quality, composed of clean, hard, durable particles of crushed stone, crushed gravel, or crushed slag. Excess of fine material shall be wasted before crushing. The material shall not contain clay balls, vegetable matter, or other deleterious substances and shall meet the following requirements.

TABLE 2.1.1 - AGGREGATE PROPERTIES

Aggregate Test Property	Course: Retained on #4	Fine: Passing the #4
Fine Aggregate Angularity, ASTM C1252 Method A		
Traffic Level 1 & 2	--	42% Min.
Traffic Level 3 to 5	--	45% Min.
Two Fractured Faces, CP 45		
Top and Middle Lifts	80% Min.	--
Bottom Lifts	70% Min.	--
LA Abrasion, AASHTO T96	45% Max.	--
Flat and Elongated (Ratio 3:1) %, AASHTO M283	10% Max.	--
Adherent Coating (Dry Sieving) ASTM D5711	0.5% Max.	--
Sand Equivalent, AASHTO 176	--	45% Min.

Reclaimed Asphalt Pavement material (RAP) shall be used only where specifically allowed as shown on the plans and shall be of uniform quality and gradation with a maximum size no greater than the nominal aggregate size of the mix. Mixes shall not contain more than 20 percent RAP. **RAP is not permitted in Asphalt Top Lifts and Overlays, unless otherwise approved by ENGINEER.**

The ACCP gradation shall be wholly within the control point gradation range set forth in the following table. The gradation of the design job mix shall report all sieve sizes listed in the table.

TABLE 2.1.2 - GRADATION RANGE
(Percent by Weight Passing Square Mesh Sieves, AASHTO T11 & T27)

Sieve Size	SX*		S*		SG*	
	Control Points	Restricted Zone	Control Points	Restricted Zone	Control Points	Restricted Zone
1 1/2"	--	--	--	--	100	--
1"	--	--	100	--	90-100	--
3/4"	100	--	90-100	--	--	--
1/2"	90-100	--	--	--	--	--
3/8"	--	--	--	--	--	--
#4	--	--	--	--	--	39.5
#8	25-58	39.1	23-49	34.6	19-45	26.8-30.8
#16	--	25.6-31.6	--	23.3-28.3	--	18.1-24.1
#30	--	19.1-23.1	--	16.7-20.7	--	13.6-17.6
#50	--	15.5	--	13.7	--	11.4
#200**	2.0-7.0	--	2.0-7.0	--	1.0-7.0	--

* The gradation should pass above the restricted zone boundaries, on the "fine" side.

** These limits shall include the weight of lime at 1.0%

VMA shall be based on tests of the Bulk Specific Gravity of the Compacted Mix (CP-L 5103) and Aggregate (T84 & T85), and calculated according to CP-48. All mixes shall meet the minimum VMA specified in the table below.

TABLE 2.1.3 - MINIMUM VMA, %

Nominal Maximum* Particle Size	Air Voids	
	4%	5%
1 1/2"	12	13.0
1"	13.0	14.0
3/4"	14.0	15.0
1/2"	15.0	16.0

* Nominal Maximum Particle Size is defined as one sieve size larger than the first sieve to retain more than 10% but shall not exceed the 100% passing size.

Maximum Particle Size can vary during mix production even when the 100% passing size is constant.

Minimum VMA criteria applies to both design and plant produced mix. The VMA minimum shall be interpolated based on actual air voids.

2.2 Asphalt Cement

CONTRACTOR shall provide to OWNER compete laboratory test results of supplied asphalt cement along with "Certifications of Compliance". A minimum of three working days shall be allowed for this review

prior to mixture design. Upon non-conformance with the specifications the asphalt cement may be rejected as directed by OWNER.

Asphalt Cement binder shall meet the requirements of the Superpave Performance-Graded Binders (PG) as presented in Table 2.2.1 below:

TABLE 2.2.1 – PROPERTIES OF SUPERPAVE PERFORMANCE GRADED BINDERS

Property	PG 58-28	PG 64-22	PG 76-28
Traffic Level	1 or 2	1 or 2	3 to 5
Flash Point Temperature, °C, AASHTO T48	230 Min.	230 Min.	230 Min.
Viscosity at 135° C, Pas, ASTM D4402	3 Max.	3 Max.	3 Max.
Dynamic Shear, Temperature °C, where $C^*/\sin \delta @ 10\text{rad/sec.} \geq 1.00 \text{ Kpa}$, AASHTO TP5	58	64	76
Rolling Thin Film Oven Residue Properties, AASHTO T 240			
Mass Loss, %, AASHTO T240	1.00 Max.	1.00 Max.	1.00 Max.
Dynamic Shear, Temperature °C Where $G^*/\sin \delta @ 10 \text{ rad/sec.} \geq 2.20 \text{ Kpa}$, AASHTO TP5	58	64	76
Elastic Recovery, 25° C, % Min.*	N/A	N/A	50 Min.
Pressure Aging Vessel Residue Properties, Aging Temperature 100° C AASHTO PP1			
Dynamic Shear, Temperature °C Where $G^*/\sin \delta @ 10 \text{ rad/sec.} \leq 5,000 \text{ Kpa}$, AASHTO TP5	19	25	28
Creep Stiffness, @ 60 Sec. Test Temperature in °C, AASHTO TP1	-18	-12	-18
S, Mpa, AASHTO TP1	300 Min.	300 Min.	300 Min.
m-value, AASHTO TP1	0.300 Max.	0.300 Max.	0.300 Max.
Direct Tension Temperature in °C, @ 1.0 mm/min., where Failure Strain > 1.0%, AASHTO TP3	-18	-12	-18

* Elastic Recovery by Task Force 31, Appendix B Method

Asphalt Cement binder shall be as described on the drawings and specified on MGPEC, Form #9 Mixture Design Requirements for Hot Mix Asphalt Pavements (HMAP).

2.3 Additives

Lime shall be added at the rate of 1% by dry weight of the aggregate and shall be included in the amount of material passing the No. 200 sieve. Hydrated lime for aggregate pretreatment shall conform to the requirements of ASTM C 207, Type N. In addition, the residue retained on a 200-mesh sieve shall not exceed 10% when determined in accordance with ASTM C110. (Drying of the residue in an atmosphere free from carbon dioxide will not be required.)

2.4 Tack Coat

An emulsified asphalt tack coat shall be applied to existing surfaces as shown on the plans. The emulsified asphalt shall be CSS-1 h or SS-1 h and conform to AASHTO M208 or MI40, respectively.

Contractor shall exercise care in tracking tack coat onto concrete surfaces, including sidewalks, ramps, gutters, and crosspans. It is the Contractor's responsibility to remove and clean all tack coat from concrete surfaces at the completion of each phase. Failure to clean the tack coat could result in a stop work order.

3. **MIX DESIGN AND PLANT PRODUCED MIXTURE REQUIREMENTS**

The mixture shall be designed to produce an acceptable mixture at an optimum air void content of 4.0 percent (96.0 percent density) in the total mix. The mix design shall be performed using the materials listed in Section 9.3 and used in the field. No substitutions are allowed.

Level of compaction for local and collector streets is N=75, level of compaction for arterial streets is N=100.

3.1 Marshall Mixture Design Method

CONTRACTOR shall submit a proposed design job mix for each mixture required by the Contract. The design AC content shall be determined using the Marshall Method of Mixture Design as described in "Mix Design Methods for Asphalt Concrete" Manual Series 2 (MS-2) published by the Asphalt Institute. Grading SG (1-inch nominal aggregate) shall not be designed using the Marshall method. Mix design shall meet the following:

TABLE 3.1 – MARSHALL MIXTURE PROPERTIES

Traffic Level	I	II
Traffic Loading 18 kip ESALs Over 20 years	<300,000	300,000 to 1,000,000
Property	Specification	
Compaction Number of Blow, Each End	50	70
Stability, lb	1,800 Min.	2,000 Min.
Flow, 0.01 in.	8-18	8-16
Air Voids, %	4.0-5.0	4.0-5.0
Voids Filled with Asphalt, % MS-2	70-80	65-78
Tensile Strength Ratio, % Retained CP-L 5190	80 Min.	80 Min.
Dry Tensile Strength, psi CP-L 5109	30 Min.	30 Min.
VMA %, CP 48	Table 2.1.3	Table 2.1.3

3.2 Superpave Mixture Design

CONTRACTOR shall submit a design job mix for each mixture required by the Contract. The design shall be determined using Colorado Procedure CP-L 5115 for the Superpave Method of Mixture Design. Other guidance is provided in "Superpave Level 1 Mix Design "SP-2 published by the Asphalt Institute. Mix designs shall meet the following:

TABLE 3.2 – SUPERPAVE MIXTURE PROPERTIES

Traffic Level	1	2	3	4	5
Traffic Loading, Total 18 kip ESALs Over Design Life (Usually 20 Years)	<300,000	300,000 to 1.0 Million	1.0-3.0 Million	3.0-10.0 Million	>10.0 Million
Initial (Air Void > 11.0%)	7	7	7	8	8
Design (Air Void 4.0 to 5.0%)	68	76	86	96	109
Max (Air Void > 2.0%)	104	117	134	152	174
Hveem Stability (100 mm Plugs)	35	39	39	42	42
Voids Filled with Asphalt, % MS-2	70-80	65-78	65-78	65-75	65-75
Tensile Strength Ratio, % Retained	80 Min.	80 Min.	80 Min.	80 Min.	80 Min.
Dry Tensile Strength, Min. psi	30 Min.	30 Min.	30 Min.	30 Min.	30 Min.
VMA %, CP 48	Table 2.1.3				

4. MIXTURE DESIGN SUBMITTALS

CONTRACTOR shall submit all mixture designs, certificates, refinery reports, and laboratory data to OWNER for approval at least 7 days before construction is to begin. The job mix formula may be rejected as directed by OWNER on the basis of incompleteness, timeliness, or changes in materials. Submittals shall be in a timely fashion such that rejection will not delay completion of the project.

Mixture designs shall be performed in a materials laboratory under the direct supervision of and shall be stamped and signed by a Professional Engineer licensed in Colorado and practicing in this field. In addition, CONTRACTOR shall submit as part of the mixture design, document to verify the following:

1. Source of materials
2. Gradation, specific gravity, source, and description of individual aggregates and the final blend
3. Aggregate physical properties
4. Asphalt cement properties
5. Design Job Mix
6. Mixing and compaction temperatures used
7. Mixture properties determined at a minimum of four asphalt contents and interpolated at optimum and graphs showing mixture properties versus asphalt content

OWNER reserves the right to test CONTRACTOR's mix for each hot asphalt pavement grading utilizing materials actually produced and stockpiled. CONTRACTOR shall provide a sufficient quantity of each aggregate, mineral filler, RAP, and additive for the required laboratory tests, if required by OWNER.

Should a change in the source of Asphalt Cement (AC) or Lime occur, a one point verification 34 test (at optimum asphalt content) of the mix must be performed to verify that the applicable Table 2.1.3, 3.1, and 3.2 criteria is still met. If this testing shows noncompliance, a new design job mix shall be established before the new AC or Lime source is used.

Prior to the start of the project, a sample shall be submitted to an independent laboratory to verify the volumetric properties of the mix. If the mix has been produced for another project within the last month, data from that project can be submitted for verification if testing was performed by an

independent laboratory. If volumetric properties are not within the following tolerances, the mixture shall be redesigned and retested.

Air Voids	1.0%
VMA	1.0%
Asphalt Content	0.3%

5. EQUIPMENT

5.1 Mixing Plant

The mixing plant shall be capable of producing a uniform material, have adequate capacity, and be maintained in good mechanical condition. Defective parts shall be replaced or repaired immediately if they adversely affect the proper functioning of the plant or plant units, or adversely affect the quality of the hot bituminous plant mix.

Dust, smoke, or other contaminants shall be controlled at the plant site to meet all air quality requirements in the "Colorado Air Quality Control Act," Title 25, Article 7, CRS and regulations promulgated thereunder.

Acceptable safety equipment, approved by OWNER, shall be provided by CONTRACTOR to accommodate sampling and testing.

CONTRACTOR shall provide OWNER with results from CONTRACTOR's quality control testing at the plant and in the field during paving operations.

5.2 Hauling Equipment

Trucks used for hauling ACCP shall have tight, clean, smooth metal beds thinly coated with a minimum amount of paraffin oil, lime solution, or other approved release agent. **Petroleum distillates such as kerosene, diesel or fuel oil are not approved release agents.** Each truck shall have and use a cover of canvas or other suitable material to protect the mixture from the weather and excessive temperature loss or cooled layers of mix in truck.

Asphalt haul trucks delivering material for leveler courses, overlay, and top lift operations shall not be allowed to "clean out" in the paving area. CONTRACTOR shall provide, maintain, and clean an area for haul truck "clean out". The location of the "clean out" area shall be approved by ENGINEER.

Haul trucks shall exercise care when tracking over tack. It is the Contractor's responsibility to remove and clean all tack coat from concrete surfaces at the completion of each phase. Failure to clean the tack coat could result in a stop work order.

5.3 Bituminous Pavers

Self-propelled pavers shall be provided and equipped with an activated screed assembly, heated, if necessary, capable of spreading and finishing the bituminous plant mix material in full lane widths applicable to the typical section and thicknesses shown in the Contract. Pavers used for shoulders and

similar construction shall be capable of spreading and finishing courses of asphalt plant mix material in widths shown in the Contract.

The paver's receiving hopper shall have sufficient capacity for a uniform spreading operation and shall have an automatic distribution system that will place the mixture uniformly in front of the screed.

The paver shall be capable of operating at forward speeds consistent with uniform and continuous laying of the mixture. Stop and go operations of the paver shall be avoided.

The screed or strike-off assembly shall produce the specified finished surface without tearing, shoving, or gouging the mixture. Pavers shall be equipped with automatic screed controls with sensors capable of sensing grade from an outside reference line and maintaining the screed at the specified longitudinal grade and transverse slope. The sensor shall be constructed to operate from either or both sides of the paver and shall be capable of working with the following devices:

- (1) Ski-type device at least 30 feet in length.
- (2) Short ski or short shoe.
- (3) At least 5,000 feet of control line and stakes.

Device 2 shall not be used on the surface course when the length to be paved is greater than 600 feet.

The controls shall be capable of maintaining the screed at the specified transverse slope within plus or minus 0.1 percent. Automatic mode should be used where possible. If the automatic controls fail or malfunction the equipment may be operated manually for the remainder of the normal working day, provided specified results are obtained. If CONTRACTOR fails to obtain and maintain the specified surface tolerances, the paving operations shall be suspended until satisfactory corrections, repairs, or equipment replacements are made.

Placement of ACCP on a waterproofed bridge deck shall be accomplished with equipment that will not damage the membrane or protective covering.

6. MANUFACTURE

6.1 Preparation of Aggregates

Heating and drying of the aggregates shall be accomplished without damaging the aggregate. Lime shall be added to achieve complete and uniform coating of the aggregate. When hydrated lime is used it shall be added to the aggregate in accordance with one of the following methods:

- a. Lime Slurry Added to Aggregate: The hydrated lime shall be added to the aggregate in the form of a slurry and then thoroughly mixed in an approved pugmill. The slurry shall contain a minimum of 70 percent water by weight.
- b. Dry Lime Added to Wet Aggregate: The dry hydrated lime shall be added to wet aggregate (a minimum of three percent above saturated surface dry) and then thoroughly mixed in an approved pugmill.

The lime-aggregate mixture may be fed directly into the hot plant after mixing or it may be stockpiled for not more than 90 days before introduction into the plant for mixing with the asphalt cement. The hydrated lime may be added to different sized aggregates and stockpiled, by adding 75 percent of the

lime to the aggregate passing the No. 4 sieve and 25 percent to the aggregate retained on the No. 4 sieve.

6.2 Mixing

The dried aggregates and asphalt cement shall be combined in the mixer in the quantities required to meet the design job mix. The materials shall be mixed until the aggregate is completely and uniformly coated, and the asphalt cement is uniformly distributed throughout the aggregate. The output rate shall not exceed the manufacturer's capacity rating.

Baghouse fines shall be fed back to the mixing plant in a uniform and continuous manner so as to maintain uniformity in the mixture. The baghouse, fines feeder, auger, and related equipment, shall be in good working condition and operated in accordance with manufacturer's recommendation. If OWNER determines that non-uniform operation of the equipment is detrimental to the mixture, he may halt all construction until CONTRACTOR takes appropriate action.

The minimum temperature of the mixture when discharged from the mixer shall be as shown in the following table:

TABLE 6.2.1 – MIXTURE DISCHARGE TEMPERATURES

Asphalt Grade	Minimum Mix Discharge Temperature, °F*	Minimum Delivered Mix Temperature °F**
PG 58-28	275° F	235° F
PG 64-22	290° F	235° F
PG 76-28	320° F	280° F

**The maximum mix discharge temperature shall not exceed the minimum discharge temperature by more than 30° F.*

*** Delivered mix temperature shall be measured behind the paver screed.*

ACCP mix shall be produced at the lowest temperature within the specified temperature range that produces a workable mix and provides for uniform coating of aggregates (95 percent minimum in accordance with AASHTO T195), and that allows the required compaction to be achieved.

ACCP mix shall not be stored longer than 9 hours, unless additional protective measures are used and approved. If storing or holding of the mixture causes segregation, excessive heat loss, or adversely affects the quality of the finished product, corrective action shall be taken. Unsuitable mixture shall be disposed of at CONTRACTOR's expense.

When placing hot bituminous mixture over bridge decks covered by waterproofing membrane, the minimum temperature of the mixture when rolling operations begin shall be 250° F. The job mix temperature may be increased up to 300° F to obtain this temperature.

6.3 Hauling

Each truck shall use covers to protect the mix during transport. OWNER can reject mix which is hauled without a cover. Should the mixture show an excess or deficiency of asphalt cement, damage due to burning or overheating, or an improper gradation the mixture shall be rejected.

7. TACK COAT

Prior to placement of ACCP, a tack coat shall be applied. The material shall be in accordance with 2.4. The emulsified asphalt shall be diluted 1:1 with water and applied at 0.10 ± 0.01 gallons per square yard of diluted material. OWNER may direct other application rates to match the age of condition of the surface.

All work shall be done at locations and with the grade and quantities of material designated on the plans. The surface to receive the tack coat shall be dry and cleaned by sweeping or other approved method until dust, debris, and foreign matter are removed. The tack coat shall then be applied uniformly by distributor as specified below. Prior to paving, all water must have evaporated from the tack coat. Contaminated areas shall be cleaned and tack coat shall be reapplied.

It is the Contractor's responsibility to remove and clean all tack coat from concrete surfaces at the completion of each phase. Failure to clean the tack coat could result in a stop work order.

WEATHER LIMITATIONS

Prime coat and tack coat shall not be applied under the following conditions:

1. When the surface is wet.
2. When weather conditions would prevent the proper penetration or curing of the prime or tack coat.
3. When the temperature in the shade is below 55° F.

EQUIPMENT

CONTRACTOR shall provide necessary equipment for heating and uniformly applying bituminous material and blotter material when required.

The distributor and equipment shall be capable of uniformly distributing bituminous material at even temperature and uniform pressure on variable widths of surface up to 15 feet at readily determined and controlled rates from 0.05 to 2.0 gallons per square yard. The allowable variation from any specified rate shall not exceed plus or minus 0.02 gallon per square yard.

Distributor equipment shall include a tachometer, pressure gauges, accurate volume measuring devices or a calibrated tank, and a thermometer for measuring temperatures of tank contents. Distributors shall be equipped with a power unit for the pump and full circulation spray bars adjustable laterally and vertically. The distributor for rejuvenating agent shall conform to the foregoing and shall also be equipped with the following:

1. Heating facilities with controls to reach a temperature of 130° F.
2. Circulating system to maintain proper mixture of the rejuvenating agent.

The use of a pull behind tack pot with wand will not be permitted except for applying tack next to the curb or crosspans.

PREPARATION OF SURFACE

Preparation of the surface to be treated shall include all work necessary to provide a smooth, dry, uniform surface. Work shall include patching, brooming, and shaping to the required grade and section, compaction removal of unstable corrugated areas and removal of all vegetation. The edges of existing pavements, which are to be adjacent to new pavement, shall be cleaned to permit the adhesion of bituminous materials.

APPLICATION OF BITUMINOUS MATERIAL

Bituminous material shall be applied to the width of the section to be coated by means of a pressure distributor in a uniform and continuous spread. When traffic is maintained, not more than 1/2 of the width of the section shall be treated in one application, or sufficient width shall be left to adequately handle traffic. Care shall be taken that the application of bituminous material at the junctions of spreads is not in excess of the specified amount. Excess bituminous material shall be removed or distributed as directed. Skipped areas or deficiencies shall be corrected. Bituminous material shall not be placed on any surface where traffic will be forced to travel upon the freshly applied material.

APPLICATION RATES AND CURING

A cutback-tacked surface shall cure or break. Surfaces tacked with asphalt emulsion shall be free from residual moisture before placing any bituminous surface. Coating sprayed on the exposed surfaces of curbs, walks, or other structures shall be cleaned by CONTRACTOR.

Tack coat shall be applied to the vertical gutter surface and 12" in on the subgrade the entire length of the roadway where bituminous material will be placed directly on a subgrade surface. Tack coat shall be applied prior to placing any bituminous material.

Tack coat shall be applied to the entire surface of the roadway between asphalt lifts at a rate of not more than 0.10 gal. per square yard unless otherwise directed by ENGINEER. Application temperature of bituminous material shall be between 80° F and 130° F.

8. PLACEMENT

Asphalt concrete shall be placed only on approved, properly constructed surfaces that are free from loose material, water, frost, snow or ice. The asphalt concrete mixtures and tack coat shall be placed in accordance with the temperature limitations of Table 8.1 and only when weather conditions permit the pavement to be properly placed and finished as determined by OWNER.

TABLE 8.1 - PLACEMENT AIR AND SURFACE TEMPERATURE LIMITATIONS

Compacted Layer Thickness	Top Layer of Pavement*		Lower Layer	
	PG 58-28 PG 64-22	PG 76-28	PG 58-28 PG 64-22	PG 76-28
2 inches	50° F	65° F	40° F	50° F
>3 inches	50° F	60° F	40° F	40° F

* Air temperature is taken in the shade. Surface temperature is taken on the subgrade or base. OWNER may not waive the above temperature limitations for PG 76-22.

The mixture shall not be placed at a temperature lower than 245° F or 290° F for mixes containing polymer modified asphalt. Mix which is too cold or damaged by weather will be rejected.

The mixture shall be laid upon an approved surface, spread and struck off to obtain the required grade and elevation after compaction. The minimum lift thickness shall be four times the nominal particle size. The mixture shall be placed approximately 25 percent thicker than the existing surrounding mat thickness to account for compaction. Raking will be required at longitudinal and transverse joints. Casting or raking that causes segregation will not be permitted.

On areas where the use of mechanical spreading and finishing equipment is impracticable, the mixture shall be carefully dumped, spread, raked, screeded, and luted by hand tools to the required compacted thickness plus 25 percent. Move or work the ACCP mix with the use of rakes, lutes, or shovels to avoid segregation. Mixtures made with modified asphalt cement requires more rapid completion of handwork areas than for normal mixtures. Hauling and placement sequences shall be coordinated so that the power is in constant motion. Starting and stopping shall not be allowed. A construction joint shall be placed at any time the power stops. Bituminous pavers shall be used to distribute the mixture either over the entire width or over such partial width as may be practicable. Echelon paving will be permitted.

The hopper wings of the paver shall not be folded during paving operations. CONTRACTOR shall remove and dispose of the asphalt from the hopper wings at the end of each day's paving operations.

If an unsatisfactory mix has been placed, it shall be removed, disposed of, and replaced as directed. No compensation will be allowed for rejected material.

9. LONGITUDINAL JOINTS

9.1 Joint Placement

The longitudinal joints in both a new pavement and an overlay pavement layer shall offset the joint in the layer immediately below by 6 inches. The joints in any pavement layer shall not fall in a wheel track. The joints in the top layer of new pavement not built on top of an existing pavement shall be located as follows:

- (1) For two-lane roadways, at the centerline of the pavement and at the outside edge of the travel lanes.
- (2) For roadways of more than two lanes, at the lane lines and at the outside edge of the travel lanes.

9.2 Joint Construction

Where paving operations occur on a multi lane traveled roadway, CONTRACTOR shall arrange his paving operations so that there will be no exposed longitudinal joints between adjacent travel lanes at the end of a day's run for bottom lifts, asphalt overlays, top lifts, including asphalt leveler courses. Asphalt overlays and top lifts shall not be applied when weather conditions or the threat of rain may prevent completion of the full width asphalt mat.

The new compacted mat shall overlap the previously placed mat no more than 1½ inches. The new uncompacted mat should be placed approximately 25 percent thicker than the existing cold side. Excess

overlap or thickness shall not be raked or cast onto the new mat but shall be wasted by pulling back and removing. The hot edge shall be raked, blocked, or bumped in a smooth line consistent with the previous longitudinal edge. The longitudinal joint shall be rolled from the hot side and overlap the joint by approximately 6 inches on the cold side.

The longitudinal joints shall be compacted to a target density of 92 percent of the maximum specific gravity. The tolerance shall be ± 4 percent. Maximum specific gravity will be that shown for the asphalt mix used in construction of the joint. Density (percent relative compaction) will be determined in accordance with Colorado (CDOT) Procedure 44.

CONTRACTOR shall obtain one 7-inch diameter core at a random location within each longitudinal joint sampling section for determination of the joint density. CONTRACTOR shall drill the cores at the location directed by ENGINEER and in the presence of ENGINEER. ENGINEER will take possession of the cores for testing. CONTRACTOR may take additional cores at the expense of CONTRACTOR. Coring locations shall be centered on the line where the joint between the two adjacent lifts abut at the surface. Core holes shall be repaired by CONTRACTOR using materials and methods approved by ENGINEER.

Coring for longitudinal joint density testing, core hole repair, and associated expenses will not be paid for separately but shall be included in the work. Traffic control for this work will be paid for in accordance with the contract.

10. TRANSVERSE JOINTS

Placing of the ACCP shall be continuous with minimum transverse joints, and rollers shall not pass over the unprotected end of a freshly laid mixture.

Transverse joints shall be formed by offsetting on the previous run to expose the full depth of the course, 10 feet in length and offset 10 feet to the adjacent pavement. When directed by ENGINEER, a coat of bituminous material shall be used on contact surfaces of all joints just before additional mixture is placed against the previously rolled material.

Where the final lift of asphalt is being installed and terminates where a final lift is not installed the transverse joints will be formed by offsetting on the previous run to expose the full depth of the course 10 feet in length and offset 10 feet to the adjacent pavement. A paper resin joint or wood bulkhead with a ramp will be installed where the final lift terminates to the lower lift.

Provide burlap or paper resin joint with ramp at asphalt replacement/asphalt mill and overlay limits. Prior to paving, the burlap or paper resin joint with ramp shall be removed. Dirt joints are strictly prohibited.

Where paving begins at a transverse joint that has allowed to cool, the entire joint shall be heated with a propane burner creating a uniform heated material tie-in.

When a tapered joint is required for traffic access, the ramp shall be removed back to a full depth from segregated section before paving is restarted.

When restarting paving operations, the paver screed shall be placed on starter block on the completed side of the transverse joint. Starter block should be approximately 25% of the thickness of the existing

completed mat, so that adequate grade and compaction can be achieved on starting the paving operation. The screed should be nulled when on starting blocks and an up angle of attack set. Proper head of mix should be introduced into the paver prior to starting. The new compacted (downstream) side of the joint may be up to 3/16 inches higher than the old (upstream) side.

11. SEGREGATION

The asphalt mixture shall be transported and placed on the roadway without segregation. All segregated areas shall be removed immediately and replaced with specification material before the initial rolling. If more than 50 square feet of segregated pavement is removed and replaced in any continuous 500 linear feet of paver width laydown, operations shall be discontinued until the source of the segregation has been determined and corrected.

OWNER will determine the extent of the segregation. CONTRACTOR will not be allowed additional compensation for correction of segregated areas.

12. COMPACTION

The temperature of the mixture immediately behind the screed be at least 245° F (290° F for PG76-28) and breakdown compaction shall be completed before the mixture temperature falls 20° F.

The ACCP shall be compacted by rolling. Both steel wheel and pneumatic tire rollers are required. The number, weight, and type of rollers furnished shall be that which is sufficient to obtain the required density while the mixture is in a workable condition. Compaction shall begin immediately after the mixture is placed and be continuous until the required density is obtained.

If the required density is not achieved and the surface temperature falls below 185° F, or there is obvious surface distress or breakage, no further compaction effort will be permitted unless approved by OWNER. The criteria for mixtures containing PG76-28 asphalt cements shall be 235° F. Pavement operations shall be suspended when density requirements are not met, and the problem resolved prior to continuing paving operations.

All roller marks shall be removed with the finish rolling. Use of vibratory rollers with the vibrator on will not be permitted during surface course final rolling and will not be permitted on any rolling on bridge decks covered with waterproofing membrane.

All ACCP paving shall be compacted to between 92 and 96 percent of Maximum Theoretical Density (AASHTO T209: Maximum Specific Gravity of Bituminous Paving Mixtures) with the average of five random and consecutive density tests equaling at least 93 percent of T209. If more than three random density tests fall below 93 percent of T209, corrective measures shall be taken by CONTRACTOR. Compaction of less than 90 percent of T209 will be cause for removal and replacement. The most recent T209 Rice value shall be used in calculating Relative Compaction according to CP-44.

CONTRACTOR shall core the pavement as required by OWNER for field density tests in accordance with Colorado Procedure 44, Method B (AASHTO T230), or for field calibration of nuclear density equipment in accordance with the Appendix of Colorado Procedure 81 (ASTM D2950). At a minimum, cores for nuclear density equipment calibration shall be taken at the beginning of placement of each pavement

layer or change of mixture materials or gradation. Untested areas during placement will also require cores to be taken to verify compaction.

Along forms, curbs, headers, walls, and all other places not accessible to the rollers, the mixture shall be thoroughly compacted with mechanical tampers.

Any mixture that becomes loose and broken, mixed with dirt, or is in any way defective, shall be immediately removed and replaced with fresh hot mixture, and compacted to conform with the surrounding area.

Except for leveling courses, the minimum compacted depth of pavement placed in one layer shall be 1½ inches, unless approved by ENGINEER. The maximum compacted depth shall be three (3) inches unless otherwise approved by ENGINEER.

13. TOLERANCE

13.1 Gradation and Asphalt Cement Tolerances

The gradation shall not deviate from the design job mix by more than the following:

TABLE 13.2.1 - GRADATION TOLERANCES

Item	
Passing No. 3/8" and Larger ¹	± 6%
Passing No. 4 and No. 8	± 5%
Passing No. 30	± 4%
Passing No. 50	± 3%
Passing No. 200 ²	± 2%
Asphalt Content	± 0.3%
Asphalt Content, Mixes with >10% RAP	± 0.4%

¹There is 0 percent tolerance for the maximum sieve size.

²Mixes with No. 200 sieve material produced over 7.0 percent are allowed only when Air Voids are kept within 3.0 percent to 5.0 percent and VMA still meets requirements.

When disagreements concerning determination of specification compliance occur between sampling and testing procedures, solvent extracted aggregate testing shall take precedence over burnoff oven extracted aggregate, which shall take precedent over cold feed belt testing.

14. PRICE REDUCTION

The materials and construction shall be price reduced for density and thickness in accordance with the following.

Price reductions shall be per lot based upon a Lot encompassing 250 lineal lane feet and shall be at the cost of the entire pavement system.

TABLE 15.1 – PRICE REDUCTION

Price Reduction	0%	25%	45%	Remove & Replace
Thickness Deficiency	0-0.5 inch	0.51-1.0 inch	1.01-1.5 inch	>1.5 inch
Density	92-96%	91.9-91%	90.9-90%	+97% or below 90%

15. TESTING AND INSPECTION

Test	Standard	Minimum Frequency
Density	ASTM D2950	One Test for Each 250 Lineal Feet/Lane
Thickness (Core)		One Test for Each 250 Lineal Feet/Lane
VMA	CP 48	One for Each Day
Gradation	AASHTO T27	One for Each Day
Hveem/Marshall Stability	CP-L 5105	One for Each Day
AC Content	CP-L 5120 or AASHTO T164	One for Each Day
Maximum Theoretical Density	AASHTO T200	One for Each Day

Inspectors shall be responsible for checking pavement temperatures, segregation, rolling patterns, and other construction means and method which affect the performance of the pavement system. CONTRACTOR shall provide assistance in sampling and testing at all facilities and at the job.

WEATHER LIMITATIONS

Bituminous plant mix shall be placed only on properly constructed surfaces that are free from water, frost, snow, or ice. The bituminous mixtures shall be placed within the air temperature limitations of the following table, when the temperature is rising and only when weather conditions otherwise permit the pavement to be properly placed and finished as determined by ENGINEER.

Placement Air Temperature Limitations

Compacted Thickness	Top Layer	Layers Below Top
1" or less	60° F	50° F
>1" to 3"	50° F	40° F
Greater than 3"	50° F	40° F

Placement temperatures as stated in the above table shall be increased by 5° for each 10 mile per hour wind velocity to a maximum of 70° F.

When it is in the public interest and taking in consideration the construction season, ENGINEER may waive minimum temperature requirements for placing prime coats and layers of bituminous mixtures below the top layer of the completed pavement. Pavement operations will be suspended when density requirements are not met.

Asphalt overlays and top lifts shall not be applied when weather conditions or the threat of rain may prevent completion of the full width asphalt mat.

SURFACE TOLERANCES

For new streets the final surface pavement adjacent to concrete gutter shall be finished from 1/8 inch to 1/4 inch above the lip of the gutter into which it drains.

Any surface pavement that is above the lip more than 1/4 inch shall be removed and replaced to the specified height. Any surface pavement that is below the lip of the gutter shall be corrected as specified above, for new street construction. For street overlays the surface pavement may be 1/2" above the lip.

MANHOLES AND VALVE BOXES

All manholes, valve boxes, and survey range boxes shall be 1/4" below the final compacted asphalt surface. Only cast iron riser rings will be permitted. Any manhole covers, water valve covers, or survey range boxes which do not conform to 1/4" below the final finished asphalt surface shall be removed and corrected.

CONTRACTOR shall provide temporary prefabricated rubber manhole protector safety ramp rings or asphalt ramps with paper resin joints at manhole rings and water valve boxes after milling operations and prior to opening lanes to traffic, as directed by ENGINEER. Rubber ramps or paper resin joints with asphalt ramps shall be removed prior to asphalt leveling and chipseal operation.

There will be no separate payment for this work, all the costs for completing the work shall be incidental to the other items of the contract.

PAVEMENT REPAIR MEMBRANE

Pavement repair membrane shall be furnished and installed as shown on the drawings between the existing pavement and patch. This work shall be done in accordance with these specifications, plans, or as designated by ENGINEER.

The materials to be used shall be:

- a. GlasGrid 8511, manufactured by Tensar International, or approved equal, meeting the minimum specifications.

PROPERTY	TEST METHOD	VALUE
Tensile Strength	ASTM D6637	
Across Width		560 lb/in.
Across Length		560 lb/in.
Elongation at Break %	ASTM D6637	<3%
Melting Point	ASTM D276	>425° F
Mass/Unit Area	ASTM D5261-92	11 oz/yd ²
Roll Length		327 ft
Roll Width		5 ft
Roll Area		181 yd ²
Adhesive Backing		Pressure Sensitive
Grid Size		

Material – Fiberglass reinforcement with modified polymer coating and pressure sensitive adhesive backing.

CONSTRUCTION REQUIREMENTS

The areas to be treated shall be as shown on the typical section or as designated by ENGINEER. The pavement surface shall be broomed clean of all dirt and foreign material immediately prior to beginning the crack reduction treatment using a self-propelled power pick up broom.

The fabric or repair membrane shall be applied in accordance with the manufacturer's recommendations. The asphalt cement (AC-10) tack coat shall be applied to the pavement surface at the rate of approximately 0.25 to 0.30 gal./sq. yd., and at a temperature of 300 to 350° F.

Installation of the fabric or repair membrane shall be installed within 6" from gutter lip. Installation of fabric or repair membrane shall be performed as recommended by the manufacturer and such that there are no wrinkles and the overlap at joints shall be 1" to 6". End joints shall be made to overlap or "shingle" in the direction of the asphalt overlay. Excess fabric or repair membrane shall be cut and removed to ensure that overlaps of adjacent rolls do not exceed 6". Additional tack coat shall be applied between all fabric or repair membrane overlaps. Any locations that do not have additional tack for the overlaps shall be corrected by manual placement of tack coat prior to overlay construction.

Installation of pavement fabric or repair membrane shall be kept within a distance of 300' in advance of paving equipment. Hauling units shall be operated so that driving, braking, turning movements, and reversing direction of travel do not cause wrinkling, folding, lifting, or displacement of the fabric. Damaged fabric or repair membrane shall be replaced without additional payment. Where wrinkles occur, the fabric or repair membrane shall be cut and laid flat. Corrected wrinkle areas and seams between rolls shall be retacked with asphalt cement to ensure fabric saturation. Hauling units shall not be allowed to pull on the new asphalt directly from the pavement fabric. The material supplier shall have a technical representative available during this operation.

Traffic shall be kept off the newly placed treatment material until the bituminous surface has been placed and compacted.

The minimum temperature of the HBP at the time compaction begins shall be 250° F. To assure this temperature, the mixing discharge temperature may be up to 30° F higher than would otherwise be permitted by the job-mix formula.

PAVEMENT FABRIC

Pavement fabric shall be furnished and installed as shown on the drawings between the existing pavement and overlay. This work shall be done in accordance with these specifications, plans, or as designated by ENGINEER.

The materials to be used shall be:

- (a) Petromat Fabric manufactured by Phillips Petroleum Company, or approved equal, meeting the minimum specifications:

NEEDLE PUNCHED, NONWOVEN 100% POLYPROPYLENE STAPLE FIBER FABRIC - MATERIAL SPECIFICALLY DESIGNED FOR PAVEMENT APPLICATION AND SHALL BE THERMALLY BONDED ON ONE SIDE ONLY.

<u>PROPERTY</u>	<u>MINIMUM VALUE</u>	<u>TEST METHOD</u>
Tensile Strength, lb	90	ASTM D4632
Elongation at Break, %	55	ASTM D4632
Asphalt Retention, gal/sq. yd., min.	0.20	*Task Force 25 #8
Melting Point, °F, or greater	300	ASTM D276

* TASK FORCE 25 IS A SUBCOMMITTEE OF THE JOINT COMMITTEE ON NEW HIGHWAY MATERIALS, WHICH IS MADE UP OF REPRESENTATIVES OF AASHTO, AGC, AND ARTBA.

(b) Asphalt Cement (AC-10)

CONSTRUCTION REQUIREMENTS

The areas to be treated shall be as shown on the typical section or as designated by ENGINEER. The pavement surface shall be broomed clean of all dirt and foreign material immediately prior to beginning the crack reduction treatment using a self-propelled power pick up broom.

The fabric shall be applied in accordance with the manufacturer's recommendations immediately after the application of tack coat. The asphalt cement (AC-10) tack coat shall be applied to the pavement surface at the rate of approximately 0.25 to 0.30 gal./sq. yd., and at a temperature of 300 to 350° F.

Installation of the fabric shall be installed within 6" from gutter lip. Installation of fabric shall be performed as recommended by the manufacturer and such that there are no wrinkles and the overlap at joints shall be 1" to 6", end joints shall be made to overlap or "shingle" in the direction of the asphalt overlay. Excess fabric shall be cut and removed to ensure that overlaps of adjacent rolls do not exceed 6". Additional tack coat shall be applied between all fabric overlaps. Any locations that do not have additional tack for the overlaps shall be corrected by manual placement of tack coat prior to overlay construction.

Installation of pavement fabric shall be kept within a distance of 300' in advance of paving equipment. Hauling units shall be operated so that driving, braking, turning movements, and reversing direction of travel do not cause wrinkling, folding, lifting, or displacement of the fabric. Damaged fabric shall be replaced without additional payment. Where wrinkles occur, the fabric shall be cut and laid flat. Corrected wrinkle areas and seams between rolls shall be retacked with asphalt cement to ensure fabric saturation. Hauling units shall not be allowed to pull on the new asphalt directly from the pavement fabric. The material supplier shall have a technical representative available during this operation.

Traffic shall be kept off the newly placed treatment material until the bituminous surface has been placed and compacted.

The minimum temperature of the HBP at the time compaction begins shall be 250° F. To assure this temperature, the mixing discharge temperature may be up to 30° F higher than would otherwise be permitted by the job-mix formula.

5.0 SPECIAL CONDITIONS

RAISING MANHOLE COVERS AND VALVE BOXES

CONTRACTOR shall provide all necessary cast iron adjustment rings. CONTRACTOR shall furnish all other materials, labor, and equipment for the adjustment of all existing manhole covers and valve boxes to the proper elevation as determined by ENGINEER. Manhole covers and valve boxes shall be adjusted to finish grade prior to resurfacing top layer. Asphalt patching shall be completed prior to street resurfacing.

There will be no separate payment for this work, all the costs for completing the work shall be incidental to the other items of the contract.

PUBLIC NOTIFICATION

At least 48 hours prior to the start of construction at each location, CONTRACTOR shall notify in writing the residents or businesses adjacent to the work. The notification shall use CONTRACTOR's letterhead, follow the template below, and include a description of the work, a schedule for completion of the work, and the name and phone number of the CONTRACTOR's contact person. **The notification format shall be approved by ENGINEER prior to distribution.**

Dear Homeowner/Businessowner:

The City of Louisville and [CONTRACTOR NAME] have entered into a contractual agreement to perform resurfacing work in your neighborhood for the 2025 Street Resurfacing Project. *[As a reminder, your neighborhood is scheduled for full depth reconstruction and vehicular access to your street will be restricted and alternative parking will be necessary. We apologize for this inconvenience and appreciate your patience.]*

Construction in your neighborhood is anticipated to begin on [INITIAL DATE OF CONSTRUCTION]. We anticipate work taking approximately [NUMBER] working days to complete.

*Note: The scheduled dates may change or extend if adverse weather conditions occur.

All vehicles will need to be removed from the street by 7:00 AM if "NO PARKING" signs are on your street to allow the contractors access to the area. The "NO PARKING" signs will be placed on your street 24 hours prior to work beginning. The process will require that your street be closed for parking most of the day, so please make arrangements to park any vehicles you need outside the work area. Every effort will be made to have the street open by 5:00 PM.

We appreciate your cooperation and will make every effort to minimize any inconvenience to you. The following personnel are available for assistance:

[CONTRACTOR NAME]

City of Louisville

[CONTRACTOR CONTACT PHONE NUMBER] _____

CLOSURE OF THE ROADWAY

Access to residential driveways shall be provided and maintained with a temporary ramp overnight when work has terminated for the day and when work is not in progress. There will be no separate payment for this work; all the costs for completing the work shall be incidental to the other items of the contract.

Local access shall be maintained by CONTRACTOR at all times unless otherwise directed by ENGINEER.

Once ENGINEER has allowed construction to begin on any portion of the roadway, CONTRACTOR shall progress continuously until the final paving has been completed and the roadway open to through traffic on a daily basis. Continuous progress shall be defined as a minimum of six (6) hours per day Monday through Friday by the minimum sized crew required to continue progress on the controlling operations.

MISCELLANEOUS

Truck haul routes shall be approved by OWNER prior to construction.

6.0 BASIS OF PAYMENT

The entire cost of the work and material necessary to complete all terms shown or implied on the drawings or specified herein shall be included and merged into the pay items shown in the Bid Proposal. All associated work necessary for the proper and complete installation of this project and associated bonding, maintenance, and guarantees shall be merged into the pay items shown in the Bid Proposal. All payments shall be subject to the conditions of these specifications. All pay items shall include sales tax, licenses, permits, and other taxes required to complete the work. No additional compensation will be allowed for any item unless a change order is issued by ENGINEER.

Minor items and minor details are not listed but shall be part of the complete contract.

The depths of hot asphalt pavement, patching, and overlay specified shall be depth after compaction.

Furnishing and installing cast iron manhole and water valve box risers will not be paid for separately but shall be included in the work.

Paper resin joints or prefabricated rubber manhole protector safety ramp rings at asphalt replacement/asphalt mill and overlay limits, manhole rings, and water valve boxes will not be paid for separately but shall be included in the work.

Labor and equipment required to load and haul bulk water will not be paid for separately but shall be included in the work.

Temporary ramps at street and private drive locations shall be provided by CONTRACTOR during non-construction periods and will not be paid for separately but shall be included in the work.

The following items in this section are representatives of all work items required and therefore are not referred to by proposal or item number for each individual work item.

MOBILIZATION

1. Scope of Work

This item consists of the mobilization of personnel, equipment, and supplies to the project sites. This item also includes obtaining of all permits and conformance to all permit requirements, bonds, insurance, public and media relations, administrative items, furnishing and erecting temporary construction facilities, project signs, and all other work and operations that must be performed or costs incurred before beginning work on the project site, as well as demobilization and project closeout, all as required for the complete and proper performance and completion of the work. All gasoline, oil, fuel hydraulic fluids, and other contaminating fluids shall be properly removed and disposed of offsite. No objectionable materials shall be allowed to blow from, wash off or drain off of the staging area on to adjacent property.

2. Method of Measurement and Payment

Payment will be made based on the lump sum price in the Bid Form.

Bid price for mobilization shall not exceed, in any case, 6% of the total bid price (Excluding Force Account items, erosion control, and traffic control items) for the project.

EROSION CONTROL

1. Scope of Work

This work shall consist of furnishing all labor, materials, equipment, installation and removal of curb socks, concrete washout, silt fence, and other BMPs as required by the Project Manager. CONTRACTOR shall provide submittal sheet for approval of BMPs as requested.

2. Method of Measurement and Payment

Payment for EROSION CONTROL shall be made on a lump sum basis and shall be full compensation of all work necessary to complete the item.

UNCLASSIFIED EXCAVATION (TRAIL RIDGE DRIVE)

1. Scope of Work

This work shall consist of furnishing all labor, materials, equipment for UNCLASSIFIED EXCAVATION and shall include removal, loading, and haul of existing asphalt to a disposal site. The work shall also include removal, loading, haul and disposal of existing base course, sub base and other miscellaneous material to the depth of final finished subgrade per plan for subgrade cement treatment.

2. Method of Measurement and Payment

Payment will be made on a field measured removed square yard basis. Payment for UNCLASSIFIED EXCAVATION shall be full compensation for all work necessary to complete the item.

No payment will be made for over excavation beyond plan limits.

UNCLASSIFIED EXCAVATION (ENCLAVE CIR., ENCLAVE WAY AND W. PINE CT.)

1. Scope of Work

UNCLASSIFIED EXCAVATION (ENCLAVE CIR., ENCLAVE WAY AND W. PINE CT.) shall include saw cutting, removal, loading, and haul of existing asphalt to a disposal site. The material shall become the property of the Contractor. The work shall also include removal, loading, haul and disposal of existing base course, sub base and other miscellaneous material to the depth of final finished subgrade per plan. The work shall include final subgrade grading and compaction.

1. Method of Measurement and Payment

Payment will be made on a field measured removed square yard basis. Payment for UNCLASSIFIED EXCAVATION (ENCLAVE CIR., ENCLAVE WAY AND W. PINE CT.) shall be full compensation of all work necessary to complete the item.

No payment will be made for over excavation beyond plan limits.

UNCLASSIFIED EXCAVATION (ALLEY)

1. Scope of Work

This work shall consist of furnishing all labor, materials, equipment for UNCLASSIFIED EXCAVATION (ALLEY) and shall include saw cutting, removal, loading, and haul of existing asphalt to a disposal site. The work shall also include removal, loading, haul, and disposal of existing base course, subbase, and other miscellaneous material to the depth of final finished subgrade. The work shall include subgrade preparation to a depth of 16" as specified and recompacted in accordance with the city of Louisville Construction Standards, unless otherwise noted. Existing asphalt shall become the property of CONTRACTOR.

2. Method of Measurement and Payment

Payment will be made on a field measured removed square yard basis. Payment for UNCLASSIFIED EXCAVATION (ALLEY) and shall be full compensation of all work necessary to complete the item.

No payment will be made for over excavation beyond plan limits.

STRUCTURE EXCAVATION AND BACKFILL (STREET RESURFACING)

1. Scope of Work

This work shall consist of furnishing all labor, materials, equipment, excavation, loading, haul, and disposal for STRUCTURE EXCAVATION AND BACKFILL (STREET RESURFACING) to remove unsuitable foundation material. Upon direction of ENGINEER, CONTRACTOR shall excavate additional material to a depth specified by ENGINEER that may be required. The provisions of this section will only be implemented in areas designated by ENGINEER where subgrade is determined unsuitable. All material removed shall become the property of CONTRACTOR and shall be properly disposed of outside the limits of the project at no additional cost.

This work shall also include furnishing all labor, material, equipment, loading, haul, placing, and compaction of STRUCTURE EXCAVATION AND BACKFILL (STREET RESURFACING). Structure backfill shall have a liquid limit not exceeding 35 and a plasticity index of not over 6 when determined in conformity with AASHTO T89 and T90, respectively. Structure Backfill shall be a combination of **one part** Class 6 and **one part** Class 4 recycled concrete base course and conform to the requirements of the Colorado Department of Transportation Standard Specifications for Road and Bridge Construction, 2011 Edition, Classification for Aggregate Base Course Section 703. Samples and test data on material to be used shall be submitted to ENGINEER stating the structure backfill meets these requirements.

2. Method of Measurement and Payment

Payment will be made on a field measured removed cubic yard basis. Quantity will be determined by ENGINEER, on an in place volume prior to removal. Payment for STRUCTURE EXCAVATION AND BACKFILL (STREET RESURFACING) shall be full compensation of all work necessary to complete the item.

No payment will be made for over excavation beyond plan limits.

STRUCTURAL EXCAVATION AND BACKFILL (ALLEY)

1. Scope of Work

This work shall consist of furnishing all labor, materials, equipment for STRUCTURAL EXCAVATION AND BACKFILL (ALLEY) to remove unsuitable foundation material. The work shall include structural excavation and backfill below the virgin hot asphalt pavement Grade S (4") and 12' Class 6 recycled concrete base course section. Upon direction of ENGINEER, CONTRACTOR shall excavate additional material to a depth specified by ENGINEER that may be required. The provisions of this section will only be implemented in areas designated by ENGINEER where subgrade is determined unsuitable. All material removed shall become the property of CONTRACTOR and shall be properly disposed of outside the limits of the project at no additional cost.

This work shall also include furnishing all labor, material, equipment, loading, haul, placing, and compaction of STRUCTURAL EXCAVATION AND BACKFILL (ALLEY). Structural backfill shall have a liquid limit not exceeding 35 and a plasticity index of not over 6 when determined in conformity with AASHTO T89 and T90, respectively. Structural Backfill shall be Class 6 recycled concrete base course and conform to the requirements of the Colorado Department of Transportation Standard Specifications for Road and Bridge Construction, 2011 Edition, Classification for Aggregate Base Course Section 703. Samples and test data on material to be used shall be submitted to ENGINEER stating the structural backfill meets these requirements.

2. Method of Measurement and Payment

Payment will be made on a field measured removed cubic yard basis. Quantity will be determined by ENGINEER, on an in-place volume prior to removal. Payment for STRUCTURAL EXCAVATION AND BACKFILL (ALLEY) shall be full compensation of all work necessary to complete the item.

No payment will be made for over excavation beyond plan limits.

IMPORTED BORROW (COMPLETE IN PLACE)

1. Scope of Work

This work shall consist of furnishing all labor, materials, equipment, loading, haul, placing, shaping, and compaction of IMPORTED BORROW (COMPLETE IN PLACE). Imported Borrow shall be **recycled concrete base** course and conform to the requirements of Colorado Department of Transportation Standard Specifications for Road and Bridge Construction, 2011 Edition Class 6 Classification for Aggregate Base Course Section 703. Samples and test data on material to be used shall be submitted to the Engineer stating the borrow meets these requirements.

2. Method of Measurement and Payment

Payment will be paid by the ton for IMPORTED BORROW (COMPLETE IN PLACE) and shall be full compensation for all work necessary to complete the item.

REMOVE EXISTING 6" MH RING AND COVER AND INSTALL NEW 6" MANHOLE RING AND COVER (30") STORM

1. Scope of Work

Work shall consist of furnishing all labor, materials, equipment for the construction, and construction necessary relating to the installation to REMOVE EXISTING 6" MH RING AND COVER AND INSTALL NEW 6" MANHOLE RING AND COVER (30") STORM and appurtenances per the plans and specifications.

Work shall include asphalt and concrete saw cutting and removal, loading, haul and disposal of existing asphalt and concrete, manhole ring and cover and appurtenances and miscellaneous material. Work shall include new 6" manhole ring and cover, excavation, backfill, compaction, and other items incidental.

2. Method of Measurement and Payment

Payment will be made on an each installed basis to REMOVE EXISTING 6" MH RING AND COVER AND INSTALL NEW 6" MANHOLE RING AND COVER (30") STORM and shall be full compensation for all work necessary to complete the item.

REMOVE EXISTING 6" MH RING AND COVER AND INSTALL NEW 4" MANHOLE RING AND COVER (24") SEWER

1. Scope of Work

Work shall consist of furnishing all labor, materials, equipment for the construction, and construction necessary relating to the installation to REMOVE EXISTING 6" MH RING AND COVER AND INSTALL NEW 4" MANHOLE RING AND COVER (24") SEWER and appurtenances per the plans and specifications.

Work shall include asphalt and concrete saw cutting and removal, loading, haul and disposal of existing asphalt and concrete, manhole ring and cover and appurtenances and miscellaneous material. Work shall include new 6" manhole ring and cover, excavation, backfill, compaction, and other items incidental.

2. Method of Measurement and Payment

Payment will be made on an each installed basis to REMOVE EXISTING 6" MH RING AND COVER AND INSTALL NEW 4" MANHOLE RING AND COVER (24") SEWER and shall be full compensation for all work necessary to complete the item.

EDGE COLD MILLING ASPHALT PAVEMENT (0" TO 1.5")

1. Scope of Work

This work consists of but not be limited to furnishing all labor, materials, equipment, loading, haul, sweeping, and cleanup for EDGE COLD MILLING ASPHALT PAVEMENT (0" TO 1.5") as indicated on the plans, cross sections or otherwise designated by ENGINEER. Areas milled past the limits designated by ENGINEER will be at CONTRACTOR's expense and not be paid for. Cold milling shall be performed using mechanical equipment capable of uniformly routing materials while providing a uniform milled level or tapered surface, to a depth specified on the plans, varying 6-8 feet wide and capable to vary between zero to 1.5 inches in depth and maintain an accurate cut per pass. Milled edges shall be vertical and true with the alignment of each pass of the equipment. The milled match point longitudinal pass overlap grade shall not deviate from a straight edge by more than 3/8 inch at any point.

The tram rate of the machine shall not exceed the tooth pattern design speed of the cutting drum. Operation with broken or missing teeth will not be allowed. Worn teeth shall be replaced if the machine does not produce a uniform surface. Grooves shall not be deeper than 1/2 inch deep. Milling operations will be suspended should the mill not produce a uniform surface until the problem is corrected. During

the milling operation sweepers shall follow immediately behind the milling machine. All milled areas shall be swept and broomed clean with pick-up style sweepers. Windrows will not be allowed. Under no circumstances will traffic be allowed on the milled surface until all sweeping and cleaning has been completed. Sweeping of gutters and sidewalks shall be included. All milled areas shall be swept and broomed clean. If CONTRACTOR fails to adequately clean the street, all milling and paving work shall cease until the street is properly cleaned. Under no circumstances will traffic be allowed on the milled surface until all sweeping and cleaning has been completed. Sweeping of gutters and sidewalks shall be included.

Vertical cuts in the roadway shall not be left overnight. At the completion of each day's work, longitudinal edges shall be tapered to not less than a 3:1 slope and transverse edges tapered to not less than a 50:1 slope.

This work shall also consist of providing a smaller machine to trim areas not accessible to the larger machine at manholes, valve boxes, curb returns, and intersections. All trimming work shall be milled to grade.

All removed material and materials generated by the milling process shall become property of the Contractor, except that 450 tons of asphalt millings shall remain property of The City of Louisville. 225 ton shall be hauled to the Wastewater Treatment Plant located at 1601 Empire Road. 150 ton shall be hauled to the Sid Copeland Water Treatment Plant located at 1955 N. Washington Avenue. 75 ton shall be hauled to the Howard Berry Water Treatment Plant located at 7000 Marshall Road.

Cost for loading, haul and delivery of the material shall not be paid for separately but shall be incidental to the work. All other removed material and materials generated by the milling process shall become property of the Contractor.

2. Method of Measurement and Payment

Payment will be made on a field measured milled square yard basis completed to the required depth, width and accepted. Payment for EDGE COLD MILLING ASPHALT PAVEMENT (0" TO 1.5") shall be full compensation for all work necessary to complete the item.

COLD MILLING ASPHALT PAVEMENT (1.5"), (2")

1. Scope of Work

This work consists of but not be limited to furnishing all labor, materials, equipment, loading, haul, sweeping, and cleanup for COLD MILLING ASPHALT PAVEMENT (1.5"), (2") as indicated on the plans, cross sections or otherwise designated by ENGINEER. Areas milled past the limits designated by ENGINEER will be at CONTRACTOR's expense and not be paid for. Cold milling shall be performed using mechanical equipment capable of uniformly routing materials while providing a uniform milled level or tapered surface, to a depth specified on the plans, varying 6-8 feet wide and capable to vary between zero to 4 inches in depth and maintain an accurate cut per pass. Milled edges shall be vertical and true with the alignment of each pass of the equipment. The milled match point longitudinal pass overlap grade shall not deviate from a straight edge by more than 3/8 inch at any point.

The tram rate of the machine shall not exceed the tooth pattern design speed of the cutting drum. Operation with broken or missing teeth will not be allowed. Worn teeth shall be replaced if the machine does not produce a uniform surface. Grooves shall not be deeper than ½ inch deep. Milling operations will be suspended should the mill not produce a uniform surface until the problem is corrected. During the milling operation sweepers shall follow immediately behind the milling machine. All milled areas shall be swept and broomed clean with pick-up style sweepers. Windrows will not be allowed. Under no circumstances will traffic be allowed on the milled surface until all sweeping and cleaning has been completed. Sweeping of gutters and sidewalks shall be included. If CONTRACTOR fails to adequately clean the street, all milling and paving work shall cease until the street is properly cleaned. Sweeping of gutters and sidewalks shall be included.

Vertical cuts in the roadway shall not be left overnight. At the completion of each day's work, longitudinal edges shall be tapered to not less than a 3:1 slope and transverse edges tapered to not less than a 50:1 slope.

This work shall also consist of providing a smaller machine to trim areas not accessible to the larger machine at manholes, valve boxes, curb returns, and intersections. All trimming work shall be milled to grade.

Overlaps will not be measured and paid for separately but shall be included in the work.

2. Method of Measurement and Payment

Payment will be made on a field measured milled square yard basis completed to the required depth, width and accepted. Payment for COLD MILLING ASPHALT PAVEMENT (1.5"), (2") shall be full compensation for all work necessary to complete the item.

COLD MILL PATCH GRADE SX (1.5"), (2")

1. Scope of Work

This work shall consist of furnishing all labor, materials and equipment, haul, aggregate, asphalt cement, asphalt recycling agent, additive and all other pavement work necessary to install COLD MILL PATCH GRADE SX (1.5"), (2") to the limits and depths on the plans and as directed by ENGINEER.

This work shall consist of asphalt milling, removal, loading, haul, and disposal of existing asphalt, material, and installing hot asphalt patch.

2. Removal of Asphalt

The areas to be patched shall be milled to the limit specified by ENGINEER. All removed material shall become the property of CONTRACTOR and will be disposed of properly. Prior to removal ENGINEER will mark out the limits of the patch and only the marked area is to be milled. Any additional milling will not be paid for and will be corrected at CONTRACTOR's expense.

3. Acceptable Methods of Patching

Acceptable methods for the installation of asphalt patching shall include, but not be limited to, the use of a self-propelled Leboy, to uniformly spread the hot bituminous materials in lifts, prior to rolling. The area to be patched shall be adequately tacked. Compaction of the hot asphalt shall be completed in lifts and conform to the City of Louisville Design and Construction Standards.

4. Method of Measurement and Payment

Payment will be made on a per square yard basis for COLD MILL PATCH GRADE SX (1.5"), (2") and shall be full compensation for all work necessary to complete the item.

HOT ASPHALT PATCH GRADE SX (4"),(6")

1. Scope of Work

This work shall consist of furnishing all labor, materials, and equipment to install a HOT ASPHALT PATCH GRADE SX (4"),(6") to the limits and depths on the plans and specifications.

This work shall consist of saw cutting, removing, loading, haul, and disposal of existing asphalt, subgrade, and roadbase material, removal of tree roots within the top 6" of the subgrade, preparing and compacting the subgrade, and installing hot asphalt patching.

2. Removal of Asphalt

The areas to be patched shall be cut out and removed leaving neat straight edges. All removed material shall become the property of CONTRACTOR and will be disposed of properly. Prior to removal ENGINEER will mark out the limits of the patch, only the marked area is to be removed. Any additional removal will not be paid for and will be corrected at CONTRACTOR's expense.

3. Acceptable Methods of Patching

Acceptable methods for the installation of asphalt patching shall include, but not be limited to, with the use of a self-propelled Leeboy paver or approved equal, to uniformly spread the hot bituminous materials in lifts, prior to rolling. The self-propelled Leeboy paver or approved equal is required for the final lift installation. The area to be patched shall be adequately tacked. Compaction of the hot asphalt shall be completed in lifts and conform to the City of Louisville Design and Construction Standards.

4. Method of Measurement and Payment

Payment will be made on field measured installed square yard basis for HOT ASPHALT PATCH GRADE SX (4"),(6") except that the area will be marked and measured prior to construction. Payment for removing existing asphalt, subgrade and roadbase material, preparing subgrade, and replacing asphalt with a hot asphalt patching and shall be full compensation for all work necessary to complete the item.

18" WIDE x 3" DEEP COLD MILL PATCHING WITH CRACK FILLING AND PAVEMENT REPAIR MEMBRANE
18" WIDE x 4" DEEP COLD MILL PATCHING WITH CRACK FILLING AND PAVEMENT REPAIR MEMBRANE

1. Scope of Work

This work shall consist of furnishing all labor, materials, equipment, cold milling, loading, haul, and disposal for:

- 18" WIDE x 3" DEEP COLD MILL PATCHING WITH CRACK FILLING AND PAVEMENT REPAIR MEMBRANE
- 18" WIDE x 4" DEEP COLD MILL PATCHING WITH CRACK FILLING AND PAVEMENT REPAIR MEMBRANE.

Upon direction of ENGINEER, CONTRACTOR shall cold mill additional material to the depth specified by ENGINEER below the limits of COLD MILLING ASPHALT PAVEMENT (Complete in Place). Work shall include crack filling by cleaning cracks with compressed air, installing tack coat and hot asphalt fines and compaction of hot asphalt fines, pavement repair membrane, tack coat and Hot Asphalt Patching Grade SX (3"), SX (4"). All material removed shall become the property of CONTRACTOR and shall be properly disposed of outside the limits of the project at no additional cost.

All cracks shall be filled flush with hot asphalt fines and compacted flush with the pavement surface. Cracks to be filled shall be clean and free from all debris, dust, loose material, and moisture to a depth of approximately twice the crack width immediately prior to tack coat and hot asphalt fines application.

Pavement repair membrane shall be GlassGrid 8511, 12" width or approved equal.

This work shall also include furnishing all labor, material, equipment, traffic control, loading, haul, placing, and compaction of:

- 18" WIDE x 3" DEEP COLD MILL PATCHING WITH CRACK FILLING AND PAVEMENT REPAIR MEMBRANE
- 18" WIDE x 4" DEEP COLD MILL PATCHING WITH CRACK FILLING AND PAVEMENT REPAIR MEMBRANE.

2. Method of Measurement and Payment

Payment will be made on a field measured square yard basis completed to the required depth, width and accepted. Payment for

- 18" WIDE x 3" DEEP COLD MILL PATCHING WITH CRACK FILLING AND PAVEMENT REPAIR MEMBRANE
- 18" WIDE x 4" DEEP COLD MILL PATCHING WITH CRACK FILLING AND PAVEMENT REPAIR MEMBRANE

shall be full compensation for all work necessary to complete the item.

HOT ASPHALT PAVEMENT GRADE SX LEVELER COURSE

1. Scope of Work

This work shall consist of furnishing all labor, materials and equipment, haul, aggregate, asphalt cement, asphalt recycling agent, additives, manhole and water valve box risers, and all other pavement work necessary to install HOT ASPHALT PAVEMENT GRADE SX LEVELER COURSE, to the full street width, length and depths on the plans and as directed by ENGINEER.

2. Method of Measurement and Payment

Payment will be made on a per TON basis for HOT ASPHALT PAVEMENT GRADE SX LEVELER COURSE and shall be full compensation for all work necessary to complete the item.

HOT ASPHALT PAVEMENT GRADE S (2.5")

1. Scope of Work

This work shall consist of furnishing all labor, materials, equipment, haul, aggregate, asphalt cement, asphalt recycling agent, additives and all other pavement work necessary to install and complete HOT ASPHALT PAVEMENT GRADE S (2.5") to the limits and depths on the plans and as directed by ENGINEER.

2. Method of Measurement and Payment

The accepted quantities of HOT ASPHALT PAVEMENT GRADE S (2.5") will be paid for at the contract unit price per square yard for each depth specified, installed, and field measured and shall be full compensation for all work necessary to complete the item.

HOT ASPHALT PAVEMENT GRADE S (4.5")

1. Scope of Work

This work shall consist of furnishing all labor, materials, equipment, haul, aggregate, asphalt cement, asphalt recycling agent, additives and all other pavement work necessary to install and complete HOT ASPHALT PAVEMENT GRADE S (4.5") to the limits and depths on the plans and as directed by ENGINEER.

2. Method of Measurement and Payment

The accepted quantities of HOT ASPHALT PAVEMENT GRADE S (4.5") will be paid for at the contract unit price per square yard for each depth specified, installed, and field measured and shall be full compensation for all work necessary to complete the item.

VIRGIN HOT ASPHALT PAVEMENT GRADE SX (1.5") OVERLAY

1. Scope of Work

This work shall consist of furnishing all labor, materials and equipment, haul, aggregate, asphalt cement, asphalt recycling agent, additives and all other pavement work necessary to install a VIRGIN HOT ASPHALT PAVEMENT GRADE SX (1.5") OVERLAY to the limits and depths on the plans and as directed by ENGINEER.

2. Method of Measurement and Payment

Payment will be made on a per square yard basis for VIRGIN HOT ASPHALT PAVEMENT GRADE SX (1.5") OVERLAY and shall be full compensation for all work necessary to complete the item.

VIRGIN HOT ASPHALT PAVEMENT GRADE SX (1.5")

1. Scope of Work

This work shall consist of furnishing all labor, materials, equipment, haul, aggregate, asphalt cement, asphalt recycling agent, additives and all other pavement work necessary to install and complete HOT ASPHALT PAVEMENT GRADE SX (1.5") to the limits and depths on the plans and as directed by ENGINEER.

2. Method of Measurement and Payment

Payment will be made on a per square yard basis for VIRGIN HOT ASPHALT PAVEMENT GRADE SX (1.5") and shall be full compensation for all work necessary to complete the item.

VIRGIN HOT ASPHALT PAVEMENT GRADE S (4") AND 12" CLASS 6 RECYCLE CONCRETE

1. Scope of Work

This work shall consist of furnishing all labor, materials, equipment, loading, haul, placing, shaping, compaction, aggregate, asphalt cement, asphalt recycling agent, additive and all other pavement work necessary to install **VIRGIN HOT ASPHALT PAVEMENT GRADE S (4") AND 12" CLASS 6 RECYCLE CONCRETE**.

This work shall also include furnishing all labor, material, equipment, loading, haul, placing, grading and compaction of 12" CLASS 6 RECYCLE CONCRETE. **Recycle concrete** shall conform to the requirements of Colorado Department of Transportation Standard Specifications for Road and Bridge Construction, 2011 Edition Class 6 Classification for Aggregate Base Course Section 703. Samples and test data on material to be used shall be submitted to ENGINEER stating the backfill meets these requirements.

Virgin hot asphalt pavement grade S (4") shall be installed to the limits and depths on the plans and as directed by ENGINEER.

2. Method of Measurement and Payment

Payment will be made on a per square yard basis for VIRGIN HOT ASPHALT PAVEMENT GRADE S (4") AND 12" CLASS 6 RECYCLE CONCRETE and shall be full compensation for all work necessary to complete the item.

SKIN (SURFACE) PATCHING - GRADE SX

1. Scope of Work

This work shall consist of furnishing all labor, materials and equipment, haul, aggregate, asphalt cement, tack coat, asphalt recycling agent, additives, placement, compaction and all other pavement work necessary to install SKIN (SURFACE) PATCHING GRADE SX to the width, length, and depths on the plans and as directed by ENGINEER.

2. Method of Measurement and Payment

Payment will be made on a per TON basis for SKIN (SURFACE) PATCHING GRADE SX shall be full compensation for all work necessary to complete the item.

SPEED CUSHION

1. Scope of Work

This work shall consist of furnishing all labor, materials, equipment, demolition, haul, cold asphalt milling, aggregate, asphalt cement, tack coat, asphalt recycling agent, additives, placement, compaction incidentals all other pavement work necessary to install SPEED CUSHION, in accordance with the specifications to areas as directed by ENGINEER.

2. Method of Measurement and Payment

Payment will be made on an each basis for SPEED CUSHION and shall be full compensation for all work necessary to complete the item.

RAISED CROSSWALK (SPEED TABLE)

1. Scope of Work

This work shall consist of furnishing all labor, materials, equipment, demolition, haul, cold asphalt milling, aggregate, asphalt cement, tack coat, asphalt recycling agent, additives, placement, compaction incidentals all other pavement work necessary to install RAISED CROSSWALK (SPEED TABLE), in accordance with the specifications to areas as directed by ENGINEER.

2. Method of Measurement and Payment

Payment will be made on an each basis for RAISED CROSSWALK (SPEED TABLE) and shall be full compensation for all work necessary to complete the item.

REMOVE SIGN AND POST

1. Scope of Work

This work shall consist of furnishing all labor, materials and equipment, and incidentals necessary for the construction relating to REMOVE SIGN AND POST including, but not limited to, removing existing sign post and signs per the plans and specifications.

2. Method of Measurement and Payment

Payment will be made on a per each basis for REMOVE SIGN AND POST and shall be full compensation for all work necessary to complete the item.

REMOVE AND REPLACE SIGN POST

1. Scope of Work

This work shall consist of furnishing all labor, materials and equipment, and incidentals necessary for the construction relating to REMOVE AND REPLACE SIGN POST including, but not limited to, removing existing sign post and signs and install new post anchor sleeve, sign post, bolts, mounting hardware, and reinstalling existing signs on new sign post and appurtenant fittings per the plans and specifications.

2. Method of Measurement and Payment

Payment will be made on a per each basis for REMOVE AND REPLACE SIGN POST and shall be full compensation for all work necessary to complete the item.

REMOVE AND REPLACE SIGN

Sign panel materials shall conform to section 713 of the Colorado Department of Transportation Standard Specifications for Road and Bridge Construction, and to the detail shown on the plans. Layout and font design shall conform to the Manual on Uniform Traffic Control Devices (MUTCD) and in accordance with the construction plans.

Sign panels shall be produced in accordance with the retroreflective sheeting manufacturer's recommendations and conform to Section 713.10 Quality Requirements of Reflective Materials of the Colorado Department of Transportation Standard Specifications for Road and Bridge Construction.

1. Scope of Work

This work shall consist of furnishing all labor, materials and equipment, and incidentals necessary for the construction relating to REMOVE AND REPLACE SIGN. Remove signs and furnish and install new signs, including but not limited to, sign panel, retroreflective sign sheeting, bolts, mounting hardware, and appurtenant fittings per the plans and specifications.

2. Method of Measurement and Payment

Payment will be made on a per each basis for REMOVE AND REPLACE SIGN and shall be full compensation for all work necessary to complete the item.

FURNISH AND INSTALL NEW SIGN

Sign panel materials shall conform to section 713 of the Colorado Department of Transportation Standard Specifications for Road and Bridge Construction, and to the detail shown on the plans. Layout and font design shall conform to the Manual on Uniform Traffic Control Devices (MUTCD) and in accordance with the construction plans.

Sign panels shall be produced in accordance with the retroreflective sheeting manufacturer's recommendations and conform to Section 713.10 Quality Requirements of Reflective Materials of the Colorado Department of Transportation Standard Specifications for Road and Bridge Construction.

1. Scope of Work

This work shall consist of furnishing all labor, materials and equipment, and incidentals necessary for the construction relating to FURNISH AND INSTALL NEW SIGN. Remove signs and furnish and install new signs, including but not limited to, sign panel, retroreflective sign sheeting, bolts, mounting hardware, and appurtenant fittings per the plans and specifications.

2. Method of Measurement and Payment

Payment will be made on a per each basis for FURNISH AND INSTALL NEW SIGN. and shall be full compensation for all work necessary to complete the item.

FURNISH AND INSTALL NEW SIGN AND POST

Sign panel materials shall conform to section 713 of the Colorado Department of Transportation Standard Specifications for Road and Bridge Construction, and to the detail shown on the plans. Layout and font design shall conform to the Manual on Uniform Traffic Control Devices (MUTCD) and in accordance with the construction plans.

Sign panels shall be produced in accordance with the retroreflective sheeting manufacturer's recommendations and conform to Section 713.10 Quality Requirements of Reflective Materials of the Colorado Department of Transportation Standard Specifications for Road and Bridge Construction.

1. Scope of Work

This work shall consist of furnishing all labor, materials and equipment, and incidentals necessary for the construction relating to FURNISH AND INSTALL NEW SIGN AND POST. Remove signs and furnish and install

This work shall consist of furnishing all labor, materials and equipment, and incidentals necessary for the construction relating to FURNISH AND INSTALL NEW SIGN AND POST including, but not limited to install new post anchor sleeve, sign post, bolts, mounting hardware, and installing new signs, including but not limited to, sign panel, retroreflective sign sheeting, bolts, mounting hardware, and appurtenant fittings per the plans and specifications.

2. Method of Measurement and Payment

Payment will be made on a per each basis for FURNISH AND INSTALL NEW SIGN AND POST and shall be full compensation for all work necessary to complete the item.

- END OF SECTION -

Agency: LouisvilleProject Number: 301312-660012Date: February 2025Project Name: 2025 Street Resurfacing

MGPEC
Form # 9 (2003)

Mixture Design Requirements for
Hot Mix Asphalt Pavements (HMAP)

Project Special Provision Sheet for Hot Mix Asphalt Pavements (HMAP)

This MGPEC Form #9 is a **mandatory part of the bid documents**, and * shall be filled out by the AGENCY for each mix specified. The Contractor shall include a copy of this form with each Mix Design submittal after the contract is awarded.

* Street Classification: Cold Mill Patch (1.5"), (2")
(examples: Residential, Collector, Arterial, Industrial, Parking Lot)

* Construction Application: ☐ Top Lift ☐ Intermediate Lift(s) ☒ Bottom Lift(s)
☒ Patching ☐ Other _____

* Aggregate Gradation: ☒ Grading SX ☐ Grading S ☐ Grading SG
Top Lift only when < 2" thick lift Any Lift only when 2" to 3" thick lifts Bottom Lifts only when 3" to 4" thick lifts

* RAP Quantity, Maximum: ☐ 0% ☒ 20%

* Mix Design Method & Compaction Level: Choose Lab Compaction Level (N_{design} =) from Traffic Level

Superpave Gyratory, N_{design} (See Table 9.3.2)

☐ N_{design} = 50 ♦ new category (new 2001 Traffic Category Level 0: Paths & non-Vehicular)

☒ N_{design} = 75 ♦ N =68 (Traffic Level 1, Traffic Loading: 0 to <300,000 ESALs)
♦ N =76 (Traffic Level 2, Traffic Loading: 300,000 to <1 Million ESALs)
♦ N =86 (Traffic Level 3, Traffic Loading: 1 Million to <3 Million ESALs)

☐ N_{design} = 100 ♦ N =96 (Traffic Level 4, Traffic Loading: 3 Million to <10 Million ESALs)
♦ N =109 (Traffic Level 5, Traffic Loading: 10 Million to <30 Million ESALs)

* Asphalt Binder: ☐ PG 58-28 (For Traffic Levels 1, 2 or 3) ⇒ help reduce low temperature cracks
☒ PG 64-22 (For Traffic Levels 3, 4 or 5) ⇒ for higher axle load traffic
☐ PG 76-28 (For Traffic Levels 3, 4 or 5) ⇒ for high priority roads, high axle loads, slow moving or stop & go traffic flow conditions)

* Target Job Mix Optimum Asphalt Content Selection (see 4-8-03 advisory):

☐ **Standard = Choose Target Optimum %AC at 3.5% to 4.5% Air Voids** (per MGPEC 2001 version & CDOT 2001~2002). **Also, all mix design VMA requirements of Table 9.2.1.3 are reduced by 0.3%**

☐ **CDOT Modification = Choose Target Optimum %AC at Air Voids of 1.0% below Optimum established in Standard Method above.** (Procedure per CDOT Revision to Section 403, June 6, 2002). **VMA as above. Field Air Voids to be MINIMUM 3.0%. Bid Price to include all Asphalt Cement.**

A completed MGPEC Form #9 shall supplement the MGPEC Construction Specifications defining the contract specific requirements of Item 9: Hot Mix Asphalt Pavement (HMAP). Refer to the Specifications for details.

Agency: LouisvilleProject Number: 301312-660012Date: February 2025Project Name: 2025 Street Resurfacing

MGPEC
Form # 9 (2003)

Mixture Design Requirements for
Hot Mix Asphalt Pavements (HMAP)

Project Special Provision Sheet for Hot Mix Asphalt Pavements (HMAP)

This MGPEC Form #9 is a **mandatory part of the bid documents**, and * shall be filled out by the AGENCY for each mix specified. The Contractor shall include a copy of this form with each Mix Design submittal after the contract is awarded.

* Street Classification: Cold Mill Patch (18" W x 3" D), (18" W x 4" D)
(examples: Residential, Collector, Arterial, Industrial, Parking Lot)

* Construction Application: ☐ Top Lift ☐ Intermediate Lift(s) ☒ Bottom Lift(s)
☒ Patching ☐ Other _____

* Aggregate Gradation: ☒ Grading SX ☐ Grading S ☐ Grading SG
Top Lift only when < 2" thick lift Any Lift only when 2" to 3" thick lifts Bottom Lifts only when 3" to 4" thick lifts

* RAP Quantity, Maximum: ☐ 0% ☒ 20%

* Mix Design Method & Compaction Level: Choose Lab Compaction Level (N_{design} =) from Traffic Level

Superpave Gyratory, N_{design} (See Table 9.3.2)

☐ N_{design} = 50 ♦ new category (new 2001 Traffic Category Level 0: Paths & non-Vehicular)

☒ N_{design} = 75 ♦ N =68 (Traffic Level 1, Traffic Loading: 0 to <300,000 ESALs)
♦ N =76 (Traffic Level 2, Traffic Loading: 300,000 to <1 Million ESALs)
♦ N =86 (Traffic Level 3, Traffic Loading: 1 Million to <3 Million ESALs)

☐ N_{design} = 100 ♦ N =96 (Traffic Level 4, Traffic Loading: 3 Million to <10 Million ESALs)
♦ N =109 (Traffic Level 5, Traffic Loading: 10 Million to <30 Million ESALs)

* Asphalt Binder: ☐ PG 58-28 (For Traffic Levels 1, 2 or 3) ⇒ help reduce low temperature cracks
☒ PG 64-22 (For Traffic Levels 3, 4 or 5) ⇒ for higher axle load traffic
☐ PG 76-28 (For Traffic Levels 3, 4 or 5) ⇒ for high priority roads, high axle loads, slow moving or stop & go traffic flow conditions)

* Target Job Mix Optimum Asphalt Content Selection (see 4-8-03 advisory):

☐ **Standard = Choose Target Optimum %AC at 3.5% to 4.5% Air Voids** (per MGPEC 2001 version & CDOT 2001~2002). **Also, all mix design VMA requirements of Table 9.2.1.3 are reduced by 0.3%**

☐ **CDOT Modification = Choose Target Optimum %AC at Air Voids of 1.0% below Optimum established in Standard Method above.** (Procedure per CDOT Revision to Section 403, June 6, 2002). **VMA as above. Field Air Voids to be MINIMUM 3.0%. Bid Price to include all Asphalt Cement.**

A completed MGPEC Form #9 shall supplement the MGPEC Construction Specifications defining the contract specific requirements of Item 9: Hot Mix Asphalt Pavement (HMAP). Refer to the Specifications for details.

Agency: LouisvilleProject Number: 301312-660012Date: February 2025Project Name: 2025 Street Resurfacing

MGPEC
Form # 9 (2003)

Mixture Design Requirements for
Hot Mix Asphalt Pavements (HMAP)

Project Special Provision Sheet for Hot Mix Asphalt Pavements (HMAP)

This MGPEC Form #9 is a **mandatory part of the bid documents**, and * shall be filled out by the AGENCY for each mix specified. The Contractor shall include a copy of this form with each Mix Design submittal after the contract is awarded.

* Street Classification: Hot Asphalt Pavement Grade S (2.5),(4.5")
(examples: Residential, Collector, Arterial, Industrial, Parking Lot)

* Construction Application: ☐ Top Lift ☐ Intermediate Lift(s) ☒ Bottom Lift(s)
☐ Patching ☐ Other _____

* Aggregate Gradation: ☐ Grading SX ☒ Grading S ☐ Grading SG
Top Lift only when < 2" thick lift Any Lift only when 2" to 3" thick lifts Bottom Lifts only when 3" to 4" thick lifts

* RAP Quantity, Maximum: ☐ 0% ☒ 20%

* Mix Design Method & Compaction Level: Choose Lab Compaction Level ($N_{design} =$) from Traffic Level

Superpave Gyrotory, N_{design} (See Table 9.3.2)

☐ $N_{design} = 50$ ♦ new category (new 2001 Traffic Category Level 0: Paths & non-Vehicular)

☒ $N_{design} = 75$ ♦ $N=68$ (Traffic Level 1, Traffic Loading: 0 to <300,000 ESALs)
♦ $N=76$ (Traffic Level 2, Traffic Loading: 300,000 to <1 Million ESALs)
♦ $N=86$ (Traffic Level 3, Traffic Loading: 1 Million to <3 Million ESALs)

☐ $N_{design} = 100$ ♦ $N=96$ (Traffic Level 4, Traffic Loading: 3 Million to <10 Million ESALs)
♦ $N=109$ (Traffic Level 5, Traffic Loading: 10 Million to <30 Million ESALs)

* Asphalt Binder: ☐ PG 58-28 (For Traffic Levels 1, 2 or 3) ⇒ help reduce low temperature cracks
☒ PG 64-22 (For Traffic Levels 3, 4 or 5) ⇒ for higher axle load traffic
☐ PG 76-28 (For Traffic Levels 3, 4 or 5) ⇒ for high priority roads, high axle loads, slow moving or stop & go traffic flow conditions)

* Target Job Mix Optimum Asphalt Content Selection (see 4-8-03 advisory):

☐ **Standard = Choose Target Optimum %AC at 3.5% to 4.5% Air Voids** (per MGPEC 2001 version & CDOT 2001~2002). **Also, all mix design VMA requirements of Table 9.2.1.3 are reduced by 0.3%**

☐ **CDOT Modification = Choose Target Optimum %AC at Air Voids of 1.0% below Optimum established in Standard Method above.** (Procedure per CDOT Revision to Section 403, June 6, 2002). **VMA as above. Field Air Voids to be MINIMUM 3.0%. Bid Price to include all Asphalt Cement.**

A completed MGPEC Form #9 shall supplement the MGPEC Construction Specifications defining the contract specific requirements of Item 9: Hot Mix Asphalt Pavement (HMAP). Refer to the Specifications for details.

Agency: LouisvilleProject Number: 301312-660012Date: February 2025Project Name: 2025 Street Resurfacing**MGPEC
Form # 9 (2003)****Mixture Design Requirements for
Hot Mix Asphalt Pavements (HMAP)****Project Special Provision Sheet for Hot Mix Asphalt Pavements (HMAP)**

This MGPEC Form #9 is a **mandatory part of the bid documents**, and * shall be filled out by the AGENCY for each mix specified. The Contractor shall include a copy of this form with each Mix Design submittal after the contract is awarded.

* Street Classification: Hot Asphalt Pavement Grade SX (1.5" Overlay)
(examples: Residential, Collector, Arterial, Industrial, Parking Lot)

* Construction Application: ☒ Top Lift ☐ Intermediate Lift(s) ☐ Bottom Lift(s)
☐ Patching ☐ Other _____

* Aggregate Gradation: ☒ Grading SX ☐ Grading S ☐ Grading SG
Top Lift only when ☐ Any Lift only when ☐ Bottom Lifts only when
< 2" thick lift 2" to 3" thick lifts 3" to 4" thick lifts

* RAP Quantity, Maximum: ☒ 0% ☐ 20%

* Mix Design Method & Compaction Level: Choose Lab Compaction Level ($N_{design} =$) from Traffic Level

Superpave Gyratory, N_{design} (See Table 9.3.2)

☐ $N_{design} = 50$ ♦ new category (new 2001 Traffic Category Level 0: Paths & non-Vehicular)

☒ $N_{design} = 75$ ♦ $N=68$ (Traffic Level 1, Traffic Loading: 0 to <300,000 ESALs)
♦ $N=76$ (Traffic Level 2, Traffic Loading: 300,000 to <1 Million ESALs)
♦ $N=86$ (Traffic Level 3, Traffic Loading: 1 Million to <3 Million ESALs)

☐ $N_{design} = 100$ ♦ $N=96$ (Traffic Level 4, Traffic Loading: 3 Million to <10 Million ESALs)
♦ $N=109$ (Traffic Level 5, Traffic Loading: 10 Million to <30 Million ESALs)

* Asphalt Binder: ☐ PG 58-28 (For Traffic Levels 1, 2 or 3) ⇒ help reduce low temperature cracks
☒ PG 64-22 (For Traffic Levels 3, 4 or 5) ⇒ for higher axle load traffic
☐ PG 76-28 (For Traffic Levels 3, 4 or 5) ⇒ for high priority roads, high axle loads, slow moving or stop & go traffic flow conditions)

* Target Job Mix Optimum Asphalt Content Selection (see 4-8-03 advisory):

- ☐ **Standard = Choose Target Optimum %AC at 3.5% to 4.5% Air Voids** (per MGPEC 2001 version & CDOT 2001~2002). **Also, all mix design VMA requirements of Table 9.2.1.3 are reduced by 0.3%**
- ☐ **CDOT Modification = Choose Target Optimum %AC at Air Voids of 1.0% below Optimum established in Standard Method above.** (Procedure per CDOT Revision to Section 403, June 6, 2002). **VMA as above. Field Air Voids to be MINIMUM 3.0%. Bid Price to include all Asphalt Cement.**

A completed MGPEC Form #9 shall supplement the MGPEC Construction Specifications defining the contract specific requirements of Item 9: Hot Mix Asphalt Pavement (HMAP). Refer to the Specifications for details.

Agency: Louisville

Project Number: 301312-660012

Date: February 2025

Project Name: 2025 Street Resurfacing

Agency: LouisvilleProject Number: 301312-660012Date: February 2025Project Name: 2025 Street Resurfacing**MGPEC
Form # 9 (2003)****Mixture Design Requirements for
Hot Mix Asphalt Pavements (HMAP)****Project Special Provision Sheet for Hot Mix Asphalt Pavements (HMAP)**

This MGPEC Form #9 is a **mandatory part of the bid documents**, and * shall be filled out by the AGENCY for each mix specified. The Contractor shall include a copy of this form with each Mix Design submittal after the contract is awarded.

* Street Classification: Hot Asphalt Pavement Grade SX (1.5")
(examples: Residential, Collector, Arterial, Industrial, Parking Lot)

* Construction Application: ☒ Top Lift ☐ Intermediate Lift(s) ☐ Bottom Lift(s)
☐ Patching ☐ Other _____

* Aggregate Gradation: ☒ Grading SX ☐ Grading S ☐ Grading SG
Top Lift only when $< 2''$ thick lift Any Lift only when $2''$ to $3''$ thick lifts Bottom Lifts only when $3''$ to $4''$ thick lifts

* RAP Quantity, Maximum: ☒ 0% ☐ 20%

* Mix Design Method & Compaction Level: Choose Lab Compaction Level ($N_{\text{design}} =$) from Traffic Level

Superpave Gyratory, N_{design} (See Table 9.3.2)

☐ $N_{\text{design}} = 50$ ♦ new category (new 2001 Traffic Category Level 0: Paths & non-Vehicular)

☒ $N_{\text{design}} = 75$ ♦ $N=68$ (Traffic Level 1, Traffic Loading: 0 to <300,000 ESALs)
♦ $N=76$ (Traffic Level 2, Traffic Loading: 300,000 to <1 Million ESALs)
♦ $N=86$ (Traffic Level 3, Traffic Loading: 1 Million to <3 Million ESALs)

☐ $N_{\text{design}} = 100$ ♦ $N=96$ (Traffic Level 4, Traffic Loading: 3 Million to <10 Million ESALs)
♦ $N=109$ (Traffic Level 5, Traffic Loading: 10 Million to <30 Million ESALs)

* Asphalt Binder: ☐ PG 58-28 (For Traffic Levels 1, 2 or 3) $\Rightarrow$ help reduce low temperature cracks
☒ PG 64-22 (For Traffic Levels 3, 4 or 5) $\Rightarrow$ for higher axle load traffic
☐ PG 76-28 (For Traffic Levels 3, 4 or 5) $\Rightarrow$ for high priority roads, high axle loads, slow moving or stop & go traffic flow conditions)

* Target Job Mix Optimum Asphalt Content Selection (see 4-8-03 advisory):

☐ **Standard = Choose Target Optimum %AC at 3.5% to 4.5% Air Voids** (per MGPEC 2001 version & CDOT 2001~2002). **Also, all mix design VMA requirements of Table 9.2.1.3 are reduced by 0.3%**

☐ **CDOT Modification = Choose Target Optimum %AC at Air Voids of 1.0% below Optimum established in Standard Method above.** (Procedure per CDOT Revision to Section 403, June 6, 2002). **VMA as above. Field Air Voids to be MINIMUM 3.0%. Bid Price to include all Asphalt Cement.**

A completed MGPEC Form #9 shall supplement the MGPEC Construction Specifications defining the contract specific requirements of Item 9: Hot Mix Asphalt Pavement (HMAP). Refer to the Specifications for details.

Agency: LouisvilleProject Number: 301312-660012Date: February 2025Project Name: 2025 Street Resurfacing

MGPEC Form # 9 (2003)

Mixture Design Requirements for Hot Mix Asphalt Pavements (HMAP)

Project Special Provision Sheet for Hot Mix Asphalt Pavements (HMAP)

This MGPEC Form #9 is a **mandatory part of the bid documents**, and * shall be filled out by the AGENCY for each mix specified. The Contractor shall include a copy of this form with each Mix Design submittal after the contract is awarded.

* Street Classification: Leveler Course
(examples: Residential, Collector, Arterial, Industrial, Parking Lot)

* Construction Application: ☐ Top Lift ☐ Intermediate Lift(s) ☐ Bottom Lift(s)
☐ Patching ☒ Other Leveler Course

* Aggregate Gradation: ☒ Grading SX ☐ Grading S ☐ Grading SG
Top Lift only when < 2" thick lift Any Lift only when 2" to 3" thick lifts Bottom Lifts only when 3" to 4" thick lifts

* RAP Quantity, Maximum: ☐ 0% ☒ 20%

* Mix Design Method & Compaction Level: Choose Lab Compaction Level (N_{design} =) from Traffic Level

Superpave Gyratory, N_{design} (See Table 9.3.2)

☐ N_{design} = 50 ♦ new category (new 2001 Traffic Category Level 0: Paths & non-Vehicular)

☐ N_{design} = 75 ♦ N =68 (Traffic Level 1, Traffic Loading: 0 to <300,000 ESALs)
♦ N =76 (Traffic Level 2, Traffic Loading: 300,000 to <1 Million ESALs)
♦ N =86 (Traffic Level 3, Traffic Loading: 1 Million to <3 Million ESALs)

☒ N_{design} = 100 ♦ N =96 (Traffic Level 4, Traffic Loading: 3 Million to <10 Million ESALs)
♦ N =109 (Traffic Level 5, Traffic Loading: 10 Million to <30 Million ESALs)

* Asphalt Binder: ☐ PG 58-28 (For Traffic Levels 1, 2 or 3) ⇒ help reduce low temperature cracks
☒ PG 64-22 (For Traffic Levels 3, 4 or 5) ⇒ for higher axle load traffic
☐ PG 76-28 (For Traffic Levels 3, 4 or 5) ⇒ for high priority roads, high axle loads, slow moving or stop & go traffic flow conditions)

* Target Job Mix Optimum Asphalt Content Selection (see 4-8-03 advisory):

☐ **Standard = Choose Target Optimum %AC at 3.5% to 4.5% Air Voids** (per MGPEC 2001 version & CDOT 2001~2002). **Also, all mix design VMA requirements of Table 9.2.1.3 are reduced by 0.3%**

☐ **CDOT Modification = Choose Target Optimum %AC at Air Voids of 1.0% below Optimum established in Standard Method above.** (Procedure per CDOT Revision to Section 403, June 6, 2002). **VMA as above. Field Air Voids to be MINIMUM 3.0%. Bid Price to include all Asphalt Cement.**

A completed MGPEC Form #9 shall supplement the MGPEC Construction Specifications defining the contract specific requirements of Item 9: Hot Mix Asphalt Pavement (HMAP). Refer to the Specifications for details.

Agency: LouisvilleProject Number: 301312-660012Date: February 2025Project Name: 2025 Street Resurfacing**MGPEC
Form # 9 (2003)****Mixture Design Requirements for
Hot Mix Asphalt Pavements (HMAP)****Project Special Provision Sheet for Hot Mix Asphalt Pavements (HMAP)**

This MGPEC Form #9 is a **mandatory part of the bid documents**, and * shall be filled out by the AGENCY for each mix specified. The Contractor shall include a copy of this form with each Mix Design submittal after the contract is awarded.

* Street Classification: Hot Asphalt Patching Grade SX (4"),(6")
(examples: Residential, Collector, Arterial, Industrial, Parking Lot)

* Construction Application: ☐ Top Lift ☐ Intermediate Lift(s) ☐ Bottom Lift(s)
☒ Patching ☐ Other _____

* Aggregate Gradation: ☒ Grading SX ☐ Grading S ☐ Grading SG
Top Lift only when ☐ Any Lift only when ☐ Bottom Lifts only when
< 2" thick lift 2" to 3" thick lifts 3" to 4" thick lifts

* RAP Quantity, Maximum: ☐ 0% ☒ 20%

* Mix Design Method & Compaction Level: Choose Lab Compaction Level (N_{design} =) from Traffic Level

Superpave Gyratory, N_{design} (See Table 9.3.2)

☐ N_{design} = 50 ♦ new category (new 2001 Traffic Category Level 0: Paths & non-Vehicular)

☒ N_{design} = 75 ♦ N =68 (Traffic Level 1, Traffic Loading: 0 to <300,000 ESALs)
♦ N =76 (Traffic Level 2, Traffic Loading: 300,000 to <1 Million ESALs)
♦ N =86 (Traffic Level 3, Traffic Loading: 1 Million to <3 Million ESALs)

☐ N_{design} = 100 ♦ N =96 (Traffic Level 4, Traffic Loading: 3 Million to <10 Million ESALs)
♦ N =109 (Traffic Level 5, Traffic Loading: 10 Million to <30 Million ESALs)

* Asphalt Binder: ☐ PG 58-28 (For Traffic Levels 1, 2 or 3)⇒ help reduce low temperature cracks
☒ PG 64-22 (For Traffic Levels 3, 4 or 5) ⇒ for higher axle load traffic
☐ PG 76-28 (For Traffic Levels 3, 4 or 5) ⇒ for high priority roads, high axle loads, slow moving or stop & go traffic flow conditions)

* Target Job Mix Optimum Asphalt Content Selection (see 4-8-03 advisory):

☐ **Standard = Choose Target Optimum %AC at 3.5% to 4.5% Air Voids** (per MGPEC 2001 version & CDOT 2001~2002). **Also, all mix design VMA requirements of Table 9.2.1.3 are reduced by 0.3%**

☐ **CDOT Modification = Choose Target Optimum %AC at Air Voids of 1.0% below Optimum established in Standard Method above.** (Procedure per CDOT Revision to Section 403, June 6, 2002). **VMA as above. Field Air Voids to be MINIMUM 3.0%. Bid Price to include all Asphalt Cement.**

A completed MGPEC Form #9 shall supplement the MGPEC Construction Specifications defining the contract specific requirements of Item 9: Hot Mix Asphalt Pavement (HMAP). Refer to the Specifications for details.

MGPEC
Form # 9 (2003)

Mixture Design Requirements for
Hot Mix Asphalt Pavements (HMAP)

Project Special Provision Sheet for Hot Mix Asphalt Pavements (HMAP)

This MGPEC Form #9 is a **mandatory part of the bid documents**, and * shall be filled out by the AGENCY for each mix specified. The Contractor shall include a copy of this form with each Mix Design submittal after the contract is awarded.

* Street Classification: Hot Asphalt Pavement Grade S (4")
(examples: Residential, Collector, Arterial, Industrial, Parking Lot)

* Construction Application: ☒ Top Lift ☐ Intermediate Lift(s) ☒ Bottom Lift(s)
☐ Patching ☐ Other _____

* Aggregate Gradation: ☐ Grading SX ☒ Grading S ☐ Grading SG
Top Lift only when ☐ Any Lift only when ☐ Bottom Lifts only when
< 2" thick lift 2" to 3" thick lifts 3" to 4" thick lifts

* RAP Quantity, Maximum: ☒ 0% ☐ 20%

* Mix Design Method & Compaction Level: Choose Lab Compaction Level (N_{design}) from Traffic Level

Superpave Gyratory, N_{design} (See Table 9.3.2)

☐ N_{design} = 50 ♦ new category (new 2001 Traffic Category Level 0: Paths & non-Vehicular)

☒ N_{design} = 75 ♦ N =68 (Traffic Level 1, Traffic Loading: 0 to <300,000 ESALs)
♦ N =76 (Traffic Level 2, Traffic Loading: 300,000 to <1 Million ESALs)
♦ N =86 (Traffic Level 3, Traffic Loading: 1 Million to <3 Million ESALs)

☐ N_{design} = 100 ♦ N =96 (Traffic Level 4, Traffic Loading: 3 Million to <10 Million ESALs)
♦ N =109 (Traffic Level 5, Traffic Loading: 10 Million to <30 Million ESALs)

* Asphalt Binder: ☐ PG 58-28 (For Traffic Levels 1, 2 or 3) ⇒ help reduce low temperature cracks
☒ PG 64-22 (For Traffic Levels 3, 4 or 5) ⇒ for higher axle load traffic
☐ PG 76-28 (For Traffic Levels 3, 4 or 5) ⇒ for high priority roads, high axle loads, slow moving or stop & go traffic flow conditions)

* Target Job Mix Optimum Asphalt Content Selection (see 4-8-03 advisory):

☐ **Standard = Choose Target Optimum %AC at 3.5% to 4.5% Air Voids** (per MGPEC 2001 version & CDOT 2001~2002). **Also, all mix design VMA requirements of Table 9.2.1.3 are reduced by 0.3%**

☐ **CDOT Modification = Choose Target Optimum %AC at Air Voids of 1.0% below Optimum established in Standard Method above.** (Procedure per CDOT Revision to Section 403, June 6, 2002). **VMA as above. Field Air Voids to be MINIMUM 3.0%. Bid Price to include all Asphalt Cement.**

A completed MGPEC Form #9 shall supplement the MGPEC Construction Specifications defining the contract specific requirements of Item 9: Hot Mix Asphalt Pavement (HMAP). Refer to the Specifications for details.

SECTION 02580 - PAVEMENT MARKING

TECHNICAL SPECIFICATIONS

- 1.0 SCOPE OF WORK
- 2.0 MATERIALS
- 3.0 EXECUTION OF WORK
- 4.0 MEASUREMENT OF PAYMENT
- 5.0 BASIS OF PAYMENT

1.0 SCOPE OF WORK

This work consists of furnishing and applying pavement marking, and furnishing, installing, and removing temporary pavement marking in accordance with these specifications, Standard Specifications for Road and Bridge Construction Section 627, the Manual on Uniform Traffic Control Devices for Streets (MUTCD), the Colorado supplement thereto, and in conformity to the lines, dimensions, patterns, locations, and details shown on the plans or established.

2.0 MATERIALS

2.1 Glass Beads for Traffic Markings. Glass beads for traffic paint shall conform to AASHTO M247, Type 1 or Type 2, non-floatation grade.

Glass beads for Thermoplastic Pavement Marking and Epoxy Pavement Marking shall conform to AASHTO M247, Type 1. Glass beads for epoxy pavement marking shall be silicon treated to meet the requirements of AASHTO M247.

2.2 Epoxy Pavement Marking Material. Only epoxy pavement marking material that is on the CDOT's Approved Products List may be used.atches or lots of approved products will be accepted on the project by certified test report (CTR). The CTR shall confirm that the material meets all CDOT requirements and is the same material that was preapproved in the product evaluation process.

2.2.1 Formulation. Epoxy pavement marking material shall be a two component, 100 percent solids, material formulated to provide simple volumetric mixing ratio of two volumes of component A and one volume of component B unless otherwise recommended by the material manufacturer.

2.2.2 Composition. The component A of both white and yellow shall be within the following limits:

	White	Yellow
Pigments	Min % by weight 18% Titanium Dioxide, (ASTM D 476, Type II)	% by weight 21-27%
Epoxy Resin	75-82%	73-79%

The pigment for yellow epoxy shall contain no lead or other material such that the cured epoxy could be considered a hazard waste under EPA or CDPHE regulations. CONTRACTOR shall submit to ENGINEER a manufacturer's certification of compliance with this requirement.

2.2.3 Epoxide Number. The epoxy number of the epoxy resin shall be 0.38 ± 0.05 as determined by ASTM D1652 for white and yellow component A on pigment free basis.

2.2.4 Amine Number. The amine number on the curing agent (component B) shall be 410 ± 50 per ASTM D2071.

- 2.2.5 *Toxicity.* Upon heating to application temperature, the material shall not produce fumes which are toxic or injurious to persons or property.
- 2.2.6 *Color and Weather Resistance.* The mixed epoxy compound, both white and yellow, when applied to 3 inch x 6 inch aluminum panels at $15 \pm \frac{1}{2}$ mils of thickness with no glass beads and exposed in the Q.U.V. Environmental Testing Chamber as described in ASTM G154, shall conform to the following minimum requirements. (The test shall be conducted for 75 hours at 122° F, 4 hours humidity, and 4 hours U.V., in alternating cycles. The prepared panels shall be cured at 77° F for 72 hours prior to exposure.) The color of the white epoxy system shall not be darker than Federal Standard No. 595B-17778. The color of the yellow epoxy system shall conform to Federal Standard No. 595B-13538. The gloss values of both samples shall not be less than 70° after the test.
- 2.2.7 *Drying Time.* The epoxy pavement marking material shall have a setting time to a no-tracking condition of not more than 25 minutes at a temperature of 73° F and above.
- 2.2.8 *Curing.* The epoxy material shall be capable of fully curing under the constant surface temperature condition of 25° F and above.
- 2.2.9 *Adhesion to Concrete.* The catalyzed epoxy pavement marking material, when tested according to ACI Method 503, shall have such a high degree of adhesion to the specified (4000 psi minimum) concrete surface that there shall be a 100 percent concrete failure in the performance of this test.
- 2.2.10 *Hardness.* The epoxy pavement marking materials, when tested according to ASTM D2240, shall have a Shore D Hardness between 75 and 100. Samples shall be allowed to cure at room temperature, $75 \pm 2^\circ$ F for minimum of 12 hours and a maximum of 48 hours prior to performing the indicated test.
- 2.2.11 *Abrasion Resistance.* The abrasion resistance shall be evaluated on Taber Abrader with a 1000 gram load and CS-17 wheels. The duration of the test shall be 1000 cycles. The wear index shall be calculated based on ASTM test method C501 and the wear index for the catalyzed material shall not be more than 70. The tests shall be run on cured samples of material which have been applied at film thickness of $15 \pm \frac{1}{2}$ mils to code S-16 stainless steel plates. The samples shall be allowed to cure at $75 \pm 2^\circ$ F for a minimum of 12 hours and a maximum of 48 hours prior to performing the indicated tests.
- 2.2.12 *Tensile Strength.* When tested according to ASTM D638, the epoxy pavement marking materials shall have a tensile strength of not less than 6000 psi. The Type IV Specimens shall be cast in a suitable mold and pulled at the rate of $\frac{1}{4}$ " per minute by a suitable dynamic testing machine. The samples shall be allowed to cure at room temperature ($75 \pm 2^\circ$ F) for a minimum of 12 hours and a maximum of 48 hours prior to performing the indicated tests.
- 2.2.13 *Compressive Strength.* When tested according to ASTM D695, the catalyzed epoxy pavement marking materials shall have a compressive strength of not less than 12,000 psi. The cast sample shall be conditioned at room temperature, $75 \pm 2^\circ$ F for minimum of 12 hours and a maximum of 48 hours prior to performing the indicated test. The rate of compression of these samples shall be no more than $\frac{1}{4}$ inch per minute.

2.3 Thermoplastic Marking Material. Thermoplastic marking material shall conform to AASHTO M249 except for the following:

- 2.3.1 In paragraph 3.1.2 of the AASHTO specifications, delete the first two sentences and replace with the following:

The material manufacturer shall have the option of formulating the material according to its own specifications. However, the binder shall be composed of alkyd resins wherein a minimum of 70 percent (by weight) of the binder shall be maleic modified glycerol ester of rosin. The physical and chemical properties contained in this specification shall apply regardless of the type of formulation used.

- 2.3.2 In paragraph 4.3 of the AASHTO specifications, add the following physical characteristics:

The infra-red spectra of the extracted binder will be compared to the characteristic absorption bands of maleic modified glycerol ester of rosin.

- 2.3.3 In paragraph 6.1 of the AASHTO specifications, delete the second sentence and replace with the following:

The containers of thermoplastic material shall weigh approximately 50 pounds.

2.4 Preformed Thermoplastic Material

- 2.4.1 General – Material must be composed of an ester modified rosin resistant to degradation by motor fuels, lubricants, etc. in conjunction with aggregates, pigments, binders, and glass beads which have been factory produced as a finished product and meets the requirements of the current edition of the MUTCD. The thermoplastic material conforms to AASHTO M249 with the exception of the relevant differences due to the fact that the material is supplied in a preformed state.

- 2.4.2 Physical Requirements:

Graded Glass Beads –

The material shall contain a minimum of 30% graded glass beads by weight. The intermixed beads shall be conforming to AASHTO M247, with minimum 80% true spheres and minimum refractive index shall of 1.50.

The material must have factory applied coated surface beads in addition to the intermixed beads at a rate of 1 lb. ($\pm 10\%$) per sq. ft. The factory applied coated surface beads shall have a minimum of 80% true spheres, minimum refractive index of 1.50, and meet the following gradation.

Size Gradation			
US Mesh	µm	Retained, %	Passing, %
12	1700	0-2%	98-100%
14	1400	0-3.5%	96.5-100%
16	1180	2-25%	75-98%
18	1000	28-63%	37-72%
20	850	63-72%	28-37%
30	600	67-77%	23-33%
50	300	89-95	5-11%
80	200	597-100%	0-3%

Pigments –

White: The material shall be manufactured with sufficient titanium dioxide pigment to meet FHWA Docket No. FHWA-99-Table 5 and Table 6 as revised and corrected.

Red, Blue, Yellow: The material shall be manufactured with sufficient titanium dioxide pigment to meet FHWA Docket No. FHWA-99-Table 5 and Table 6 as revised and corrected. The yellow pigment must be organic and must be heavy-metal free.

Red Thermo plastic pavement marking.

Green Thermo plastic pavement marking.

Heating indicators – The top surface of the material (same side as the factory applied surface beads) shall have regularly spaced indents. The closing of these indents during application shall act as a visual cue that the material has reached a molten state allowing for satisfactory adhesion and proper bead embedment, and as a post-application visual cue that the application procedures have been followed.

Skid Resistance – The surface with properly applied and embedded surface beads must provide a minimum resistance value of 45 BPN when tested according to ASTM E303.

Thickness - The material shall be supplied at a minimum thickness of 125 mils.

Environmental Resistance - The preformed thermoplastic material shall be resistant to deterioration due to exposure to sunlight, water, oil, gasoline, salt, and adverse weather conditions.

Retroreflectivity – The material, when applied in accordance with manufacturer's guidelines, must demonstrate a uniform level of sufficient nighttime retroreflection when tested in accordance to ASTM E710. The applied material must have an initial minimum intensity reading of $500 \text{ mcd} \cdot \text{m}^{-2} \cdot \text{lx}^{-1}$ for yellow as measured with a Delta pavement marking retroreflectometer.

Note: Initial retroreflection is affected by the amount of heat applied during installation, initial retroreflection levels may be affected.

3.0 EXECUTION OF WORK

3.1 GENERAL

All pavement marking shall be placed in accordance with the following requirements. When the term “full compliance” is used, it means the pavement markings shall meet the requirements of these documents.

3.1.1 Temporary pavement markings and control points for the installation of those pavement markings for roadways that are being constructed under traffic shall be as follows:

3.1.1.1 Markings applied to a final surface shall not leave a scar that conflicts with permanent markings.

3.1.1.2 The following criteria apply to all construction on roadways open to traffic other than 3.1.1.1 above.

Control points, 4-inch by 1-foot marks at 40-foot intervals, are guide markers for the installation of temporary markings, full compliance markings, or both and will not be used as a substitute for temporary markings.

Temporary broken line (lane lines) pavement markings shall be installed and maintained and shall be at least 4-feet long with a maximum gap of 36 feet.

Temporary solid line (channelization) pavement markings shall be installed and maintained and shall be 4-inches wide minimum.

Temporary edge lines are not required unless specified on the plans. Control points for edge lines shall not be established unless full compliance final edge lines are to be placed the same day.

Temporary centerline pavement markings for no-passing zones shall be full compliance and shall be placed daily.

Temporary pavement markings shall be installed according to the manufacturer’s recommendations in such a way that the markings adequately follow the desired alignment.

3.1.2 Control points, temporary pavement markings will not be paid for separately but shall be included in the work.

3.2 TEMPORARY OR PERMANENT PAVEMENT MARKING WITH PAINT

Striping shall be done when the air and pavement temperatures are at least 40° F. The pavement surface and weather conditions shall be conducive to satisfactory results.

Equipment shall be capable of painting a reasonably clean-edged stripe of the designated width $\pm \frac{1}{4}$ -inch and shall have a bead dispenser directly behind, synchronized with the paint applicator. For centerlines and lane lines, an automatic skip control shall be used that will paint a stripe with a gap as shown on the plans. Machines having multiple applicators shall be used for centerlines with "no passing zones". In areas where machines are not practical, suitable hand-operated equipment shall be used. Stripes shall be protected until dry.

Paint and beads shall be applied within the following limits:

	Application Rate or Coverage Per Gallon of Paint	
	MINIMUM	MAXIMUM
Paint:	100 sq. ft.	110 sq. ft.
Beads:	5 lb 13 oz	6 lb 3. oz

3.3 EPOXY PAVEMENT MARKING

The epoxy pavement marking compound shall be applied with equipment that will precisely meter the two components in the ratio given in this section. The equipment shall automatically shut off or warn the operator if one component is not being mixed. The equipment shall produce the required amount of heat at the mixing head and gun tip to provide and maintain the temperatures specified.

Before mixing, the individual components A and B shall each be heated to a temperature of 80° to 140° F. After mixing, the application temperature for the combined material at the gun tip shall be 80° to 140° F. The 140° F upper limit is the maximum temperature under any circumstances.

The surface areas of new Portland cement concrete pavement and decks that are to receive markings shall be sandblasted prior to placement of the epoxy pavement marking. The amount of sandblasting shall be sufficient to remove all dirt, laitance, and curing compound residue.

The surface areas of new asphalt pavement, existing asphalt pavement, and existing concrete pavement that are to receive markings shall be cleaned with a high-pressure air blast to remove loose material prior to placement of the epoxy pavement marking. Should any pavement become dirty, from tracked mud etc. as determined by ENGINEER, it shall be cleaned prior to the placement of the epoxy pavement marking.

When recommended by the epoxy manufacturer, a high-pressure water blast integrated into the gun carriage shall be used to clean the pavement surface prior to epoxy pavement marking application. The water blast shall be followed by a high-pressure air blast to remove all residual water, leaving only a damp surface.

Epoxy pavement marking shall be applied to the road surface according to the epoxy manufacturer's recommended methods at 15 mils minimum thickness. Glass beads shall be applied into the epoxy pavement marking by means of a pressurized bead applicator at a rate of $\frac{1}{4}$ pound per square foot, 25 pounds per gallon minimum.

Epoxy pavement marking and beads shall be applied within the following limits:

	Application Rate or Coverage Per Gallon of Paint	
	MINIMUM	MAXIMUM
15 mil marking:	100 sq. ft.	110 sq. ft.
Beads:	25 lb	

3.4 THERMOPLASTIC PAVEMENT MARKING

- 3.4.1 *Equipment-General.* The material shall be applied to the pavement by an extrusion method wherein one side of the shaping die is the pavement, and the other three sides are contained by, or are part of suitable equipment for heating, mixing, and controlling the flow of the material.

The equipment shall be constructed to provide continuous mixing and agitation of the material. Conveying parts of the equipment between the main material reservoir and the shaping die shall be so constructed as to prevent accumulation and clogging. All parts of the equipment which come in contact with the material shall be easily accessible and exposable for cleaning and maintenance.

All mixing and conveying parts up to and including the shaping die shall maintain the material at the plastic temperature.

The equipment shall be so constructed as to assure continuous uniformity in the dimensions of the stripe. The applicator shall provide a means for cleanly cutting off square stripe ends and shall provide a method of applying "skip" lines. The use of pans, aprons, or similar appliances, which the die overruns will not be permitted under this specification.

Beads for the surface of the completed stripe shall be applied by an automatic bead dispenser attached to the applicator in such manner that the beads are dispensed almost instantly upon the completed line. The bead dispenser shall be equipped with an automatic cutoff control synchronized with the cutoff of the thermoplastic material.

The equipment shall be so constructed as to provide for varying die widths to produce varying widths of traffic markings.

The equipment shall be so designed to permit agitation of the material to prevent scorching, discoloration, or excessive high temperatures of any part of the material.

A special kettle shall be provided for melting and heating the composition. The kettle shall be equipped with an automatic thermostatic control device so that heating can be done by controlled heat transfer liquid rather than direct flame.

The applicator and kettle shall be so equipped and arranged as to satisfy the requirements of the National Fire Underwriters.

The equipment shall be so equipped as to permit preheating of the pavement immediately prior to application of the material.

The applicator shall be mobile and maneuverable to the extent that straight lines can be followed, and normal curves can be made in a true arc.

3.4.2 *Types of Equipment*

Portable Applicator. The portable applicator shall be a device typically used for painting crosswalk lines, stop bars, short lane lines, and short center lines. The applicator shall be easily maneuverable and capable of being propelled by the operator.

Mobile Applicator. The mobile applicator shall contain equipment to provide for automatic installation of skip lines in any combination of line and skip up to 40 feet. The mobile applicator shall be moved in conjunction with the melting and heating kettles in such a manner as to provide continuous highway operation of the kettles and the mobile applicator as an integral unit.

Cleaning Equipment. Equipment must be provided to insure removal of laitance, dust, debris, paint, and other foreign matter from the road surface immediately prior to the installation of the composition or immediately prior to the application of primer.

Application. The strip shall be applied to the pavement either to the right or left of the application unit, dependent upon roadway lane being used. The unit shall not occupy more than one lane of roadway while operating.

The finished lines shall have well defined edges and be free of waviness. All of the equipment necessary to the preheating and application of the material shall be so designed that the temperature of the material can be controlled within the limits necessary to its pour ability for good application.

At the time of installation of thermoplastic materials, the pavement shall be clean, dry, and free of laitance, oil, dirt, grease, paint, or other foreign contaminants. Pavement and ambient temperatures shall be at least 50° F.

To ensure the best possible adhesion, the marking material as specified, shall be installed at the manufacturer's recommended temperature.

The minimum thickness of thermoplastic lines as viewed from a lateral cross section shall be not less than 3/32 inch at the edges, nor less than 1/8-inch at the center. Measurements shall be taken as an average throughout any 36-inch section of the line. The material, when formed into traffic stripes, must be readily renewable by placing an overlay of new material directly over an old line of compatible material. Such new material shall bond itself to the old line in such a manner that no splitting or separation take place.

Glass beads shall be applied to the thermoplastic pavement marking at a rate of 10 lb/100 sq. ft., minimum.

3.5 **PREFORMED THERMOPLASTIC PAVEMENT MARKING**

- 3.5.1 The markings shall consist of a resilient white, yellow, or other color thermoplastic product with glass beads uniformly distributed throughout the entire cross-sectional area. The markings must be resistant to the detrimental effects of motor fuels, lubricants, hydraulic fluids, antifreeze, etc. Legends and symbols shall be capable of being affixed to bituminous pavements by heating.

The markings shall conform to pavement contours, breaks and faults through the action of traffic at normal pavement temperatures. The material shall have resealing characteristics with the capability of fusing with itself and previously applied thermoplastic markings under normal use.

The preformed thermoplastic markings shall be packaged in a protective plastic film with cardboard stiffeners where necessary to prevent damage in transit. The carton in which the material is placed shall be clearly labeled for ease of identification.

- 3.5.2 *Application.* Application temperature shall be as recommended by the manufacturer. The pavement and air temperature shall be as recommended by the manufacturer at the time of application. The materials shall be applied using a heating method recommended by the manufacturer. CONTRACTOR shall provide ENGINEER a copy of the manufacturer's installation recommendations prior to beginning the work. The pavement shall be clean, dry, and free from debris. The preformed thermoplastic markings may be installed on top of existing thermoplastic marking after all loose material has been removed. The preformed thermoplastic markings shall not be installed on top of existing preformed plastic pavement markings without first removing the existing markings to a depth that ensures removal of the adhesive backing of the preformed plastic. It shall not be installed on top of pavement marking paint without first removing the paint.

- 3.5.3 *Equipment.* CONTRACTOR shall use a heating method specifically recommended by the manufacturer for the installation of preformed thermoplastic markings.

3.6 **PAVEMENT MARKING TAPE**

- 3.6.1 Retroreflective tape shall be suitable for temporary use on asphaltic or Portland cement concrete pavements.

The surface to which the tape is applied shall be clean, dry, and free of dirt, oils, and grease. The tape shall be pressed down immediately after application, until it adheres properly and conforms to the surface. Temporary marking tape sections longer than 1-foot shall be removed before placement of the final pavement course. All tape shall be removed on sections where tape conflicts with revised traffic lanes prior to opening of new lanes to traffic.

Pavement marking tape (removable) shall be installed in accordance with the manufacturer's recommendations and maintained throughout the required construction phase at no additional cost to OWNER.

Temporary marking tape shall be removed before installation of full conformance pavement markings.

4.0 MEASUREMENT FOR PAYMENT

- 4.1 The types of pavement marking described herein will be measured by the following units, complete in place and accepted.

Thermoplastic pavement marking and preformed thermoplastic pavement marking will be measured by the square foot. The unmarked spaces between markings will not be included in the overall measurement.

Epoxy Pavement Marking will be measured by the square foot. The unmarked spaces between markings will not be included in the overall measurement.

5.0 BASIS OF PAYMENT

Temporary Pavement Marking tabs, tape, etc. shall be furnished and installed after milling and leveler operations. Temporary Pavement Marking with tabs, tape, etc. shall be removed before installation of full conformance pavement marking and will not be paid for separately but shall be included in the work.

- 5.1 The accepted quantities will be paid for at the contract price per square foot of measurement for:
- THERMOPLASTIC PAVEMENT MARKING (CROSSWALK and STOP BARS)
 - THERMOPLASTIC PAVEMENT MARKING (WORDS and SYMBOLS)
 - EPOXY PAVEMENT MARKING

The Contract Price paid per square foot shall include full compensation for furnishing all labor, materials, tool, equipment, and incidentals and for performing all Work involved in constructing the project, complete in place as specified in the Contract Documents and no additional compensation will be allowed therefore.

- END OF SECTION -

SECTION 02600 - CONSTRUCTION ZONE TRAFFIC CONTROL

PART 1 - GENERAL

1.1 DESCRIPTION

Construction zone traffic control shall apply to any and all construction and related construction on the 2025 Street Resurfacing Project to complete the work.

This work consists of furnishing, installing, moving, maintaining, and removing temporary traffic signs, advance warning arrow panels, variable message boards, flashing portable beacons, barricades, channelizing devices, delineators, and flagging as required by the Manual on Uniform traffic Control Devices and the Colorado Supplement thereto, in accordance with the plans and these specifications. When a device is not in use, CONTRACTOR may remove it from the project for the period it is not needed. Devices temporarily not in use shall not be stored in the roadway or walkways.

1.2 GENERAL REQUIREMENTS

Pertinent provisions of the following listed documents shall apply to this work, except as they may be modified herein, and are hereby made a part of this specification to the extent required.

- A. Standard Specifications for Road and Bridge Construction by the Colorado Department of Transportation (CDOT), Section 630, Construction Zone Traffic Control, and Section 627, Pavement Marking.
- B. Manual on Uniform Traffic Control Devices, FHWA, and the latest revision of the Colorado Supplement thereto.
- C. CDOT Standard Plan S-630-1 (sheets 8 and 9), S-630-2 and S-630-3.

1.3 SUBMITTALS

- A. Five (5) CONTRACT DAYS prior to the start of any construction activity, submit copies of the following:
 - 1. Proposed detour plan and traffic control elements as described under Section 3.2.
 - 2. Schedule of proposed duration and sequence of operations.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. In accordance with CDOT Section 627.02 regarding pavement marking tape.
- B. In accordance with CDOT Section 630.02 regarding signs and barricades.
- C. In accordance with CDOT Section 630.05 regarding traffic cones.

PART 3 - EXECUTION

3.1 GENERAL

In accordance with CDOT, Subsection 630.09 through Subsection 630.13, Construction Zone Traffic Control - Construction Requirements, except as modified herein.

In accordance with CDOT, Section 627.10, Pavement Marking Tape.

3.2 METHOD OF HANDLING TRAFFIC

Delete the second paragraph of Subsection 630.09.

Subsection 630.08 shall include the following:

ALL TRAFFIC CONTROL DEVICES MUST BE IN GOOD AND CLEAR CONDITION, INSTALLED PRIOR TO ALL AND ANY CONSTRUCTION ACTIVITY. ENGINEER MAY DIRECT MINOR MODIFICATIONS TO THE APPROVED TRAFFIC CONTROL PLAN BASED ON OBSERVATIONS OF FIELD CONDITIONS AT ANY TIME OR SUSPEND WORK UNTIL APPLICABLE SAFETY MEASURES ARE TAKEN WITHOUT ANY CHANGES TO THE COST OF THE PROJECT.

DEFICIENCIES IN TRAFFIC CONTROL SHALL BE CORRECTED IMMEDIATELY OR WORK SHALL BE SUSPENDED. OWNER WILL REQUEST A REDUCTION IN COST IF TRAFFIC CONTROL IS NOT PROVIDED PER APPROVED METHOD OF HANDLING TRAFFIC.

In Subsection 630.09, add the following:

The City Engineer must approve all street closures. At least 24 hours before a street closure, it shall be the responsibility of CONTRACTOR to notify the following agencies:

1. Police Department 303-441-4444
2. Louisville Fire Protection District 303-666-8809
3. City of Louisville Operations and Maintenance Department 303-335-4750
4. AMR Ambulance Service 303-665-6623
5. Boulder Valley School District 303-447-1010
6. Boulder County Communications 303-441-4444
7. Regional Transportation District 303-443-0100
8. Republic Trash Service Email the following:
Nick Scharrer nscharrer@republicservices.com
Mike Allarid mallarid@republicservices.com
Blair Van Hoveen blair.vanhoveven@republicservices.com
Susan Roundy sroundy@republicservices.com

In addition to the above agencies and organizations, CONTRACTOR shall notify the Post Office.

At the completion of work, the agencies must be notified of resumption of normal service.

Changes to the approved traffic control plan necessitated by unforeseen circumstances, such as utility conflicts, must be reviewed and authorized by ENGINEER.

CONTRACTOR shall include the cost for purchasing "NO PARKING" signs necessary to restrict parking within the work limits. "NO PARKING" signs shall be placed not less than 24 hours in advance of commencement of work in a work zone. The sign shall state, for example "No Parking 7 a.m. to 7 p.m.", together with the day of the week. **"No Parking" signs shall be removed or turned from traffic on streets where construction activities are postponed for a period of time greater than 48 hours.**

A copy of the Right of Way Permit and the approved MHT shall be available at the project site in order that City personnel may verify compliance with the specified traffic control requirements.

The specified elements of the MHT shall also include the number of flag persons to be used.

Approval of the proposed MHT does not relieve CONTRACTOR of liability specifically assigned to him under the contract. CONTRACTOR shall erect and maintain warning lights, signs, barricades, and sufficient safeguards around all excavations, embankments, and obstructions.

CONTRACTOR shall coordinate and cooperate fully with agents of the City of Louisville, utility owners, and other contractors. He shall also coordinate and cooperate fully with agents of other entities to assure adequate and proper traffic control is provided.

CONTRACTOR is advised that other significant construction might be occurring in the area and that he shall cooperate fully with the City of Louisville and all other contractors occupying public right-of-way in terms of work location, work schedule, and traffic control requirements.

Through traffic shall be carried on a paved surface at all times unless otherwise approved by ENGINEER. CONTRACTOR shall maintain at his own expense that portion of the existing roadway being used to carry traffic so that traffic may readily pass over it.

All traffic control devices supplied by CONTRACTOR must be maintained in good and clear condition and meet minimum national standards for reflectivity. Devices shall comply with minimum size and shape as specified in the MUTCD. **No bent, broken, damaged, defaced, dented, dirty, discolored, faded, non-conforming traffic control devices, and/or supports shall be used in this project.**

All traffic control devices shall bear the name, address, and phone number of the barricade company that owns them. The phone number shall be a 24-hour a day dispatched hotline in the event an emergency situation occurs where additional devices are needed or existing devices must be removed.

CONTRACTOR shall install construction traffic control devices in locations that do not block or impede sidewalks for pedestrians or bicyclists or other existing traffic control devices. This strategy shall include, but is not limited to, strapping signs to streetlight or utility poles. Devices may only be attached to wooden streetlight and utility poles.

All existing traffic control devices, including traffic signs and pavement markings that are compatible with the construction zone traffic control, shall remain visible and fully operational. If any devices are incompatible with the temporary construction traffic control devices, they shall be covered, relocated, or removed.

CONTRACTOR shall not be allowed to begin operations which require traffic control until the setup of traffic control devices is completed. Also, CONTRACTOR shall clear his operations allowing 30 minutes for removals of traffic control devices in accordance with the designated hours of work and roadway closures.

During non-working hours, the roadways shall be restored to safe pre-construction travel conditions for the free flow of traffic. Any maintenance required to restore the roadways to this condition, including pavement patching and grading, shall be done prior to opening the areas to traffic or completing work for the day. Temporary pavement markings shall be placed at the direction of ENGINEER. All costs incidental to the foregoing requirements in this paragraph shall be included in the original contract prices for the project, including any additional traffic control items required for haul routes into or away from the project.

Any existing signs damaged due to CONTRACTOR operations shall be replaced in kind or repaired to the satisfaction of ENGINEER by CONTRACTOR at no cost to the project.

Any existing traffic signs removed or relocated during construction as part of the approved traffic control plan are the responsibility of CONTRACTOR to reset upon completion of construction, unless noted otherwise in the plans or specifications. Existing signs may not be removed without prior approval of ENGINEER.

CONTRACTOR shall not have construction equipment or materials in the lanes open to traffic at any time. Brief lane closures (of 5 minutes or less), as approved by ENGINEER, may be permitted for moving construction equipment. Flaggers will be required for such operations. All personal vehicles and construction equipment parking will be prohibited where it conflicts with safety, access, or flow of traffic.

During non-construction periods (evenings, weekends, holidays, etc.) all work shall be adequately protected to ensure the safety of vehicular and pedestrian traffic, using materials meeting the approval of ENGINEER.

Lane widths in work zones shall be 10 feet, minimum.

The vertical cut or fill, including rotomilling over 1" height differences resulting from construction operations adjacent to traffic lanes shall be temporarily sloped at a 3:1 or flatter slope, or as shown on the typical plan section, and barrier protected, or delineated at 25-foot intervals immediately after grading or removal operations. The 3:1 slope requirement applies to roadway construction projects and would not generally apply to utility construction or rehabilitation projects. Slope or shoring requirements for these type projects shall be reviewed on a project by project basis.

CONTRACTOR shall equip all vehicles operating within the moving lanes with flashing amber lights visible from all directions.

Any portable device that requires weight to prevent overturning shall be weighted with appropriate sized sand bags. Rocks, asphalt, or any other debris will not be permitted.

MAINTENANCE OF ACCESS

CONTRACTOR shall maintain access to parking lots at all times unless otherwise approved by ENGINEER. During non-working hours CONTRACTOR shall maintain access to the roadways and driveways within the construction zone with temporary ramps.

CONTRACTOR shall maintain access for **trash pickup** at all times unless otherwise approved by ENGINEER. During non-working hours CONTRACTOR shall maintain access to the roadways within the construction zone with temporary ramps. CONTRACTOR shall coordinate with residents and the trash pickup company 1-week in advance if access will be restricted. ENGINEER must be notified in writing if trash pickup will be impacted **10-days** in advance.

Protection of Adjacent Property and Drives. CONTRACTOR shall use extra care so as to minimize disruption to adjacent property and drives and shall leave the construction site clean, with all debris and concrete removed. If ENGINEER determines that CONTRACTOR did not exercise reasonable care to protect the parking areas or street sections from unnecessary damage while accomplishing his work, CONTRACTOR will be required to restore the damaged items to their original condition at his own expense. CONTRACTOR will not be permitted to operate trucks and equipment or store equipment and supplies on private property unless he has written permission to do so.

Work Limits. Work limits shall be marked by CONTRACTOR with orange plastic fencing in pedestrian areas and other suitable materials in the street prior to beginning work. He shall confine all work to within these limits except as provided in the contract documents. If work limits are not established by permit or contract documents, said limits shall be determined by ENGINEER and shall be suitably marked by CONTRACTOR prior to beginning work.

Should CONTRACTOR be unable to obtain written approval of property owners or occupants, documentation of a "Good Faith Effort" to obtain said approval must be submitted.

CONTACTS

CONTRACTOR shall notify the following 72 hours prior to beginning construction and 48 hours prior to changing traffic patterns. CONTRACTOR shall also notify these persons in case of an emergency.

City of Louisville Public Works – Mary Hamann, P.E. 726-206-2925
City of Louisville Operations Division – Ben Francisco 303-335-4756
City of Louisville Police Department – Boulder Dispatch 303-441-4444
City of Louisville Fire Department - Fire Marshal 303-666-8809

3.3 TRAFFIC CONTROL MANAGEMENT

Subsection 630.10(6) shall include the following: A day shall be defined as the time from 12:00 midnight to 12:00 midnight. The log shall list all devices and personnel deployed within the limits of construction for each day and shall be available for review by ENGINEER at all times.

In subsection 630.09, first paragraph, delete the first sentence and replace with the following:

CONTRACTOR shall designate an individual, other than the superintendent, to be the traffic control supervisor.

In subsection 630.09, second paragraph, delete parts (1), (5), and (6) and replace with the following:

- (1) Preparing, revising, and implementing each required method of handling traffic in accordance with the traffic control plan.
- (5) Preparing traffic control diary on every calendar day traffic control devices are in use. This diary shall be submitted to ENGINEER daily and become a part of the Department's project records.
- (6) Inspecting traffic control devices on every calendar day that traffic control devices are in use, masked, or turned away from traffic. These inspections shall include at least one night inspection per week. These inspections shall be performed by the traffic control supervisor or another representative who is certified as a worksite traffic supervisor.
- (10) Supervising the cleaning and maintenance of all traffic control devices.

In subsection 630.09, delete the third paragraph and replace with the following:

Traffic control management shall be provided by a certified traffic control supervisor on a 24-hour-per-day basis. The traffic control supervisor or another representative who is certified as a worksite traffic supervisor shall be available and reasonably accessible to the job site on every working day, on call at all times, and available upon ENGINEER's request at other than normal working hours. During non-work periods, the traffic control supervisor or another representative shall respond to the job site within 45 minutes. The traffic control supervisor or another representative who is certified as a worksite traffic control supervisor shall arrive at the job site within two hours after notification. CONTRACTOR shall maintain a 24-hour telephone number at which the traffic control supervisor can be contacted. The traffic control supervisor shall not act as a flagger except in an emergency or in relief for short periods of time.

In subsection 630.11, delete the first paragraph and replace with the following:

630.11 General. Portable construction traffic signs shall be removed when temporarily not required. Permanently mounted construction traffic signs shall be masked or turned away from traffic when temporarily not required. When work is suspended, or the project is in free time, and there is no condition requiring traffic control devices or construction traffic signs, all of the construction traffic signs shall be masked or turned away from traffic. If this condition is to exist for more than 30 days, all construction traffic signs shall be removed. When storing portable signs or supports within the project they shall be stored laying flat and the location shall be at least four feet outside

the edge of the shoulder and not on landscaped areas or sidewalks. When masking is used, it shall be done in accordance with subsection 630.10.

The retroreflective surfaces of all signs and other traffic control devices shall be cleaned as frequently as necessary to preserve their legibility and retroreflectivity. However, all devices shall be cleaned a minimum of once every two weeks.

In subsection 630.12, first paragraph, delete the fifth sentence and replace with the following:

When storing portable signs or supports within the project they shall be removed beyond the clear zone and shall not be visible to traffic. All storage areas shall be approved. The minimum clear zone distance shall be 18 feet, measured from the edge of traveled way. If the signs cannot be stored at least 18 feet from the traveled way, they shall be removed. Under no circumstances shall signs be stored on the paved surface.

3.4 FLAGGING

Subsection 630.13(a) shall include the following:

The flagger's STOP/SLOW sign paddle shall be 18 inches with letters six inches high.

Delete Subsection 630.13(a) and replace with the following:

- (a) CONTRACTOR shall provide all flagging through the project necessary to assure proper safety to traffic. All flagging personnel shall be certified by the American Traffic Safety Services Association (ATSSA).

PART 4 - MEASUREMENT AND PAYMENT

4.1 CONSTRUCTION ZONE TRAFFIC CONTROL

Construction Zone Traffic Control shall be paid for at the lump sum price indicated in the Schedule of Unit Prices. The lump sum price shall be full compensation for flagging and for furnishing, erecting, cleaning, maintaining, moving, removing, and disposing of construction traffic control devices, including labor, material equipment, and incidentals necessary to complete the work. All construction traffic control devices, which are not permanently incorporated into the project, will remain the property of CONTRACTOR.

Traffic Control Supervisor will not be paid for separately but shall be included in the work. General Contractor is required to approve and monitor the subcontractor's traffic control.

Preparation of the MHT will not be paid for separately but shall be included in the work.

Construction fencing and temporary walkways will not be paid for separately but shall be included in the work.

Construction phasing and staging will not be paid for separately but shall be included in the work.

Temporary pavement markings, including installation and removal of “tabs”, will not be paid for separately but shall be included in the work.

Any existing markings that conflict with proposed construction traffic control shall be obliterated and will not be paid for separately but shall be included in the work.

- END OF SECTION –

SECTION 07900 – CRACK SEALANT

PART 1 - GENERAL

PART 2 - RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.
- B. **SUMMARY**
- C. This Section includes the following:
 - 1. Sealant for crack repair in asphalt paved surfaces.
- D. Product Data: For each sealant product indicated.
- E. Product Certificates: Signed by manufacturers of crack sealants certifying that products furnished comply with requirements and are suitable for the use indicated.

2.2 DELIVERY, STORAGE, AND HANDLING

- A. Deliver materials to Project site in original unopened containers or bundles with labels indicating manufacturer, product name and designation, color, expiration date, pot life, curing time, and mixing instructions for multi-component materials.
- B. Store and handle materials to comply with manufacturer's written instructions to prevent their deterioration or damage due to moisture, high or low temperatures, contaminants, or other causes.

2.3 PROJECT CONDITIONS

- A. Environmental Limitations: Do not proceed with installation of crack sealants under the following conditions:
 - 1. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 40 deg F (4.4 deg C).
 - 2. When crack substrates are wet.
- B. Joint-Width Conditions: Do not proceed with installation of crack sealants where joint widths are less than or greater than that allowed by crack sealant manufacturer for application indicated.

- C. Joint-Substrate Conditions: Do not proceed with installation of crack sealants until contaminants capable of interfering with their adhesion are removed from joint substrates.

PART 3 - PRODUCTS

3.1 MATERIALS, GENERAL

- A. Compatibility: Provide crack sealants, and other related materials that are compatible with one another and with joint substrates under conditions of service and application, as demonstrated by joint sealant manufacturer based on testing and field experience. Sealant shall be DEERY 102 Sealant or approved equal.

3.2 HOT-APPLIED JOINT SEALANTS

- A. Single component hot applied crack sealant. Exceeds the requirements of ASTM D6690 Type II.

<u>TEST</u>	<u>TEST METHOD</u>	<u>SPECIFICATION</u>
Cone Pen @ 77° F (25°C)	ASTM D-5329	90 max.
Resilience	ASTM D-5329	60% min.
Softening Point	ASTM D-5329	80° C min.
Bond @ -29° C, 50% ext., 12.5 mm sample	ASTM D-5329	Pass 3 cycles
Flow @ 60° C, 5h	ASTM D-5329	3 mm max.
Asphalt Compatibility	ASTM D-5329	Complete
Recommended Application Temperature	ASTM D-5167	380-400°F (193-204°C)*
Maximum Heating Temperature	ASTM – D6690	400°F (204°C)

*Temperature of product measured at pavement surface. Use highest Recommended Application Temperature in cool weather. Prolonged heating at or above Recommended Application Temperature may severely damage product.

PART 4 - EXECUTION

4.1 EXAMINATION

- A. Examine joints indicated to receive crack sealants, with Installer present, for compliance with requirements for joint configuration, installation tolerances, and other conditions affecting crack sealant performance.
- B. Proceed with installation only after unsatisfactory conditions have been corrected.

4.2 CONSTRUCTION REQUIREMENTS

- A. All cracks greater than ¼ inch and less than 1-inch shall be cleaned and filled to the level of the surface of the pavement. This includes transverse cracks, longitudinal cracks and cracks around manholes and water valves. This criteria will be verified by the ENGINEER during construction. Cracks less than ¼ inch in width shall not be filled.

- B. No crack sealer shall be installed at the joint between the concrete gutter lip and asphalt pavement on local and collector streets. No crack sealing of alligator cracking or block cracking unless directed by the ENGINEER.
- C. Crack sealing shall be accomplished only when the ambient temperature is forty (40) degrees F and rising and weather conditions are dry.
- D. Cracks shall be free of dust, dirt, moisture, vegetation, or other materials that prevent bonding of the hot sealant.
- E. All cracks shall be cleaned of loose and foreign material with compressed air (min. 120 P.S.I.) to a depth approximately twice the crack width or as determined by the ENGINEER and the surface application areas shall be dried. The use of a hot compressed air heat lance shall be used to dry and warm the adjacent asphalt immediately prior to placing the sealant. Heat lance equipment will consist of an air compressor capable of delivering a steady flow of air at a minimum of 120 PSI and a heating apparatus capable of sustaining air temperatures at a minimum of 750 degrees F. A heat lance will be used when the pavement and or ambient temperatures are below 60 degrees F and when there is moisture present in the cracks. Direct flame dryers shall not be used.
- F. Immediately following the filling of the crack, excess sealant shall be leveled off with an approved squeegee method, a shoe attached to the applicator wand and shall be used to smooth the material tightly against the surface so when the sealant is cured, its surface in the crack is from 1/16-inch below to flush with the adjacent pavement surface. The squeegeed material shall be centered on the crack and the total width of the sealant band on the pavement surface over the center line of the crack shall not be less than two (2) inches or greater than three (3) inches after it has been smoothed.
- G. Traffic shall be kept off the freshly sealed cracks until the sealant has cured.

The CONTRACTOR shall use crack sealant barrier blotter material available on the project to prevent tracking or pulling. Crack sealant barrier blotter material shall be:

Dry, gritty sand conforming to the fine aggregate gradation of Table 703-1 of the Colorado Department of Transportation Standard Specifications for Road and Bridge Construction, 2017 Edition, Section 703. Samples shall be submitted to the Engineer meeting these requirements. Black Beauty shall not be used as sealant barrier blotter material.

After the installation of the sealant barrier blotter material and cure of the crack sealant, the street shall be swept. Excess sealant barrier blotter material shall be removed and disposed of by the CONTRACTOR. Crack sealant barrier blotter material shall be installed, removed, and disposed of at the CONTRACTOR's expense and shall be incidental to the work.

Sealant material picked up or pulled out after being placed shall be replaced at the CONTRACTOR's expense. The CONTRACTOR shall be responsible for the cleaning of vehicles and tires in the event traffic is allowed on crack sealant that is not cured.

- H. Prior to the CONTRACTOR leaving each work area, the street, driveways and sidewalks shall be thoroughly swept and cleaned.

4.3 COST REDUCTION

- A. All crack sealing work which is determined to have been done under this contract without the required crack preparation or as determined by the ENGINEER will be deleted as a pay item, without compensation for any labor, materials, equipment, etc.

The following method will be used to compute pay items deletion:

1. Blown Cracks – Average length per pound of material in place (6 LF).

4.4 EQUIPMENT

- A. All equipment and tools used in the performance of this work shall be maintained in satisfactory working condition at all times to ensure a high quality product. Descriptive information about equipment and procedures for successful crack filling to be used shall be submitted to the ENGINEER for approval prior to starting the work.
- B. The equipment used to heat the sealant shall be capable of heating the sealant material according to the manufacturer's recommendations and be equipped with a calibrated thermometer. Also, equipment shall have a positive means to keep the sealant agitated and thoroughly mixed during sealing activities.

*Equipment found to be leaking or malfunctioning shall be repaired or replaced immediately after notification by the ENGINEER.

- C. The sealant shall be held in the mixing tank at the application temperature specified by the material's manufacturer. Additional sealant may be added to the mixing tank as long as the minimum temperature stated by the material's manufacturer is maintained. Wands used to deliver hot crack sealing material shall not leak and have a positive shut off. Application can be by hand-held or wheeled pour pots or use of a pressure applicator.

4.5 SCHEDULES

- A. The CONTRACTOR shall provide a daily schedule for the project to the ENGINEER. This schedule shall include, daily locations listed for entire week.

PART 5 - SPECIAL CONDITIONS

5.1 SPECIAL PROVISIONS

- A. The City of Louisville, Colorado, "Design and Construction Standards," adopted February 15, 1994 and the latest revisions thereto, is made a part of these

specifications.

- B. The Colorado Department of Transportation (CDOT) Standard Specifications for Road and Bridge Construction and the CDOT M&S Standards, latest editions, are made a part of these specifications.

In case of conflict the following documents are listed in order of priority:

- 1. Special Provisions,
 - 2. Technical Specifications,
 - 3. City Design and Construction Standards,
 - 4. CDOT Specifications and Standards.
- C. The OWNER will not be responsible for any construction down time or associated costs due to failure of the CONTRACTOR's equipment or operation, conflicts, or failure to schedule traffic control in advance with the OWNER.
- D. During and at the completion of each workday, the CONTRACTOR shall clean up all construction materials and leave the construction site in a safe condition to all pedestrians, motorists and the public.
- E. Waste material, which is deemed not reusable by the OWNER shall be legally disposed of by the CONTRACTOR at his own expense.
- F. Driveways shall be closed for a minimum amount of time. The CONTRACTOR shall coordinate driveway closures with property owners.
- G. All material used on this project shall not be removed, transported or used on other work sites during the contract time. Melters/pots used to heat and store material to be applied on this project shall not be used on other work sites during the process of the contract.
- H. The CONTRACTOR shall keep track of the amount of LBS. used on each street and submit to the OWNER on a daily basis. The CONTRACTOR shall keep box tops from the crack sealant used on each street and submit to the OWNER on a daily basis.

PART 6 - METHOD OF MEASUREMENT AND PAYMENT

6.1 METHOD OF MEASUREMENT

1. Scope of Work

This work shall consist of furnishing all labor, materials, equipment, crack sealant, and crack sealant barrier blotter material and incidentals necessary to install CRACK SEALANT to the limits on the plans and as directed by the Engineer. Traffic control for the work shall be incidental and cost merged into the appropriate pay item.

This work shall also consist of street sweeping and loading, haul, and disposal of the removed

crack sealant blotter material.

2. Method of Measurement and Payment

Payment will be made on a per Pound (LB) basis for CRACK SEALANT and shall be full compensation for all work necessary to complete the item.